

Seven Mile Bridge on Seven Mile Road MP 2.30 To MP 2.55 | CRP 20-06


BIDDER'S Q&A 01 | April 13, 2026

Questions and Answers as of 04/13/2026:

1. Does this bid need to be turned in by mail or can it be submitted online?
All bids need to be delivered to the commissioner's office (see official call for bids). They can be delivered by mail or in-person.
2. Is there going to be a pre-bid meeting for this project?
There is no pre-bid meeting scheduled for this project.
3. I saw no field coatings on the concrete. Will an addendum be coming out to add coatings?
There are no coatings for the concrete on this project.
4. Were the wingwalls and abutments designed to support girder erection crane loading?
Construction loads were considered in the design of the abutments and wingwalls. The specific placement of the crane and component loading of the abutment/wall would need to be evaluated depending on the setup of the specific crane proposed.
5. Is an in-water work extension possible?
The contractor can contact WDFW to see if an extension is possible. I would plan on just the dates that are permitted.
6. When do you anticipate the county to issue NTP for this project?
NTP will likely be issued no earlier than the last full week of May, as of right now. Currently WSDOT crews are scheduled to be onsite starting May 18th to remove the temporary bridge, which removal should be completed by the end of that week. Once the bridge is removed, we can issue the NTP any time after we have a signed contract.
7. Is the 6" PVC sleeve Schedule 40, Schedule 80, or something else?
Schedule 40 , see note 2 on sheet C-101
8. What inserts for the sleeve hangers are required?
Girder inserts for hanger shown on S-502 section A for exterior girder.

9. The drawings state that the Electrical nearest the north end of the bridge will be moved by “others”. How far away from the abutment will the electrical be moving?

Per D-101, this pole (highlighted below) has been moved approx. 40 FT North along the run of the current power line.

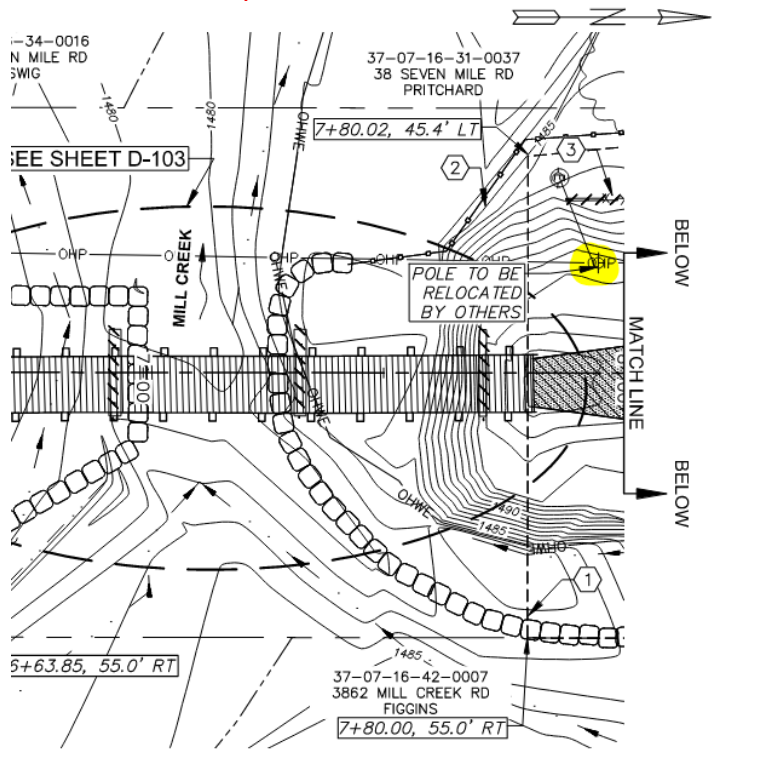

10. Can the power to the power lines be turned off during crane operations?

Please see the utilities section of division 1-07 in the special provisions regarding the de-energization of the powerlines.

11. The Bidder's Questionnaire form asks for the Federal Aid number and the Contract Number. I see three numbers on the front of the project specifications. Can you please clarify which numbers are what so that we use them in the correct places on the bid forms?

Federal Aid No.: BROS-2036(038)

Contract No.: TA-8472