

# **Addendum No. 1**

For Construction of

## **Town of Winthrop SR 20 Chewuch Bridge Pedestrian Underpass Project**

Prepared by:

SCJ Alliance  
25 Wenatchee Ave, Suite 238  
Wenatchee, WA 98801

The above-mentioned CONTRACT PROVISIONS AND PLANS have been reviewed and approved for advertisement. Such a review includes all plans, specifications, and permits associated with the project.

Prepared by: Dave Allen, PE, SCJ Alliance  
May 11, 2026

**Addendum No. 1**  
**ISSUED: May 11, 2026**

Please acknowledge receipt of this Addendum No. 3 on the Bid Proposal Signature Page.

---

---

TO PROSPECTIVE BIDDERS:

The attention of all prospective bidders on the above project is directed to the following modifications and additions to the Contract Documents, which are hereby made a part of the Contract Provisions and Plans.

The Contract Manual sections is amended as follows:

**BID PROPOSAL**

1. Item 28, sipe pinus ponderosa, revise quantity to 1
2. Item 29, psipe cornus sericea, revise quantity to 6
3. Item 30, psipe ribes aureum, revise quantity to 11
4. Item 31, psipe rosa nutkana, revise quantity to 6
5. Item 41, potholing and utility repair, write in unit price and total price of \$2,000.00.
6. Item 55, minor changes, write in unit price and total price of -\$1.00.
7. Item 58, add new item 58 - 110 L.F. "Turbidity Curtain"

A new Bid Proposal is attached.

**CONTRACT SPECIAL PROVISIONS**

**Special Provisions**

1. Add the following to Section 6-01.5 General Requirements for Structures, Work Access, page 31 line 12.

***Measurement***

*The estimated quantity of temporary excavation and embankment to construct the work access road is 470 CY.*

2. Add the following to Section 6-01.5 General Requirements for Structures, Work Access, page 31 line 18.

*The lump sum price bid for "Work Access" shall include all costs for excavating, hauling, temporarily stockpiling and backfilling the work access road prior to trail construction.*

Revisions are to be made by the Planholder.

## CONTRACT DRAWINGS


### 1. Drawing QTY -01, Sheet 2 of 24

1. Item 28, sipe pinus ponderosa, revise quantity to 1
2. Item 29, psipe cornus sericea, revise quantity to 6
3. Item 30, psipe ribes aureum, revise quantity to 11
4. Item 31, psipe rosa nutkana, revise quantity to 6
5. Item 41, potholing and utility repair, write in unit price and total price of \$2,000.00.
6. Item 55, minor changes, write in unit price and total price of -\$1.00.
7. Add Item 58, Plan Quantity = 110 L.F. Turbidity Curtain

Revisions are to be made by the Planholder.

### 2. Drawing DM-01, Sheet 4 of 24

1. Add a Turbidity Curtain located along the inside edge of the temporary stream diversion as illustrated below

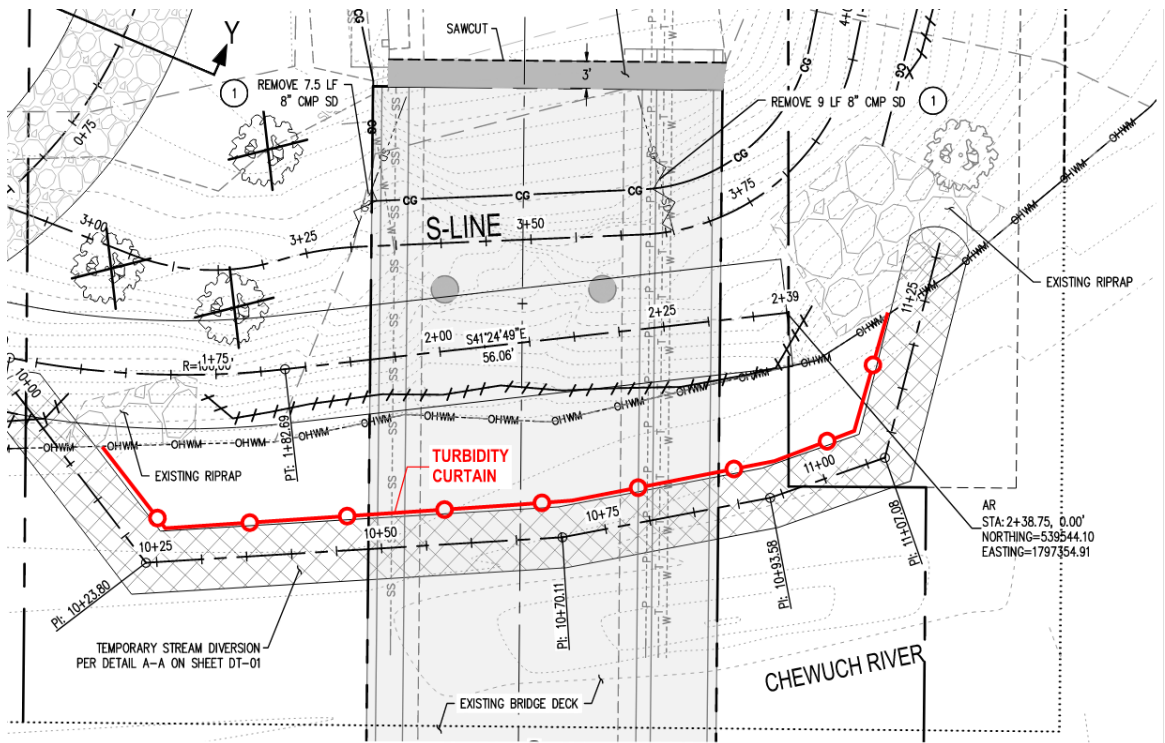

Revisions are to be made by the Planholder.

## Bidder Questions & Responses

The following questions and comments have received during the project bid advertisement period. The Responses to these are to be included as part of this Addendum:

### Question

1:

On sheet SN4.0, the Grouted Vertical Element Type 1 detail indicates the element is to be cut off 2' below finished grade. Please clarify if the reinforcing steel is required to extend to the top of the element, or if it is acceptable to terminate the bar approximately 2' below grade and remove only the grout above.

**Response 1:** Yes it is acceptable to terminate the reinforcing steel 2' below top of grout.

### Question 2:

Who is responsible for de-fishing inside the coffer dam once it has been constructed?

**Response 2:** The Town of Winthrop will be responsible for de-fishing inside the cofferdam.

## Attachments

1) New Bid Proposal

All bidders must acknowledge receipt of this Addendum by signing the Bid Proposal Signature Page.

End of Addendum

## BID PROPOSAL - ADDENDUM 1

ITEM #	QUANTITY	UNIT	ITEM DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	1	L.S.	MOBILIZATION		
2	0.50	ACRE	CLEARING AND GRUBBING		
3	1	L.S.	REMOVAL OF STRUCTURES AND OBSTRUCTIONS		
4	4	EACH	TREE REMOVAL		
5	50	C.Y.	ROADWAY EXCAVATION INCL. HAUL		
6	40	C.Y.	EMBANKMENT COMPACTION		
7	40	TON	CRUSHED SURFACING TOP COURSE		
8	120	TON	CRUSHED SURFACING BASE COURSE		
9	30	TON	COMMERCIAL HMA		
10	5	TON	HMA CL 1/2 IN PG 64H-28		
11	35	L.F.	DRAIN PIPE 8 IN. DIAM.		
12	12	L.F.	SCHEDULE A STORM SEWER PIPE 12 IN. DIAM.		
13	1	EACH	CONCRETE INLET		
14	1	EACH	CATCH BASIN TYPE 1		
15	20	LF	INFILTRATION TRENCH		
16	1	EACH	CONNECTION TO DRAINAGE STRUCTURE		
17	350	C.Y.	REUSE HEAVY LOOSE RIPRAP		
18	150	C.Y.	ROCK FOR EROSION AND SCOUR PROTECTION CLASS CHEWUCH		
19	150	C.Y.	QUARRY SPALLS		
20	780	S.F.	CONCRETE FASCIA PANEL		
21	44	EACH	SOIL NAIL - ENCAPSULATED		
22	4	EACH	SOIL NAIL VERIFICATION TEST AND SOIL NAIL PROOF TEST		
23	30	S.Y.	PREFABRICATED DRAINAGE MAT		
24	110	EACH	GROUTED VERTICAL ELEMENT		
25	1	L.S.	EROSION /WATER POLLUTION PREVENTION		
26	10	DAY	ECS LEAD		
27	180	L.F.	HIGH VISIBILITY SILT FENCE		
28	1	EACH	PSIPE PINUS PONDEROSA		
29	6	EACH	PSIPE CORNUS SERICEA		
30	11	EACH	PSIPE RIBES AUREUM		

## BID PROPOSAL - ADDENDUM 1

ITEM #	QUANTITY	UNIT	ITEM DESCRIPTION	UNIT PRICE	TOTAL PRICE
31	6	EACH	PSIPE ROSA NUTKANA		
32	6	EACH	PSIPE SYMPHORICARPOS ALBUS		
33	16	EACH	PSIPE SALIX LASIANDRA/SALIX EXIGUA		
34	1	L.S.	TEMPORARY STREAM DIVERSION CHEWUCH RIVER		
35	0.40	ACRE	SEEDING, FERTILIZING & MULCHING		
36	170.00	L.F.	COMPOST SOCK		
37	6.0	EACH	FLEXIBLE DELINEATORS		
38	1	L.S.	PROJECT TEMPORARY TRAFFIC CONTROL		
39	1	L.S.	PEDESTRIAN TRAFFIC CONTROL		
40	1	L.S.	ROADWAY SURVEYING		
41	1	DOL.	POTHOLING AND UTILITY REPAIR	\$2,000.00	\$2,000.00
42	1	L.S.	TRIMMING AND CLEANUP		
43	1	L.S.	SPCC PLAN		
44	15	EACH	STAIR STEPS		
45	70	S.Y.	CEMENT CONC. SIDEWALK		
46	35	S.Y.	CEMENT CONC. SIDEWALK - 6 IN. DEPTH		
47	176	L.F.	STEEL PIPE HANDRAIL		
48	74	L.F.	FALL PROTECTION METAL HANDRAIL		
49	68	L.F.	FALL PROTECTION FENCE		
50	42	L.F.	STAIR HANDRAIL		
51	60	L.F.	SPLIT RAIL FENCE		
52	860	S.F.	SHOTCRETE FACING		
53	755	S.F.	STRUCTURAL EARTH WALL		
54	210	C.Y.	GRAVEL BACKFILL FOR STRUCTURAL EARTH WALLS INCL. HAUL		
55	1	CALC.	MINOR CHANGES	-\$1.00	-\$1.00
56	1	L.S.	WORK ACCESS-CHEWUCH RIVER		
57	1	L.S.	RECORD DRAWINGS		
58	110	L.F.	TURBIDITY CURTAIN		

BID TOTAL \_\_\_\_\_