
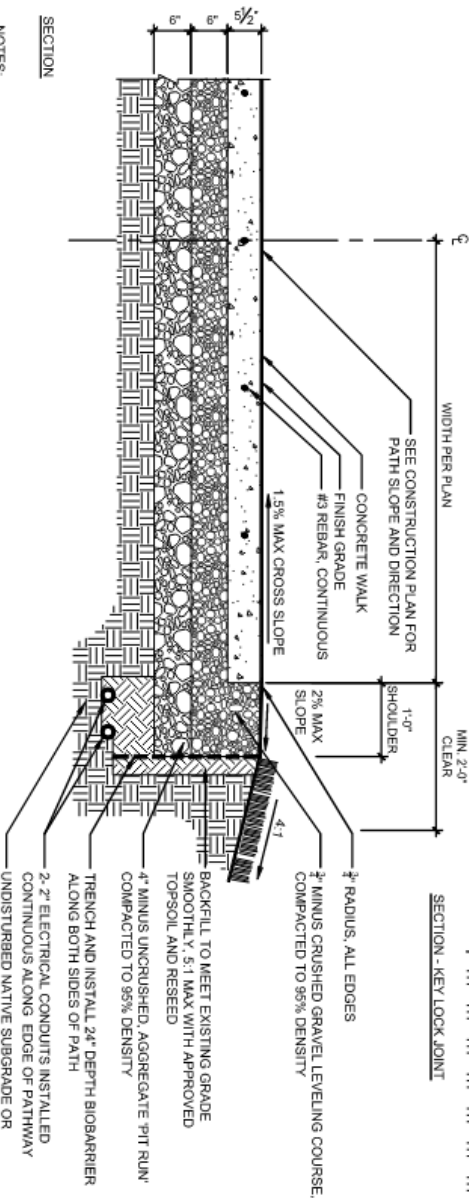


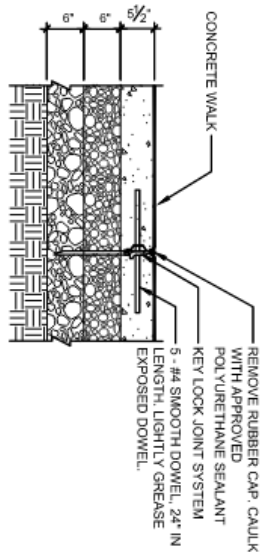

- NOTES:
1. ALL CONCRETE TO BE 4,000 PSI, TYPE I, SUBMIT MIX DESIGN TO BOISE PARK & RECREATION FOR APPROVAL.
  2. ALL CONCRETE TO INCLUDE FIBERWESH REINFORCEMENT ADDITIVE INSTALLED PER SPECIFICATIONS.
  3. ALL CONCRETE SURFACES TO BE FINISHED WITH A MEDIUM BROOM FINISH PERPENDICULAR TO THE DIRECTION OF TRAVEL.
  4. SCORE JOINTS SHALL BE PLACED TO MATCH WIDTH OF WALK NOT TO EXCEED EVERY 10' SPACING IN BOTH LONGITUDINAL AND TRANSVERSE DIRECTION FOR WALKS GREATER THAN 5' IN WIDTH. **SAME CUT JOINTS ONLY AND HAND TOoled JOINTS ALLOWED.** JOINTS TO MATCH EXISTING. JOINTS SHALL BE 1/3 TOTAL DEPTH OF SLAB.
  5. EXPANSION JOINTS SHALL HAVE A KEY JOINT 40' O.C.
  6. RUNNING SLOPE NOT TO EXCEED 5%.
  7. ROOT CUT BOTH SIDES OF PATH A MINIMUM OF 24\"/>
  8. IF WALK IS PLACED ADJACENT TO CURB, JOINTS SHALL MATCH CURB JOINTS TO THE GREATEST EXTENT POSSIBLE AND SHALL BE PERPENDICULAR TO THE CURB.
  9. FORM AREA ON EACH SIDE OF THE WALK SHALL BE BACKFILLED WITH APPROVED MATERIAL OR SPECIFIED TOPSOIL TO WITHIN 1\"/>
  10. ALL CONSTRUCTION (COLD) JOINTS SHALL BE DOWELED WITH 12\"/>
  11. RUNNING SLOPE NOT TO EXCEED 5%, UNLESS OTHERWISE NOTED.

12. 6\"/>
13. BASE ROCK SHALL BE MINIMUM OF 12\"/>
14. PAVEMENT MARKINGS TO BE PER I.S.P.W.C. SECTION 1104.
15. ALL CONSTRUCTION SHALL CONFORM TO THE CURRENT ADDITION OF THE IDAHO STANDARDS FOR PUBLIC WORKS CONSTRUCTION (ISPMC) AND THE ACPD SUPPLEMENTAL SPECIFICATIONS EXCEPT AS MODIFIED BY THE PROJECT SPECIAL PROVISIONS.
16. PLACE MINIMUM 3 - #3 REBAR IN WALK EVENLY SPACED IN LONGITUDINAL DIRECTION PER SCHEDULE BELOW.

| REBAR SCHEDULE |                              |  |
|----------------|------------------------------|--|
| SIDEWALK WIDTH | AMOUNT OF LONGITUDINAL REBAR |  |
| 12'-0"         | 5                            |  |
| 16'-0"         | 5                            |  |
| 20'-0"         | 5                            |  |
| 24'-0"         | 5                            |  |

17. CONTRACTOR TO INSTALL TWO (2) - TWO (2) INCH DIAMETER ELECTRICAL CONDUIT AT 24\"/>
18. INSTALL ELECTRICAL JUNCTION BOX AT APPROXIMATELY 500' O.C. ALONG PROPOSED PATH OR AS SHOWN. BOX TO BE QUATZITE POLYMER CONCRETE BOX 18\"/>

SCALE: 3/8" = 1'-0"



## MULTI-USE PATH - CONCRETE

|              |               |
|--------------|---------------|
| 321313.33-03 |               |
| REVISIONS    |               |
| DATE         | DESCRIPTION   |
| 7/25/2025    |               |
| 9/23/2025    |               |
| 4/6/2026     | Revised Notes |