INDEX - VOLUME 1

SHEET NO.	PLAN REFERENCE NO.	TITLE
1	IN1	INDEX
2	VM1	VICINITY MAP
3 - 6	SQ1 - SQ4	SUMMARY OF QUANTITIES

INDEX - VOLUME 2

SHEET NO.	PLAN REFERENCE NO.	TITLE
7	CT1	CERTIFICATION SHEET
8 - 11	RS1 - RS4	ROADWAY SECTIONS
12	QTTB1	QUANTITY TABULATION - TEMPORARY BYPASS
13 - 14	TB1 - TB2	TEMPORARY BYPASS PLAN
15	TBS1	TEMPORARY BYPASS ROADWAY SECTIONS
16	TBP1	TEMPORARY BYPASS ROADWAY PROFILE
17	TPB1	TEMPORARY PEDESTRIAN BYPASS PLAN
18	TPBP1	TEMPORARY PEDESTRIAN BYPASS PROFILE
19	AL1	ALIGNMENT AND RIGHT OF WAY PLAN
20	QTSP1	QUANTITY TABULATION - SITE PREPARATION AND TESC
21	SP1	SITE PREPARATION AND TESC PLAN
22	EU1	EXISTING UTILITIES
23	RP1	ROADWAY PROFILE
24	EC1	ENVIRONMENTAL COMPLIANCE PLAN
25	SNDR1	STRUCTURE NOTES - DRAINAGE
26	DR1	DRAINAGE PLAN
27 - 29	DP1 - DP3	DRAINAGE PROFILES
30	DD1	DRAINAGE DETAILS

INDEX - VOLUME 2 (CONT.)

SHEET NO.	PLAN REFERENCE NO.	TITLE
31	OC1	OVERFLOW CHANNEL PLAN
32 - 34	OCS1 - OCS3	OVERFLOW CHANNEL SECTIONS
35	OAD1	OVERFLOW ALIGNMENT AND DETAILS
36	OCP1	OVERFLOW CHANNEL PROFILE
37 - 38	OCWP1 - OCWP2	OVERFLOW CHANNEL WALL PROFILES
39	UT1	UTILITY LEGEND & ABBREVIATIONS
40	UT2	TEMPORARY WATER MAIN PLAN AND PROFILE
41	UT3	TEMPORARY FORCE MAIN PLAN AND PROFILE
42	UT4	WATER MAIN PLAN AND PROFILE
43	UT5	FORCE MAIN PLAN AND PROFILE
44	UT6	UTILITY DETAIL - PIPE CASING
45	SPP1	SOIL PREPARATION PLAN
46	LS1	LANDSCAPE PLANTING PLAN
47 - 51	LD1 - LD5	LANDSCAPE DETAILS
52	QTPV1	QUANTITY TABULATION - PAVING AND PAVEMENT MARKING
53	PV1	PAVING AND PAVEMENT MARKING PLAN
54	PVD1	PAVING DETAILS
55 - 104	BA1 - BA50	BRIDGE PLANS
105 - 114	TC1 - TC10	TRAFFIC CONTROL PLAN
115 - 118	CS1 - CS4	CONSTRUCTION SIGNING PLAN
119	DU1	DETOUR PLAN

PLAN REFERENCE NO.

SHEET OF SHEETS

NOTE: ALL SHEET REFERENCES, FIRST NOS. OF STRUCTURE CODE DESIGNATIONS AND MATCH LINE SHEET REFERENCES, ETC., THROUGHOUT THE PLANS, REFER TO THE ENTRY IN THE PLAN REFERENCE NUMBER BOX.

FILE NAME	T:\412334\XL6549 SR 544 Nooksack Overflow Repair_CAE\CAD\ContractPlans\XL6549_010_PS_IN.dgn				
TIME	4:30:59 PM			REGION NO. 10	STATE WASH
DATE	9/24/2026				
PLOTTED BY	hardoug			JOB NUMBER 26A012	FED.AID PROJ.NO. 2C01006-4
DESIGNED BY	D. HARRIS				
ENTERED BY	D. HARRIS				
CHECKED BY	E. WINTER			CONTRACT NO.	LOCATION NO.
PROJ. ENGR.	S. BEIER				
REGIONAL ADM.	B. NIELSEN	REVISION	DATE	BY	

P.E. STAMP BOX — DATE

P.E. STAMP BOX — DATE

Washington State Department of Transportation

SR 544
NOOKSACK RIVER OVERFLOW CULVERT ER PERMANENT REPAIR


INDEX


Plot 1

PLAN REF NO IN1

SHEET 1 OF 119 SHEETS

R. 4E., W.M. SEC. 31

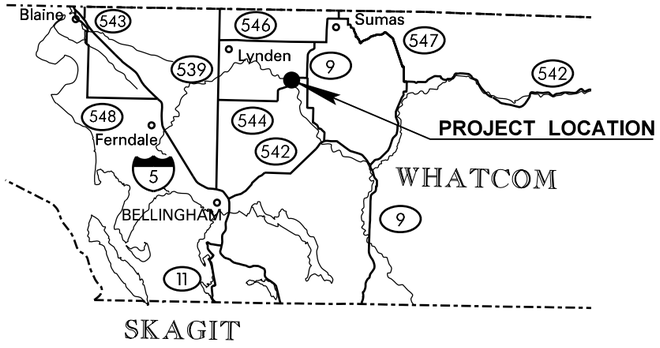

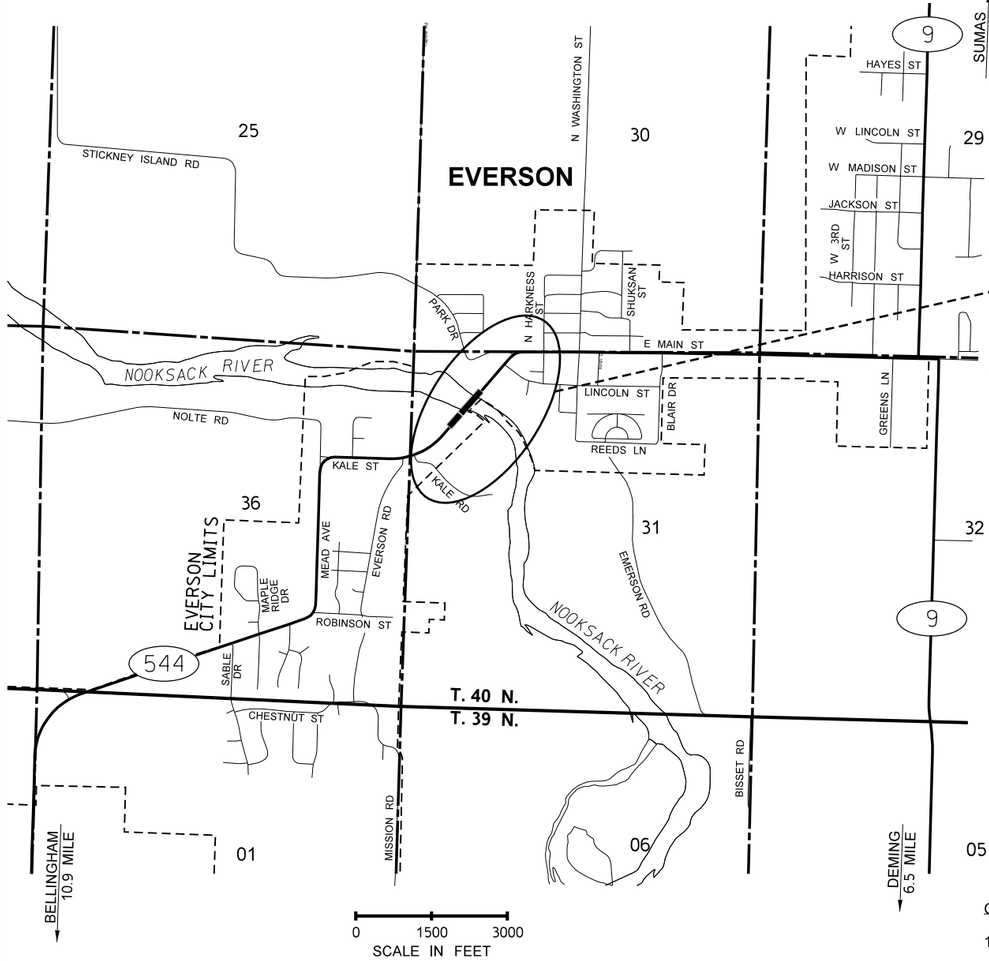


BEGIN F.A. 2C01006-4
BEGIN PROJECT
SR 544 MP 7.54
E 397+96.52 P.O.B. =
RW 397+96.52

END CONSTRUCTION
TEMPORARY BYPASS
TB 20+01.11 P.O.E.=
E 407+80.31 (0.24' LT)

BEGIN CONSTRUCTION
OVERFLOW CHANNEL
O 97+89.71 P.O.B.=
E 403+53.64 (210.29' LT)

BEGIN CONSTRUCTION
TEMPORARY BYPASS
TB 10+00.00 P.O.C.=
E 397+96.52 (1.49' RT)

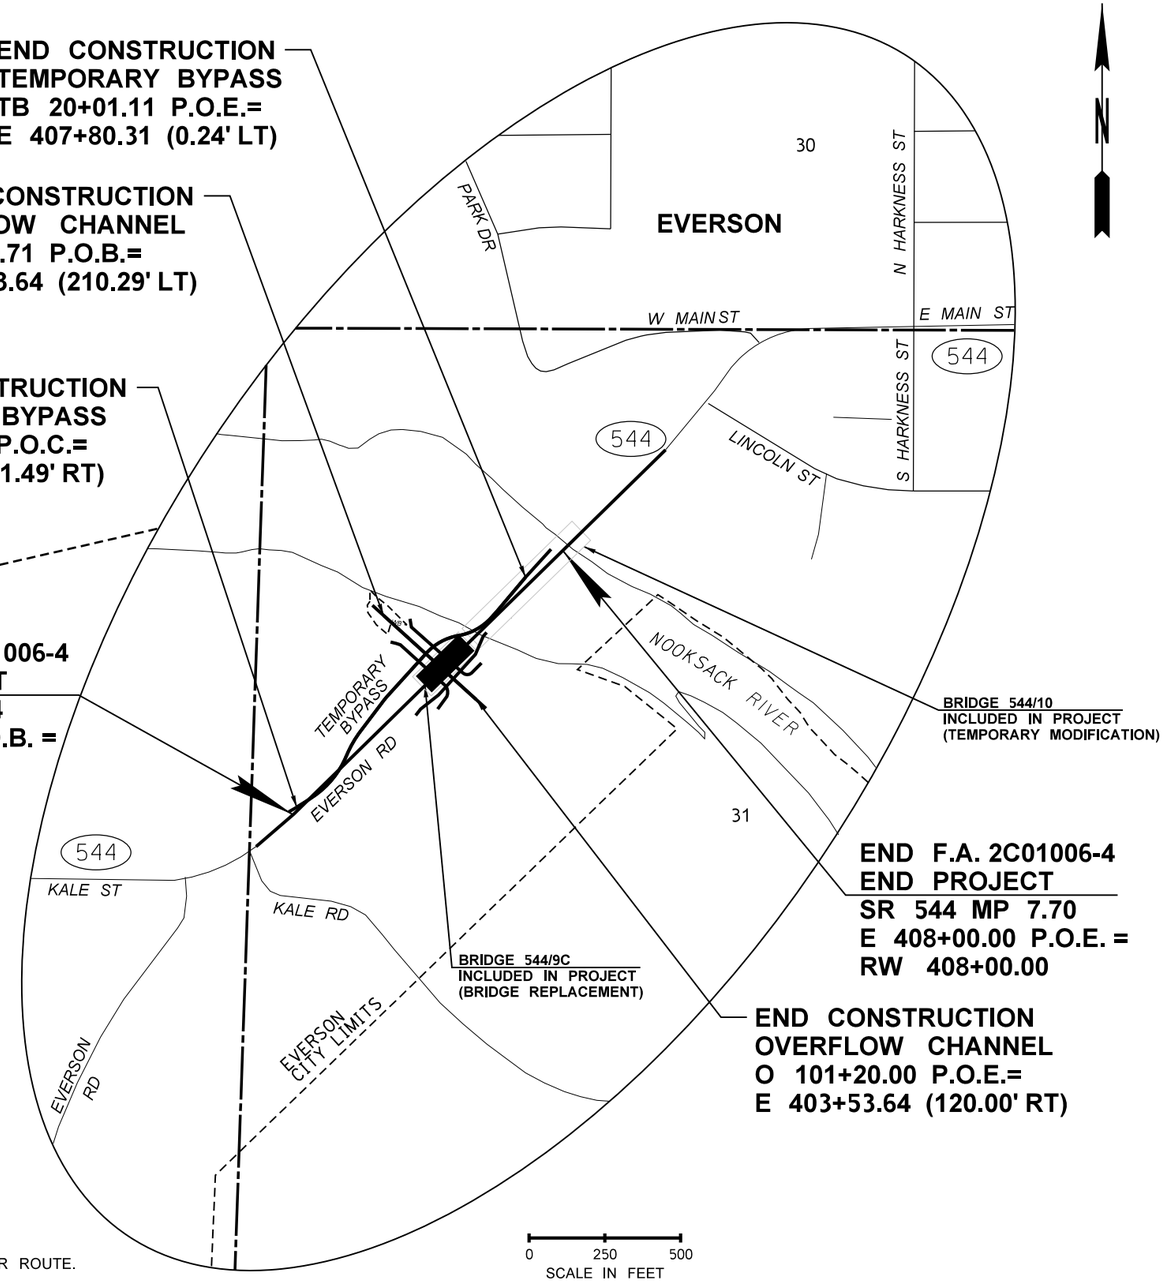

END F.A. 2C01006-4
END PROJECT
SR 544 MP 7.70
E 408+00.00 P.O.E. =
RW 408+00.00

END CONSTRUCTION
OVERFLOW CHANNEL
O 101+20.00 P.O.E.=
E 403+53.64 (120.00' RT)

GENERAL NOTES:

1. SEE DU1 FOR DETOUR ROUTE.

FILE NAME	T:\412334\XL6549 SR 544 Nooksack Overflow Repair_CAE\CAD\ContractPlans\XL6549_020_PS_VM.dgn				REGION NO. 10	STATE WASH	FED.AID PROJ.NO.
TIME	4:30:15 PM						
DATE	9/24/2026				JOB NUMBER 26A012		
PLOTTED BY	hardoug						
DESIGNED BY	D. HARRIS				CONTRACT NO.		LOCATION NO.
ENTERED BY	D. HARRIS						
CHECKED BY	E. WINTER						
PROJ. ENGR.	S. BEIER						
REGIONAL ADM.	B. NIELSEN	REVISION	DATE	BY			

P.E. STAMP BOX — DATE

P.E. STAMP BOX — DATE

Washington State Department of Transportation

SR 544
NOOKSACK RIVER OVERFLOW CULVERT ER PERMANENT REPAIR

VICINITY MAP

Plot 1

PLAN REF NO **VM1**

SHEET **2** OF **119** SHEETS

SUMMARY OF QUANTITIES

10/12/2026

ITEM NO	TOTAL QUANTITY	SUB-TOTAL * SECTION I-07.2(1) OF STANDARD SPECS	SUB-TOTAL ** SECTION I-07.2(2) OF STANDARD SPECS	STD. ITEM NO.	UNIT	ITEM	GROUP 1 SR 544 MP 7.54 TO MP 7.70	GROUP 1 BRIDGE NO. 544/9	GROUP 1 BRIDGE NO. 544/10	GROUP 2 REIMB. FOR THIRD PARTY DAMAGE
						1-PREPARATION				
1	LUMP SUM		LUMP SUM	0001	L.S.	MOBILIZATION	L.S.			
2	1.06		1.06	0025	ACRE	CLEARING AND GRUBBING	1.06			
3	LUMP SUM		LUMP SUM	0050	L.S.	REMOVAL OF STRUCTURES AND OBSTRUCTIONS	L.S.			
4	142,000.00		142,000.00	0256	DOL.	REMOVING SHAFT OBSTRUCTIONS	142,000.00			
5	LUMP SUM		LUMP SUM	0060	L.S.	REMOVING PORTION OF EXISTING STRUCTURE STEEL ARCH CULVERT	L.S.			
6	LUMP SUM		LUMP SUM	0061	L.S.	REMOVING PORTION OF EXISTING BRIDGE NO. 544/10			L.S.	
7	LUMP SUM		LUMP SUM	0070	L.S.	REMOVING EXISTING STRUCTURE STEEL ARCH CULVERT	L.S.			
8	35.00		35.00	0100	S.Y.	REMOVING CEMENT CONC. SIDEWALK	35.00			
9	840.00		840.00	0190	L.F.	REMOVING PLASTIC LINE	840.00			
						2-GRADING				
10	LUMP SUM		LUMP SUM		L.S.	EARTHWORK	L.S.			
						4-DRAINAGE				
11	1.00		1.00	1054	EACH	GRATE INLET TYPE 2	1.00			
12	65.00		65.00	1093	TON	STREAMBED SEDIMENT	65.00			
13	152.00		152.00	0902	TON	STREAMBED COBBLES 8 IN.	152.00			
14	10.00		10.00	0921	TON	ROCK FOR EROSION AND SCOUR PROTECTION CLASS A	10.00			
15	1,580.00		1,580.00	0926	C.Y.	ROCK FOR EROSION AND SCOUR PROTECTION CLASS C	1,580.00			
16	660.00		660.00		TON	CUSTOM FILTER ROCK	660.00			
17	41.00		41.00	1170	L.F.	DRAIN PIPE 6 IN. DIAM.	41.00			
18	5,000.00		5,000.00	3077	DOL.	FISH EXCLUSION ASSISTANCE	5,000.00			
19	5,000.00		5,000.00	3078	DOL.	FISH BLOCK NET MAINTENANCE	5,000.00			
						5-STORM SEWER				
20	3.00		3.00	3091	EACH	CATCH BASIN TYPE 1	3.00			
21	2.00		2.00	3090	EACH	CATCH BASIN TYPE T-PVC	2.00			
22	155.00		155.00	3151	L.F.	TESTING STORM SEWER PIPE	155.00			
23	222.00		222.00	3541	L.F.	SCHEDULE A STORM SEWER PIPE 12 IN. DIAM.	222.00			
24	100.00		100.00	3542	L.F.	SCHEDULE A STORM SEWER PIPE 18 IN. DIAM.	100.00			
25	1.00		1.00		EACH	DUCKBILL CHECK VALVE 18 IN. DIAM.	1.00			
						6-SANITARY SEWER				
26	534.00		534.00	3152	L.F.	TESTING SEWER PIPE	534.00			
27	309.00		309.00	3773	L.F.	DUCTILE IRON SEWER PIPE 10 IN. DIAM.	309.00			
28	225.00		225.00		L.F.	HIGH-DENSITY POLYETHYLENE PIPE FOR FORCE MAIN 10 IN. DIAM.	225.00			
29	304.00		304.00		L.F.	DUCTILE IRON CASING PIPE FOR FORCE MAIN 20 IN. DIAM.	304.00			
30	LUMP SUM		LUMP SUM		L.S.	FUEL TANK RELOCATION	L.S.			
						7-WATER LINES				
31	3.00		3.00	6165	EACH	GATE VALVE 12 IN.	3.00			
32	252.00		252.00	3869	L.F.	DUCTILE IRON PIPE FOR WATER MAIN 12 IN. DIAM.	252.00			
33	302.00		302.00	3937	L.F.	PVC PIPE FOR WATER MAIN 12 IN. DIAM.	302.00			
34	304.00		304.00		L.F.	DUCTILE IRON CASING PIPE FOR WATER MAIN 20 IN. DIAM.	304.00			
						8-STRUCTURE				
35	LUMP SUM		LUMP SUM	4001	L.S.	TEMPORARY BRIDGE PB LINE	L.S.			

GROUP LEGEND

GROUP NUMBER	SR	CONTROL SECTION	TAX SCHEDULE	FUND PARTICIPANTS
1	544	374002	**	Federal
2	544	374002	**	State

DATE	REVISION	BY

REGION	STATE	FEDERAL AID PROJECT NO.
10	**WA**	2C01006-4

JOB NUMBER **26A012/1**

CONTRACT NO

Washington State
Department of Transportation

SR 544
NOOKSACK RIVER OVERFLOW CULVERT
ER PERMANENT REPAIR

SUMMARY OF QUANTITIES

SQ1

SHEET 3 OF 119 SHEETS

SUMMARY OF QUANTITIES

10/12/2026

ITEM NO	TOTAL QUANTITY	SUB-TOTAL * SECTION I-07.2(1) OF STANDARD SPECS	SUB-TOTAL ** SECTION I-07.2(2) OF STANDARD SPECS	STD. ITEM NO.	UNIT	ITEM	GROUP 1 SR 544 MP 7.54 TO MP 7.70	GROUP 1 BRIDGE NO. 544/9	GROUP 1 BRIDGE NO. 544/10	GROUP 2 REIMB. FOR THIRD PARTY DAMAGE
36	LUMP SUM		LUMP SUM	4001	L.S.	TEMPORARY BRIDGE TB LINE	L.S.			
37	LUMP SUM		LUMP SUM	4013	L.S.	SHORING OR EXTRA EXCAVATION CL. A NEW BRIDGE		L.S.		
38	2,692.00		2,692.00		L.F.	CONSTRUCTING 3.5 FT. DIAM SHAFT		2,692.00		
39	388.00		388.00	4088	L.F.	CONSTRUCTING 7 FT. DIAM SHAFT		388.00		
40	96,226.00		96,226.00	4151	LB.	ST. REINF. BAR FOR BRIDGE		96,226.00		
41	16,680.00		16,680.00	4151	LB.	ST. REINF. BAR SCOUR CM SHEET PILE WALL COPING	16,680.00			
42	21.00		21.00	4160	EACH	QA SHAFT TEST		21.00		
43	78.00		78.00	4202	C.Y.	CONC. CLASS 4000 FOR SCOUR CM SHEET PILE WALL COPING	78.00			
44	270.00		270.00	4322	C.Y.	CONC. CLASS 4000 FOR BRIDGE		270.00		
45	734.00		734.00	4269	L.F.	PRESTRESSED CONC. GIRDER (WF50G)		734.00		
46	-1.00		-1.00	4219	DOL.	DEFICIENT STRENGTH CONC. PRICE ADJUSTMENT		-1.00		
47	LUMP SUM		LUMP SUM	4300	L.S.	SUPERSTRUCTURE BRIDGE NO. 544/10			L.S.	
48	LUMP SUM		LUMP SUM	4300	L.S.	SUPERSTRUCTURE NEW BRIDGE		L.S.		
49	663.00		663.00	4410	L.F.	BRIDGE RAILING TYPE BP-22		663.00		
50	442.00		442.00	4117	L.F.	PEDESTRIAN BARRIER		442.00		
51	254.00		254.00	5656	S.Y.	BRIDGE APPROACH SLAB		254.00		
52	193.00		193.00		S.Y.	BRIDGE APPROACH SLAB BRIDGE NO. 544/10			193.00	
53	LUMP SUM		LUMP SUM		L.S.	SCOUR COUNTERMEASURE SHEET PILE WALL	L.S.			
54	278.00		278.00		C.Y.	CELLULAR CONCRETE CLASS 2		278.00		
55	4,170.00		4,170.00		LB.	WELDED WIRE FOR CELLULAR CONC. FILL		4,170.00		
56	LUMP SUM		LUMP SUM		L.S.	PRE-LOADING SHAFTS		L.S.		
57	LUMP SUM		LUMP SUM		L.S.	SAND DRAINS		L.S.		
						9-SURFACING				
58	670.00		670.00	5100	TON	CRUSHED SURFACING BASE COURSE	670.00			
						14-HOT MIX ASPHALT				
59	692.00		692.00	5711	S.Y.	PLANING BITUMINOUS PAVEMENT	692.00			
60	1,020.00		1,020.00	5767	TON	HMA CL. 1/2 IN. PG 58H-22	1,020.00			
61	5,252.00		5,252.00	5830	DOL.	JOB MIX COMPLIANCE PRICE ADJUSTMENT	5,252.00			
62	7,471.00		7,471.00	5835	DOL.	COMPACTION PRICE ADJUSTMENT	7,471.00			
63	7,374.00		7,374.00	5837	DOL.	ASPHALT COST PRICE ADJUSTMENT	7,374.00			
64	-1.00		-1.00	6516	DOL.	CYCLIC DENSITY PRICE ADJUSTMENT	-1.00			
						17-EROSION CONTROL AND ROADSIDE PLANTING				
65	4.00		4.00	6471	EACH	INLET PROTECTION	4.00			
66	8.00		8.00	6500	L.F.	COMPOST SOCK	8.00			
67	64.00		64.00	6502	L.F.	COIR LOG	64.00			
68	LUMP SUM		LUMP SUM	6488	L.S.	EROSION CONTROL AND WATER POLLUTION PREVENTION	L.S.			
69	471.00		471.00	6431	S.Y.	SEEDING, FERTILIZING AND MULCHING	471.00			
70	915.00		915.00	6391	S.Y.	TOPSOIL TYPE A	915.00			
71	161.00		161.00	6552	EACH	PSIPE BALDHIP ROSE NO. 1 CONT.	161.00			
72	72.00		72.00	6552	EACH	PSIPE BEAKED HAZELNUT NO. 2 CONT. 18" HT	72.00			
73	321.00		321.00	6552	EACH	PSIPE BLACK TWINBERRY NO. 1 CONT.	321.00			
74	36.00		36.00	6552	EACH	PSIPE CASCARA NO. 2 CONT. 18" HT	36.00			
75	134.00		134.00	6552	EACH	PSIPE CLUSTERED ROSE NO. 1 CONT.	134.00			
76	179.00		179.00	6552	EACH	PSIPE COASTAL STRAWBERRY NO. 1 CONT.	179.00			
77	125.00		125.00	6552	EACH	PSIPE COMMON RUSH NO. 1 CONT.	125.00			
78	357.00		357.00	6552	EACH	PSIPE CREEPING OREGON-GRAPE NO. 1 CONT.	357.00			

GROUP LEGEND

GROUP NUMBER	SR	CONTROL SECTION	TAX SCHEDULE	FUND PARTICIPANTS
1	544	374002	**	Federal
2	544	374002	**	State

			REGION	STATE	FEDERAL AID PROJECT NO.			
			10	WA	2C01006-4		Washington State Department of Transportation	SR 544 NOOKSACK RIVER OVERFLOW CULVERT ER PERMANENT REPAIR
			JOB NUMBER 26A012/1					
			CONTRACT NO					SUMMARY OF QUANTITIES
DATE	REVISION	BY						

SQ2

SHEET 4 OF 119 SHEETS

SUMMARY OF QUANTITIES

10/12/2026

ITEM NO	TOTAL QUANTITY	SUB-TOTAL * SECTION I-07.2(1) OF STANDARD SPECS	SUB-TOTAL ** SECTION I-07.2(2) OF STANDARD SPECS	STD. ITEM NO.	UNIT	ITEM	GROUP 1 SR 544 MP 7.54 TO MP 7.70	GROUP 1 BRIDGE NO. 544/9	GROUP 1 BRIDGE NO. 544/10	GROUP 2 REIMB. FOR THIRD PARTY DAMAGE
79	72.00		72.00	6552	EACH	PSIPE DOUGLAS SPIREA NO. 1 CONT.	72.00			
80	72.00		72.00	6552	EACH	PSIPE DOUGLAS-FIR NO. 2 CONT. 18" HT	72.00			
81	72.00		72.00	6552	EACH	PSIPE GRAND FIR NO. 2 CONT. 18" HT	72.00			
82	42.00		42.00	6552	EACH	PSIPE HARDSTEM BULRUSH NO. 1 CONT.	42.00			
83	536.00		536.00	6552	EACH	PSIPE KINNIKINNICK NO. 1 CONT.	536.00			
84	322.00		322.00	6552	EACH	PSIPE MOCK ORANGE NO. 1 CONT.	322.00			
85	179.00		179.00	6552	EACH	PSIPE OCEANSPRAY NO. 1 CONT.	179.00			
86	36.00		36.00	6552	EACH	PSIPE OREGON ASH NO. 2 CONT. 18" HT	36.00			
87	107.00		107.00	6552	EACH	PSIPE PACIFIC NINEBARK LIVE STAKE 3 FT	107.00			
88	107.00		107.00	6552	EACH	PSIPE RED-OSIER DOGWOOD LIVE STAKE 3 FT	107.00			
89	143.00		143.00	6552	EACH	PSIPE SALMONBERRY NO. 1 CONT.	143.00			
90	36.00		36.00	6552	EACH	PSIPE SITKA SPRUCE NO. 2 CONT. 18" HT	36.00			
91	278.00		278.00	6552	EACH	PSIPE SLOUGH SEDGE NO. 1 CONT.	278.00			
92	125.00		125.00	6552	EACH	PSIPE SMALL-FRUITED BULRUSH NO. 1 CONT.	125.00			
93	642.00		642.00	6552	EACH	PSIPE SNOWBERRY NO. 1 CONT.	642.00			
94	72.00		72.00	6552	EACH	PSIPE THIMBLEBERRY NO. 1 CONT.	72.00			
95	9.00		9.00	6551	S.Y.	PSIPE LIVE BRUSH MATTRESS	9.00			
96	36.00		36.00	6549	L.F.	PSIPE LIVE FASCINE	36.00			
97	471.00		471.00	6483	S.Y.	FINE COMPOST	471.00			
98	10,000.00		10,000.00	6546	DOL.	PROJECT AREA WEED AND PEST CONTROL	10,000.00			
99	2,746.00		2,746.00	6530	S.Y.	SOIL AMENDMENT	2,746.00			
100	3,661.00		3,661.00	6580	S.Y.	BARK OR WOOD CHIP MULCH	3,661.00			
101	266.00		266.00	6630	L.F.	HIGH VISIBILITY FENCE	266.00			
102	784.00		784.00	6635	L.F.	HIGH VISIBILITY SILT FENCE	784.00			
103	LUMP SUM		LUMP SUM	6404	L.S.	ENVIRONMENTAL COMPLIANCE LEAD	L.S.			
104	915.00		915.00	6455	S.Y.	EROSION CONTROL BLANKET	915.00			
105	LUMP SUM		LUMP SUM		L.S.	SEDIMENT FILLED COIR BAGS	L.S.			
106	3,217.00		3,217.00		S.Y.	SOIL DECOMPACTION	3,217.00			
107	1,310.00		1,310.00		L.F.	COIR WRAPPED SOIL LIFTS	1,310.00			
108	1,708.00		1,708.00		S.Y.	COMPOST SEEDING	1,708.00			
						18-TRAFFIC				
109	371.00		371.00	6700	L.F.	CEMENT CONC. TRAFFIC CURB AND GUTTER	371.00			
110	14.00		14.00	6727	L.F.	EXTRUDED CURB	14.00			
111	326.00		326.00	6788	L.F.	PRECAST CONC. BARRIER TYPE F UNANCHORED	326.00			
112	1,333.00		1,333.00	6781	L.F.	TEMPORARY BARRIER	1,333.00			
113	326.00		326.00	6784	L.F.	REMOVING AND RESETTING EXISTING PERMANENT BARRIER	326.00			
114	100.00		100.00	6830	EACH	BARRIER DELINEATOR	100.00			
115	2,389.00		2,389.00	6807	L.F.	PLASTIC LINE	2,389.00			
116	4.00		4.00	6881	EACH	PLASTIC DRAINAGE MARKING	4.00			
117	0.10		0.10	6889	HUND	RECESSED PAVEMENT MARKER	0.10			
118	LUMP SUM		LUMP SUM	6890	L.S.	PERMANENT SIGNING	L.S.			
119	2,426.00		2,426.00	6896	L.F.	TEMPORARY PAVEMENT MARKING-LONG DURATION	2,426.00			
120	884.00		884.00	6945	L.F.	CONDUIT PIPE 2 IN. DIAM.	884.00			
121	LUMP SUM		LUMP SUM	6971	L.S.	PROJECT TEMPORARY TRAFFIC CONTROL	L.S.			
122	75,000.00		75,000.00	7572	DOL.	WORK ZONE SAFETY CONTINGENCY	75,000.00			
123	LUMP SUM		LUMP SUM		L.S.	PEDESTRIAN SHUTTLE SERVICE	L.S.			
124	759.00		759.00	6982	S.F.	CONSTRUCTION SIGNS CLASS A	759.00			

GROUP LEGEND

GROUP NUMBER	SR	CONTROL SECTION	TAX SCHEDULE	FUND PARTICIPANTS
1	544	374002	**	Federal
2	544	374002	**	State

			REGION	STATE	FEDERAL AID PROJECT NO.		Washington State Department of Transportation	SR 544 NOOKSACK RIVER OVERFLOW CULVERT ER PERMANENT REPAIR	SQ3
			10	WA	2C01006-4				SHEET 5 OF 119 SHEETS
			JOB NUMBER 26A012/1						
			CONTRACT NO					SUMMARY OF QUANTITIES	
DATE	REVISION	BY							

SUMMARY OF QUANTITIES

10/12/2026

ITEM NO	TOTAL QUANTITY	SUB-TOTAL * SECTION I-07.2(1) OF STANDARD SPECS	SUB-TOTAL ** SECTION I-07.2(2) OF STANDARD SPECS	STD. ITEM NO.	UNIT	ITEM	GROUP 1 SR 544 MP 7.54 TO MP 7.70	GROUP 1 BRIDGE NO. 544/9	GROUP 1 BRIDGE NO. 544/10	GROUP 2 REIMB. FOR THIRD PARTY DAMAGE
						19-OTHER ITEMS				
125	1,000.00		1,000.00	9004	DOL.	PROJECT PARTNERING	1,000.00			
126	LUMP SUM		LUMP SUM	7003	L.S.	TYPE B PROGRESS SCHEDULE	L.S.			
127	LUMP SUM		LUMP SUM	7037	L.S.	STRUCTURE SURVEYING	L.S.			
128	LUMP SUM		LUMP SUM	7038	L.S.	ROADWAY SURVEYING	L.S.			
129	2.00		2.00	7380	EACH	ADJUST MONUMENT CASE AND COVER	2.00			
130	421.00		421.00	7055	S.Y.	CEMENT CONC. SIDEWALK	421.00			
131	45.00		45.00	7088	L.F.	COATED CHAIN LINK FENCE TYPE 4	45.00			
132	1.00		1.00	7101	EACH	SINGLE 6 FT. COATED CHAIN LINK GATE	1.00			
133	170.00		170.00	7164	S.F.	GRAVITY BLOCK WALL	170.00			
134	LUMP SUM		LUMP SUM	7350	L.S.	CLEANING EXISTING DRAINAGE STRUCTURE	L.S.			
135	20,000.00		20,000.00	7715	DOL.	FORCE ACCOUNT PAVEMENT SEAT REPAIR BR. NO. 544/10			20,000.00	
136	47,695.20		47,695.20	7715	DOL.	FORCE ACCOUNT ROADSIDE RESTORATION	47,695.20			
137	20,000.00		20,000.00	7715	DOL.	FORCE ACCOUNT SHEET PILE PRE-DRILLING	20,000.00			
138	10,000.00		10,000.00	7480	DOL.	ROADSIDE CLEANUP	10,000.00			
139	5.00		5.00	7725	DOL.	REIMBURSEMENT FOR THIRD PARTY DAMAGE				5.00
140	1.00		1.00	7726	DOL.	DISPUTES REVIEW BOARD	1.00			
141	12,600.00		12,600.00	7730	DOL.	FUEL COST ADJUSTMENT	12,600.00			
142	3,000.00		3,000.00	7731	DOL.	STEEL COST ADJUSTMENT	3,000.00			
143	-1.00		-1.00	7732	DOL.	AGGREGATE COMPLIANCE PRICE ADJUSTMENT	-1.00			
144	LUMP SUM		LUMP SUM	7736	L.S.	SPCC PLAN	L.S.			
145	30.00		30.00	7554	S.Y.	CONSTRUCTION GEOTEXTILE FOR PERMANENT EROSION CONTROL	30.00			

GROUP LEGEND

GROUP NUMBER	SR	CONTROL SECTION	TAX SCHEDULE	FUND PARTICIPANTS
1	544	374002	**	Federal
2	544	374002	**	State

			REGION	STATE	FEDERAL AID PROJECT NO.			
			10	**WA**	2C01006-4		Washington State Department of Transportation	SR 544 NOOKSACK RIVER OVERFLOW CULVERT ER PERMANENT REPAIR
			JOB NUMBER **26A012/1**					
			CONTRACT NO					SUMMARY OF QUANTITIES
DATE	REVISION	BY						

SQ4

SHEET 6 OF 119 SHEETS