Contract Provisions

For Construction of:

SR 544 MP 7.54 TO MP 7.70

NOOKSACK RIVER OVERFLOW CULVERT ER PERMANENT REPAIR

WHATCOM COUNTY

VOLUME 2 OF 2

F.A.PROJECT NO. 2C01006-4

Washington State
Department of Transportation

APPENDIX D

NPDES Construction Stormwater General Permit

STATE OF WASHINGTON

DEPARTMENT OF ECOLOGY

PO Box 47600, Olympia, WA 98504-7600 • 360-407-6000

September 1, 2026

Spencer Beier
WSDOT
1109 E Hickox Rd
Mount Vernon, WA 98274
Sent by email only: spencer.beier@wsdot.wa.gov

RE: Coverage under the Construction Stormwater General Permit

Permit number:	**WAR316073**
Site Name:	**SR 544 Nooksack Overflow Permanent Emergency Repair**
Location:	**State Route 544 between milepost 7.54 to 7.70**
	Everson, WA County: Whatcom
Disturbed Acres:	**1.9**

Dear Spencer Beier:

The Washington State Department of Ecology (Ecology) received your Notice of Intent for coverage under Ecology's Construction Stormwater General Permit (CSWGP). This is your permit coverage letter. Your permit coverage is effective September 1, 2026.

Retain this letter as an official record of permit coverage for your site. You may keep your records in electronic format if you can easily access them from your construction site. You can get the CSWGP, permit forms, and other information at Ecology's CSWGP eCoverage Packet webpage[1]. Contact your Permit Administrator, listed below, if you want a copy of the CSWGP mailed to you. Please read the permit and contact Ecology if you have any questions.

Electronic Discharge Monitoring Reports (WQWebDMR)
This permit requires you to submit monthly discharge monitoring reports (DMRs) for the full duration of permit coverage (from the first full month of coverage to termination). Your first sampling and reporting period will be for the month of **September** and your first DMR must be submitted by **October 15, 2026**.

[1] http://www.ecology.wa.gov/eCoverage-packet

You must submit your DMRs electronically using Ecology's secure online system, WQWebDMR. To sign up for WQWebDMR go to Ecology's WQWebPortal guidance webpage[2]. If you have questions, contact the portal staff at (360) 407-7097 (Olympia area), or (800) 633-6193/Option 3, or email WQWebPortal@ecy.wa.gov.

Appeal Process

You have a right to appeal coverage under the general permit to the Pollution Control Hearing Board (PCHB). Appeals must be filed within 30 days of the date of receipt of this letter. Any appeal is limited to the general permit's applicability or non-applicability to a specific discharger. The appeal process is governed by chapter 43.21B RCW and chapter 371-08 WAC. "Date of receipt" is defined in RCW 43.21B.001(2). For more information regarding your right to appeal, please reference Ecology's Focus Sheet: *Appeal of General Permit Coverage*[3].

Annual Permit Fees

RCW 90.48.465 requires Ecology to recover the costs of managing the permit program. Permit fees are invoiced annually until the permit is terminated. Termination conditions are described in the permit. For permit fee related questions, please contact the Water Quality Fee Unit at wqfeeunit@ecy.wa.gov or (800) 633-6193/Option 2. You can also visit Water Quality Permit Fees Webpage[4] for more information.

Ecology Field Inspector Assistance

If you have questions regarding stormwater management at your construction site, please contact your Regional Inspector, Jen Baptist of Ecology's Bellingham Field Office at jen.baptist@ecy.wa.gov, or (564) 565-0327.

Questions or Additional Information

Ecology is here to help. Please review our Construction Stormwater General Permit webpage[5] for more information. If you have questions about the Construction Stormwater General Permit, please contact your Permit Administrator, Melinda Wilson at melinda.wilson@ecy.wa.gov, or (360) 870-8290.

Sincerely,



Jeff Killelea, Manager
Permit and Technical Services Section
Water Quality Program

[2] https://ecology.wa.gov/Regulations-Permits/Guidance-technical-assistance/Water-quality-permits-guidance/WQWebPortal-guidance
[3] https://apps.ecology.wa.gov/publications/summarypages/1710007.html
[4] https://ecology.wa.gov/Water-Shorelines/Water-quality/Water-quality-permits/Fees
[5] www.ecology.wa.gov/constructionstormwaterpermit

Errata

For the Construction Stormwater General Permit Issued on November 19, 2025 and effective on January 1, 2026

February 5, 2026

Numbering

Ecology has corrected two areas in S4.B where numbering was out of order, or numbers were duplicated due to formatting.

For example, S4.B contained S4.B.1&2 twice:

S4.B Original inaccurate numbering: S4.B.1,2,1,2

S4.B Corrected numbering: S4.B.1,2,3,4

Definition

Ecology has changed the definition of Groundwater Discharge Point from "industrial" to "construction" for clarification

Groundwater Discharge Point (or Discharge to Groundwater) means the location where stormwater associated with construction activities enters a stormwater infiltration structure that is used, intended or designed to infiltrate water into the ground

Removed "Draft"

Ecology removed the word "Draft" in the footer.

ADA Statement

The Department of Ecology is committed to providing people with disabilities access to information and services by meeting or exceeding the requirements of the Americans with Disabilities Act (ADA), Section 504 and 508 of the Rehabilitation Act, and Washington State Policy #188.

To request ADA Accommodation, contact Water Quality Reception at 360-407-6600. For Washington Relay Service or TTY call 711 or 877-833-6341. Visit Ecology's ADA Accessibility web page[1] for more information.

For document translation services, call Water Quality Reception at 360-407-6600.

Para publicaciones en español, por favor llame a la Recepción de Calidad del Agua al 360-407-6600.

[1] https://ecology.wa.gov/About-us/Accessibility-equity/Accessibility

Issuance Date:	November 19, 2025
Effective Date:	January 1, 2026
Expiration Date:	December 31, 2030

CONSTRUCTION STORMWATER GENERAL PERMIT

National Pollutant Discharge Elimination System and
State Waste Discharge General Permit

State of Washington
Department of Ecology
Olympia, Washington 98504

In compliance with the provisions of
Chapter 90.48 Revised Code of Washington
(State of Washington Water Pollution Control Act)

and

Title 33 United States Code, Section 1251 et seq.
The Federal Water Pollution Control Act (The Clean Water Act)

Until this Permit expires, is modified, or is revoked, Permittees that have properly obtained coverage under this Permit are authorized to discharge in accordance with the special and general conditions that follow.



Jon Kenning, PhD
Water Quality Program Manager
Washington State Department of Ecology

This page intentionally left blank.

ADA STATEMENT

The Department of Ecology is committed to providing people with disabilities access to information and services by meeting or exceeding the requirements of the Americans with Disabilities Act (ADA), Section 504 and 508 of the Rehabilitation Act, and Washington State Policy #188.

To request ADA Accommodation, contact Water Quality Reception at 360-407-6600. For Washington Relay Service or TTY call 711 or 877-833-6341. Visit Ecology's ADA Accessibility web page[1] for more information.

For document translation services, call Water Quality Reception at 360-407-6600.

Para publicaciones en español, por favor llame a la Recepción de Calidad del Agua al 360-407-6600.

[1] https://ecology.wa.gov/About-us/Accessibility-equity/Accessibility

TABLE OF CONTENTS

SUMMARY OF PERMIT REPORT SUBMITTALS 1

SPECIAL CONDITIONS 3

S1. PERMIT COVERAGE 3

A. Permit Area 3

B. Operators Required to Seek Coverage Under this General Permit 3

C. Authorized Discharges 4

D. Prohibited Discharges 5

E. Limits on Coverage 5

F. Erosivity Waiver 6

S2. APPLICATION REQUIREMENTS 8

A. Permit Application Forms 8

B. Public Notice 10

S3. COMPLIANCE WITH STANDARDS 11

A. Prior to the discharge of stormwater and non-stormwater to waters of the State, the Permittee must apply All Known, Available, and Reasonable methods of prevention, control, and Treatment (AKART). This includes the preparation and implementation of an adequate SWPPP, with all appropriate BMPs installed and maintained in accordance with the SWPPP and the terms and conditions of this permit. 11

B. Ecology presumes that water quality standards are protected in the receiving water when the Permittee complies with the following conditions, unless discharge monitoring data or other site-specific information demonstrates that a discharge causes or contributes to a violation of water quality standards. The Permittee must fully: 11

C. Where construction sites also discharge to groundwater, the groundwater discharges must also meet the terms and conditions of this CSWGP. Permittees who discharge to groundwater through an injection well must also comply with any applicable requirements of the Underground Injection Control (UIC) regulations, Chapter 173-218 WAC. 11

S4. MONITORING REQUIREMENTS, BENCHMARKS, AND REPORTING TRIGGERS 12

A. Site Logbook 12

B. Site Inspections 12

C. Turbidity/Transparency Sampling Requirements 14

D. pH Sampling Requirements – Significant Concrete Work or Engineered Soils 18

S5. REPORTING AND RECORDKEEPING REQUIREMENTS 20

A. High Turbidity Reporting 20
B. Discharge Monitoring Reports (DMRs) 20
C. Records Retention 21
D. Recording Results 21
E. Additional Monitoring by the Permittee 21
F. Noncompliance Notification 21
G. Access to Plans and Records 22
S6. PERMIT FEES 23
S7. SOLID AND LIQUID WASTE DISPOSAL 23
S8. DISCHARGES TO 303(d) OR TMDL WATERBODIES 24
A. Sampling and Numeric Effluent Limits for Certain Discharges to 303(d)-Listed Water Bodies 24
B. Limits on Coverage for New Discharges to TMDL or 303(d)-Listed Waters 24
C. Sampling and Numeric Effluent Limits for Discharges to Water Bodies on the 303(d) List for Turbidity, Fine Sediment, Low Dissolved Oxygen or Phosphorus 25
D. Discharges to Water Bodies on the 303(d) List for High pH 26
E. Sampling and Limits for Sites Discharging to Waters Covered by a TMDL or another Pollution Control Plan 27
S9. STORMWATER POLLUTION PREVENTION PLAN 29
A. The Permittee's SWPPP must meet the following objectives: 29
B. General Requirements 29
C. Stormwater Best Management Practices (BMPs) 30
D. SWPPP – Narrative Contents and Requirements 30
E. SWPPP – Map Contents and Requirements 38
S10. NOTICE OF TERMINATION (NOT) 40
A. Conditions for an NOT 40
B. Process for Terminating 40
GENERAL CONDITIONS 42
G1. DISCHARGE VIOLATIONS 42
G2. SIGNATORY REQUIREMENTS 42
A. All permit applications (including NOIs, NOTs, and Transfer of Coverage forms) signed and certified: 42

B. All reports required by this permit and other information requested by Ecology must be signed by a person described above or by a duly authorized representative of that person. A person is a duly authorized representative only if: 42

C. Changes to authorization. If an authorization under paragraph G2.B.2 above is no longer accurate because a different individual or position has responsibility for the overall operation of the facility, a new authorization satisfying the requirements of paragraph G2.B.2 above must be submitted to Ecology prior to or together with any reports, information, or applications to be signed by an authorized representative. 42

D. Certification. Any person signing a document under this section must make the following certification:..... 43

G3. RIGHT OF INSPECTION AND ENTRY..... 43

G4. GENERAL PERMIT MODIFICATION AND REVOCATION 43

G5. REVOCATION OF COVERAGE UNDER THE PERMIT 44

G6. REPORTING A CAUSE FOR MODIFICATION 44

G7. COMPLIANCE WITH OTHER LAWS AND STATUTES..... 44

G8. DUTY TO REAPPLY 45

G9. REMOVED SUBSTANCE 45

G10. DUTY TO PROVIDE INFORMATION..... 45

G11. OTHER REQUIREMENTS OF 40 CFR..... 45

G12. ADDITIONAL MONITORING..... 45

G13. PENALTIES FOR VIOLATING PERMIT CONDITIONS 45

G14. UPSET 46

G15. PROPERTY RIGHTS..... 46

G16. DUTY TO COMPLY 46

G17. TOXIC POLLUTANTS..... 46

G18. PENALTIES FOR TAMPERING..... 47

G19. REPORTING PLANNED CHANGES 47

A. The permitted facility being determined to be a new source pursuant to 40 CFR 122.29(b)..... 47

B. A significant change in the nature or an increase in quantity of pollutants discharged, including but not limited to: a 20% or greater increase in acreage disturbed by construction activity. 47

C. A change in or addition of surface water(s) receiving stormwater or non-stormwater from the construction activity. 47

D. A change in the construction plans and/or activity that affects the Permittee's monitoring requirements in Special Condition S4. 47
G20. REPORTING OTHER INFORMATION 47
G21. REPORTING ANTICIPATED NON-COMPLIANCE 47
G22. REQUESTS TO BE EXCLUDED FROM COVERAGE UNDER THE PERMIT 48
G23. APPEALS 48
A. The terms and conditions of this general permit, as they apply to the appropriate class of dischargers, are subject to appeal by any person within 30 days of issuance of this general permit, in accordance with Chapter 43.21B RCW, and Chapter 173-226 WAC. 48
B. The terms and conditions of this general permit, as they apply to an individual discharger, are appealable in accordance with Chapter 43.21B RCW within 30 days of the effective date of coverage of that discharger. Consideration of an appeal of general permit coverage of an individual discharger is limited to the general permit's applicability or non-applicability to that individual discharger. 48
C. The appeal of general permit coverage of an individual discharger does not affect any other dischargers covered under this general permit. If the terms and conditions of this general permit are found to be inapplicable to any individual discharger(s), the matter shall be remanded to Ecology for consideration of issuance of an individual permit or permits. 48
G24. SEVERABILITY 48
G25. BYPASS PROHIBITED 48
A. Bypass Procedures 48
B. Duty to Mitigate 50
APPENDIX A – DEFINITIONS 51
APPENDIX B – ACRONYMS 60

SUMMARY OF PERMIT REPORT SUBMITTALS

Refer to the Special and General Conditions within this permit for additional submittal requirements. Appendix A provides a list of definitions. Appendix B provides a list of acronyms.

Table 1: Summary of Required Submittals

Permit Section	Submittal	Frequency	First Submittal Date
S5.A and S8	High Turbidity/Transparency Phone Reporting	As Necessary	Within 24 hours
S5.B	Discharge Monitoring Report	Monthly*	Within 15 days following the end of each month
S5.F and S8	Noncompliance Notification – Telephone Notification	As necessary	Within 24 hours
S5.F	Noncompliance Notification – Written Report	As necessary	Within 5 Days of non-compliance
S9.D	Request for Chemical Treatment Form	As necessary	Written authorization from Ecology is required prior to using chemical treatment (with the exception of dry ice, CO_2 or food grade vinegar to adjust pH)
G2	Notice of Change in Authorization	As necessary	
G6	Permit Application for Substantive Changes to the Discharge	As necessary	
G8	Application for Permit Renewal	1/permit cycle	No later than 180 days before expiration
S2.A	Notice of Permit Transfer	As necessary	
G19	Notice of Planned Changes	As necessary	

Permit Section	Submittal	Frequency	First Submittal Date
G21	Reporting Anticipated Non-compliance	As necessary	

NOTE: *Permittees must submit electronic Discharge Monitoring Reports (DMRs) to the Washington State Department of Ecology monthly, regardless of site discharge, for the full duration of permit coverage. Refer to Condition S5.B of this General Permit for more specific information regarding DMRs.

Table 2: Summary of Required On-site Documentation

Document Title	Permit Conditions
Permit Coverage Letter	See Conditions S2, S5
Construction Stormwater General Permit (CSWGP)	See Conditions S2, S5
Site Logbook	See Conditions S4, S5
Stormwater Pollution Prevention Plan (SWPPP)	See Conditions S5, S9
Site Map	See Conditions S5, S9

SPECIAL CONDITIONS

S1. PERMIT COVERAGE

A. Permit Area

This Construction Stormwater General Permit (CSWGP) covers all areas of Washington State, except for federal operators and Indian Country as specified in Special Condition S1.E.3 and 4.

B. Operators Required to Seek Coverage Under this General Permit

1. Operators of the following construction activities are required to seek coverage under this CSWGP:

    a. Clearing, grading, excavation, construction support activity and other soil disturbing activity (S1.B.1.a.i.) that results in the disturbance of one or more acres (including off-site disturbance acreage related to construction-support activity as authorized in S1.C.2) and discharges stormwater to surface waters of the State; and clearing, grading and/or excavation on sites smaller than one acre that are part of a larger common plan of development or sale, if the common plan of development or sale will ultimately disturb one acre or more and discharge stormwater to surface waters of the State.

        i. For the purposes of determining which sites require permit coverage under the CSWGP include:

        - Forest practices (including, but not limited to, class IV conversions) that are part of a construction activity that will result in the disturbance of one or more acres, and discharge to surface waters of the State (that is, forest practices that prepare a site for construction activities); and
        - Construction support activities including equipment staging, borrow pit, material storage areas, dump areas, haul roads, construction roads, side-cast areas, on-site portable rock crusher, staging yards, parking areas, off-site construction support activities and other soil disturbing activities.

    b. Any size construction activity discharging stormwater to waters of the State that the Washington State Department of Ecology (Ecology):

        i. Determines to be a significant contributor of pollutants to waters of the State of Washington.

        ii. Reasonably expects to cause a violation of any water quality standard.

2. Operators of the following activities are not required to seek coverage under this CSWGP (unless specifically required under Special Condition S1.B.1.b, above):

a. Construction activities that discharge all stormwater and non-stormwater to groundwater, sanitary sewer, or combined sewer, and have no point source discharge to either surface water or a storm sewer system that drains to surface waters of the State.

b. Construction activities covered under an Erosivity Waiver (Special Condition S1.F).

c. Routine maintenance that is performed to maintain the original line and grade, hydraulic capacity, or original purpose of a facility.

C. Authorized Discharges

1. Stormwater Associated with Construction Activity
   Subject to compliance with the terms and conditions of this permit, Permittees are authorized to discharge stormwater associated with construction activity to surface waters of the State or to a storm sewer system that drains to surface waters of the State. (Note that "surface waters of the State" may exist on a construction site as well as off-site; for example, a creek running through a site.)

2. Stormwater Associated with Construction Support Activity
   This permit also authorizes stormwater discharge from support activities related to the permitted construction site provided:

   a. The support activity relates directly to the permitted construction site that is required to have an NPDES permit; and

   b. The support activity is not a commercial operation serving multiple unrelated construction projects, and does not operate beyond the completion of the construction activity; and

   c. Appropriate controls and measures are identified in the Stormwater Pollution Prevention Plan (SWPPP) for the discharges from the support activity areas.

3. Non-Stormwater Discharges
   The categories and sources of non-stormwater discharges identified below are authorized conditionally, provided the discharge is consistent with the terms and conditions of this permit:

   a. Discharges from fire-fighting activities

   b. Fire hydrant system flushing

   c. Potable water, including uncontaminated water line flushing

   d. Hydrostatic test water

   e. Uncontaminated air conditioning or compressor condensate

   f. Uncontaminated groundwater or spring water

   g. Uncontaminated excavation dewatering water (in accordance with S9.D.10)

h. Uncontaminated discharges from foundation or footing drains

i. Uncontaminated or potable water used to control dust. Permittees must minimize the amount of dust control water used

j. Routine external building wash down that does not use detergents

k. Landscape irrigation water

The SWPPP must adequately address all authorized non-stormwater discharges, except for discharges from fire-fighting activities, and must comply with Special Condition S3. At a minimum, discharges from potable water (including water line flushing), fire hydrant system flushing, and pipeline hydrostatic test water must undergo the following: dichlorination to a concentration of 0.1 parts per million (ppm) or less, and pH adjustment to within 6.5 – 8.5 standard units (su), if necessary.

D. Prohibited Discharges

The following discharges to waters of the State, including groundwater, are prohibited:

1. Concrete wastewater
2. Wastewater from washout and clean-up of stucco, paint, form release oils, curing compounds and other construction materials
3. Process wastewater as defined by 40 Code of Federal Regulations (CFR) 122.2 (See Appendix A of this permit)
4. Slurry materials and waste from shaft drilling, including process wastewater from shaft drilling for construction of building, road, and bridge foundations unless managed according to Special Condition S9.D.9.j
5. Fuels, oils, or other pollutants used in vehicle and equipment operation and maintenance
6. Soaps or solvents used in vehicle and equipment washing
7. Wheel wash wastewater, unless it goes to a closed loop recirculation system or upland application, as stated in Special Condition S9.D.9
8. Discharges from dewatering activities, including discharges from dewatering of trenches and excavations, unless managed according to Special Condition S9.D.10

E. Limits on Coverage

Ecology may require any discharger to apply for and obtain coverage under an individual permit or another more specific general permit. Such alternative coverage required when Ecology determines that this CSWGP does not adequately assure water quality protection, or there is a reasonable potential for the project to cause or contribute to a violation of water quality standards.

The following stormwater discharges are not covered by this permit:

1. Post-construction stormwater discharges that originate from the site after completion of construction activities and the site has undergone final stabilization
2. Non-point source silvicultural activities such as nursery operations, site preparation, reforestation and subsequent cultural treatment, thinning, prescribed burning, pest and fire control, harvesting operations, surface drainage, or road construction and maintenance, from which there is natural runoff as excluded in 40 CFR Subpart 122
3. Stormwater from any federal operator and Lands of Exclusive Federal Jurisdiction.
4. Stormwater from facilities located on Indian Country as defined in 18 U.S.C.§1151, except portions of the Puyallup Reservation as noted below.

   Indian Country includes:

   a. All land within any Indian Reservation notwithstanding the issuance of any patent, and, including rights-of-way running through the reservation. This includes all federal, tribal, and Indian and non-Indian privately owned land within the reservation.

   b. All off-reservation Indian allotments, the Indian titles to which have not been extinguished, including rights-of-way running through the same.

   c. All off-reservation federal trust lands held for Native American Tribes. Puyallup Exception: Following the Puyallup Tribes of Indians Land Settlement Act of 1989, 25 U.S.C. §1773; the permit does apply to land within the Puyallup Reservation except for discharges to surface water on land held in trust by the federal government.

5. Stormwater from any site covered under an existing NPDES individual permit in which stormwater management and/or treatment requirements are included for all stormwater discharges associated with construction activity.
6. Stormwater from a site where an applicable Total Maximum Daily Load (TMDL) requirement specifically precludes or prohibits discharges from construction activity.

F. Erosivity Waiver

Construction site operators may qualify for an Erosivity Waiver from the CSWGP if the following conditions are met:

1. The site will result in the disturbance of fewer than five (5) acres and the site is not a portion of a common plan of development or sale that will disturb five (5) acres or greater.
2. Calculation of Erosivity "R" Factor and Regional Timeframe:

   a. The project's calculated rainfall erosivity factor ("R" Factor) must be less than five (5) during the period of construction activity, (See the CSWGP homepage[2]

[2] https://ecology.wa.gov/regulations-permits/permits-certifications/stormwater-general-permits/construction-stormwater-permit

for a link to the EPA's calculator and step by step instructions on computing the "R" Factor in the EPA Erosivity Waiver Fact Sheet). The period of construction activity starts when the land is first disturbed and ends with final stabilization. In addition:

b. The entire period of construction activity must fall within the following timeframes:

   i. For sites west of the Cascades Crest: June 15 – September 15.

   ii. For sites east of the Cascades Crest, excluding the Central Basin: June 15 – October 15.

   iii. For sites east of the Cascades Crest, within the Central Basin: no timeframe restrictions apply. The Central Basin is defined as the portions of Eastern Washington with mean annual precipitation of less than 12 inches. For a map of the Central Basin (Average Annual Precipitation Region 2), refer to CSWGP home[3].

3. Construction site operators seeking the waiver must submit a complete Erosivity Waiver certification form at least one week before disturbing the land via Ecology's Water Quality Permitting Portal or the Erosivity Waiver Certification form found on the CSWGP homepage. Certification must include statements that the operator will:

   a. Comply with applicable local stormwater requirements; and

   b. Implement appropriate erosion and sediment control BMPs to prevent violations of water quality standards.

4. This waiver is not available for facilities declared significant contributors of pollutants as defined in Special Condition S1.B.1.b or for any size construction activity that could reasonably expect to cause a violation of any water quality standard as defined in Special Condition S1.B.1.b.ii.

5. This waiver does not apply to construction activities which include non-stormwater discharges listed in Special Condition S1.C.3.

6. If construction activity extends beyond the certified waiver period for any reason, the operator must either:

   a. Recalculate the rainfall erosivity "R" factor using the original start date and a new projected ending date and, if the "R" factor is still under 5 and the entire project falls within the applicable regional timeframe in Special Condition S1.F.2.b, complete and submit an amended waiver certification form before the original waiver expires; or

   b. Submit a complete permit application to Ecology in accordance with Special Condition S2.A and B before the end of the certified waiver period.

[3] https://ecology.wa.gov/regulations-permits/permits-certifications/stormwater-general-permits/construction-stormwater-permit

S2. APPLICATION REQUIREMENTS

A. Permit Application Forms

7. Notice of Intent Form

a. Operators of new or previously unpermitted construction activities must submit a complete and accurate permit application (Notice of Intent, or NOI) to Ecology.

b. Operators must apply using the electronic application form (NOI) available on CSWGP homepage[4]. Permittees unable to submit electronically (for example, those who do not have an internet connection) must contact Ecology to request a waiver and obtain instructions on how to obtain a paper NOI.

Department of Ecology
Water Quality Program - Construction Stormwater
PO Box 47696
Olympia, Washington 98504-7696

c. The operator must submit the NOI at least 60 days before discharging stormwater from construction activities and must submit it prior to the date of the first public notice (See Special Condition S2.B, below, for details). The 30-day public comment period begins on the publication date of the second public notice. Unless Ecology responds to the complete application in writing, coverage under the general permit will automatically commence on the 31st day following receipt by Ecology of a completed NOI, or the issuance date of this permit, whichever is later; unless Ecology specifies a later date in writing as required by WAC173-226-200(2). See S8.B for Limits on Coverage for New Discharges to TMDL or 303(d)-Listed Waters.

d. If an applicant intends to use a Best Management Practice (BMP) selected on the basis of Special Condition S9.C.4 ("demonstrably equivalent" BMPs), the applicant must notify Ecology of its selection as part of the NOI. In the event the applicant selects BMPs after submission of the NOI, the applicant must provide notice of the selection of an equivalent BMP to Ecology at least 60 days before intended use of the equivalent BMP.

e. Applicants must notify Ecology if they are aware of contaminated soils and/or contaminated groundwater associated with the construction activity. Contamination includes sites with known, remediated, or historically contaminated groundwater and /or soil. Provide detailed information with the NOI (as known and readily available) on the nature and extent of the contamination (concentrations, locations, and depth), as well as pollution prevention and/or treatment BMPs proposed to control the discharge of soil

[4] https://ecology.wa.gov/regulations-permits/permits-certifications/stormwater-general-permits/construction-stormwater-permit

and/or groundwater contaminants in stormwater. Examples of such information may include, but are not limited to:

i. List or table of all known contaminants with laboratory test results showing concentration and depth,

ii. Map with sample locations,

iii. Related portions of the Stormwater Pollution Prevention Plan (SWPPP) that address the management of contaminated and potentially contaminated construction stormwater and dewatering water.

iv. A brief project overview,

v. Dewatering plan and/or dewatering contingency plan.

8. Transfer of Coverage Form

The Permittee can transfer current coverage under this permit to one or more new operators, including operators of sites within a Common Plan of Development, provided:

a. The Permittee submits a complete Transfer of Coverage Form to Ecology, signed by the current and new discharger and containing a specific date for transfer of permit responsibility, coverage and liability (including any Administrative Orders associated with the permit); and

b. Ecology does not notify the current discharger and new discharger of intent to revoke coverage under the general permit. If this notice is not given, the transfer is effective on the date specified in the written agreement.

When a current discharger (Permittee) transfers a portion of a permitted site, the current discharger must also indicate the remaining permitted acreage after the transfer. Permittees completing partial transfers must include an updated site map. Transfers do not require public notice.

9. Modification of Coverage Form

Permittees must notify Ecology of any changes to the information provided on the NOI by submitting a Modification of Permit Coverage form in accordance with General Conditions G6 and G19. Permittees updating their permitted acreage must include an updated site map.

Examples of changes that require a Permittee to submit a modification of Coverage form to Ecology include, but are not limited to:

a. Changes to the Permittee's mailing address,

b. Changes to the on-site contact person information, and

c. Changes to the area/acreage affected by construction activity.

B. Public Notice

For new or previously unpermitted construction activities, the applicant must publish a public notice at least one time each week for two consecutive weeks, at least 7 days apart, in a newspaper with general circulation in the county where the construction is to take place. The notice must be run after the NOI has been submitted and must contain:

1. A statement that "The applicant is seeking coverage under the Washington State Department of Ecology's Construction Stormwater NPDES and State Waste Discharge General Permit."
2. The name, address, and location of the construction site.
3. The name and address of the applicant.
4. The type of construction activity that will result in a discharge (for example, residential construction, commercial construction, etc.), and the total number of acres disturbed over the lifetime of the project.
5. The name of the receiving water(s) (that is, the surface water(s) to which the site will discharge), or, if the discharge is through a storm sewer system, the name of the operator of the system and the receiving water(s) the system discharges to.

   The statement: *Any persons desiring to present their views on this construction project to the Washington State Department of Ecology regarding this application, or interested in Ecology's action on this application, may notify Ecology in writing no later than 30 days of the last date of publication of this notice. Ecology reviews public comments and considers whether discharges from this construction project would cause a measurable change in receiving water quality, and, if so, whether the project is necessary and in the overriding public interest according to Tier II antidegradation requirements under WAC 173-201A-320. Comments can be submitted to: Department of Ecology, PO Box 47696, Olympia, Washington 98504 7696 Attn: Water Quality Program, Construction Stormwater. Questions or concerns regarding post-construction stormwater impacts should be directed to the local jurisdiction.*

S3. COMPLIANCE WITH STANDARDS

A. Prior to the discharge of stormwater and non-stormwater to waters of the State, the Permittee must apply All Known, Available, and Reasonable methods of prevention, control, and Treatment (AKART). This includes the preparation and implementation of an adequate SWPPP, with all appropriate BMPs installed and maintained in accordance with the SWPPP and the terms and conditions of this permit.

B. Ecology presumes that water quality standards are protected in the receiving water when the Permittee complies with the following conditions, unless discharge monitoring data or other site-specific information demonstrates that a discharge causes or contributes to a violation of water quality standards. The Permittee must fully:

1. Comply with all permit conditions, including planning, sampling, monitoring, reporting, and recordkeeping conditions.

2. Implement stormwater BMPs contained in stormwater management manuals published or approved by Ecology, or BMPs that are demonstrably equivalent to BMPs contained in stormwater management manuals published or approved by Ecology, including the proper selection, implementation, and maintenance of all applicable and appropriate BMPs for on-site pollution control. (For purposes of this section, the stormwater manuals listed in Appendix 10 of the Phase I Municipal Stormwater Permit are approved by Ecology.)

C. Where construction sites also discharge to groundwater, the groundwater discharges must also meet the terms and conditions of this CSWGP. Permittees who discharge to groundwater through an injection well must also comply with any applicable requirements of the Underground Injection Control (UIC) regulations, Chapter 173-218 WAC.

S4. MONITORING REQUIREMENTS, BENCHMARKS, AND REPORTING TRIGGERS

A. Site Logbook

The Permittee must maintain a site logbook that contains a record of the implementation of the SWPPP and other permit requirements, including the installation and maintenance of BMPs, site inspections, and stormwater monitoring.

B. Site Inspections

All Permittees must have site inspections conducted by a Certified Erosion and Sediment Control Lead (CESCL). (See Special Conditions S4.B.3 and B.4, below, for detailed requirements of the Permittee's CESCL.)

Site inspections must include all areas disturbed by construction activities, all BMPs, and all stormwater discharge points under the Permittee's operational control.

1. The Permittee must have staff knowledgeable in the principles and practices of erosion and sediment control. The CESCL must have the skills to assess the:

    a. Site conditions and construction activities that could impact the quality of stormwater; and

    b. Effectiveness of erosion and sediment control measures used to control the quality of stormwater discharges. The SWPPP must identify the CESCL, who must be present on site, or on-call at all times. The CESCL must obtain this certification through an approved erosion and sediment control training program that meets the minimum training standards established by Ecology. (See BMP C160 in the manual, referred to in Special Condition S9.C.1 and 2.)

2. The CESCL must examine stormwater visually at all stormwater discharge points for the presence of suspended sediment, turbidity, discoloration, and oil sheen. The CESCL shall also examine the discharge point for indications of stormwater discharge(s), erosion, sedimentation, or BMP failure or maintenance needs. The CESCL must evaluate BMP effectiveness to determine if it is necessary to install, maintain, or repair BMPs to improve the quality of stormwater discharges.

    Based on the results of the inspection, the Permittee must correct the problems identified, by:

    a. Reviewing the SWPPP for compliance with Special Condition S9 and making appropriate revisions within 7 days of the inspection.

    b. Immediately beginning the process of fully implementing and maintaining appropriate source control and/or treatment BMPs, within 10 days of the inspection. If installation of necessary treatment BMPs is not feasible within 10 days, Ecology may approve additional time when an extension is requested by a Permittee within the initial 10-day response period.

    c. Documenting BMP implementation and maintenance in the site logbook.

3. The CESCL must inspect all areas disturbed by construction activities, all BMPs, and all stormwater discharge points at least once every calendar week and within 24 hours of any discharge from the site. (For purposes of this condition, individual discharge events that last more than one (1) day do not require daily inspections. For example, if a stormwater pond discharges continuously over the course of a week, only one (1) inspection is required that week.) Inspection frequency may be reduced to once every calendar month for inactive sites that are temporarily stabilized.

4. The Permittee must summarize the results of each inspection in an inspection report or checklist and maintain that with the site logbook. Inspection reports/checklists must also be attached. At a minimum, each inspection report or checklist must include:

    a. Inspection date and time.

    b. Weather information.

    c. The general conditions during inspection.

    d. The approximate amount of precipitation since the last inspection.

    e. The approximate amount of precipitation within the last 24 hours.

    f. A summary or list of all implemented BMPs, including observations of all erosion/sediment control structures or practices.

    g. A description of:

        i. BMPs inspected (including location).

        ii. BMPs that need maintenance and why.

        iii. BMPs that failed to operate as designed or intended, and

        iv. Where additional or different BMPs are needed, and why.

    h. A description of stormwater discharged from the site. The Permittee must note the presence of suspended sediment, turbidity, discoloration, and oil sheen, as applicable.

    i. Any water quality monitoring performed during inspection.

    j. General comments and notes, including a brief description of any BMP repairs, maintenance, or installations made following the inspection.

    k. An implementation schedule for the remedial actions that the Permittee plans to take if the site inspection indicates that the site is out of compliance. The remedial actions taken must meet the requirements of the SWPPP and the permit.

    l. A summary report of the inspection.

    m. The name, title, and signature of the person conducting the site inspection, a phone number or other reliable method to reach this person, and the

following statement: *I certify that this report is true, accurate, and complete to the best of my knowledge and belief.*

Table 3: Summary of Primary Monitoring Requirements

Size of Soil Disturbance[5]	Weekly Site Inspections	Weekly Sampling w/ Turbidity Meter	Weekly Sampling w/ Transparency Tube	Weekly pH Sampling[6]	CESCL Required for Inspections?
Sites that disturb fewer than 5 acres	Required	Sampling Required – either method[7]		Required	Yes
Sites that disturb 5 acres or more	Required	Required	Not Required[8]	Required	Yes

C. Turbidity/Transparency Sampling Requirements

1. Sampling Methods

a. If construction activity involves the disturbance of five (5) acres or more, the Permittee must conduct turbidity sampling per Special Condition S4.C.4.a, below.

b. If construction activity involves fewer than five (5) acres of soil disturbance, the Permittee must conduct either transparency sampling or turbidity sampling per Special Condition S4.C.4.a or b, below.

2. Sampling Frequency

a. The Permittee must sample all discharge points at least once every calendar week when stormwater (or authorized non-stormwater) discharges from the

[5] Soil disturbance is calculated by adding together all areas that will be affected by construction activity. Construction activity means clearing, grading, excavation, borrow pit areas, material storage areas, dump areas, haul roads, construction roads, side-cast areas, on-site portable rock crusher, staging yards, parking areas, off-site construction support activities, and any other activity that disturbs the surface of the land, including ingress/egress from the site.

[6] If construction activity involves significant concrete work (1,000 cubic yards of concrete or recycled concrete placed or poured over the life of a project) or the use of engineered soils (soil amendments including but not limited to Portland cement-treated base [CTB], cement kiln dust [CKD], or fly ash), and stormwater from the affected area drains to surface waters of the State or to a storm sewer stormwater collection system that drains to other surface waters of the State, the Permittee must conduct pH sampling in accordance with Special Condition S4.D.

[7] Sites that disturb fewer than5 acres of soil, must conduct turbidity or transparency sampling in accordance with Special Condition S4.C.4.a or b.

[8] Sites equal to or greater than 5 acres of soil disturbance must conduct turbidity sampling using a turbidity meter in accordance with Special Condition S4.C.4.a.

site or enters any on-site surface waters of the state (for example, a creek running through a site). Samples must be representative of the flow and characteristics of the discharge.

b. Sampling is not required when there is no discharge during a calendar week.

c. Sampling is not required outside of operational hours or during unsafe conditions.

d. If the Permittee is unable to sample during a monitoring period, the Permittee must include a brief explanation in the monthly Discharge Monitoring Report (DMR).

e. Sampling is not required before construction activity begins.

   i. DMRs are still required to be submitted monthly.

f. The Permittee may reduce the sampling frequency for temporarily stabilized, inactive sites to once every calendar month

   i. DMRs are still required to be submitted monthly.

3. Sampling Locations

a. Sampling is required at all points where stormwater associated with construction activity (or authorized non-stormwater) is discharged on-site to surface waters of the state (for example, a creek running through a site), inlets, open conveyance; or any offsite discharges, including those to ground, (The Permittee may discontinue sampling at discharge points that drain areas of the project that are fully stabilized to prevent erosion).

b. The Permittee must identify all sampling point(s) in the SWPPP and on the site map and clearly mark these points in the field with a flag, tape, stake or other visible marker.

c. Sampling is not required for discharge that is sent directly to sanitary or combined sewer systems.

d. The Permittee may discontinue sampling at discharge points in areas of the project where the Permittee no longer has operational control of the construction activity.

4. Sampling and Analysis Methods

a. The Permittee performs turbidity analysis with a calibrated turbidity meter (turbidimeter) either on site or at an accredited lab. The Permittee must record the results in the site logbook in nephelometric turbidity units (NTUs).

b. The Permittee performs transparency analysis on site with a 1¾ inch diameter, 60 centimeter (cm)-long transparency tube. The Permittee will record the results in the site logbook in centimeters (cm).

Table 4: Monitoring and Reporting Requirements

Parameter	Unit	Analytical Method	Sampling Frequency	Benchmark Value
Turbidity	NTU	SM2130	Weekly, if discharging	25 NTUs
Transparency	Cm	Manufacturer instructions, or Ecology guidance	Weekly, if discharging	33 cm

5. Turbidity/Transparency Benchmark Values and Reporting Triggers

The benchmark value for turbidity is 25 NTUs. The benchmark value for transparency is 33 centimeters (cm). Note: Benchmark values do not apply to discharges to segments of water bodies on Washington State's 303(d) list (Category 5) for turbidity, fine sediment, or phosphorus; these discharges are subject to a numeric effluent limit for turbidity. Refer to Special Condition S8 for more information and follow S5.F – Noncompliance Notification for reporting requirements applicable to discharges which exceed the numeric effluent limit for turbidity.

a. Turbidity 26 – 249 NTUs, or Transparency 32 – 7 cm:

If the discharge turbidity is 26 to 249 NTUs; or if discharge transparency is 32 to 7 cm, the Permittee must:

i. Immediately begin the process to fully implement and maintain appropriate source control and/or treatment BMPs, and no later than 10 days of the date the discharge exceeded the benchmark. If installation of necessary treatment BMPs is not feasible within 10 days, Ecology may approve additional time when the Permittee requests an extension within the initial 10-day response period.

ii. Review the SWPPP for compliance with Special Condition S9 and make appropriate revisions within 7 days of the date the discharge exceeded the benchmark.

iii. Document BMP implementation and maintenance in the site logbook.

b. Turbidity 250 NTUs or greater, or Transparency 6 cm or less:

If a discharge point's turbidity is 250 NTUs or greater, or if discharge transparency is less than or equal to 6 cm, the Permittee must complete the reporting and adaptive management process described below. For discharges which are subject to a numeric effluent limit for turbidity, see S5.F – Noncompliance Notification.

i. Within 24 hours, telephone or submit an electronic report to the applicable Ecology Region's Environmental Report Tracking System (ERTS) number), in accordance with Special Condition S5.A.

- **Central Region** (Okanogan, Chelan, Douglas, Kittitas, Yakima, Klickitat, Benton): (509) 575-2490
- **Eastern Region** (Adams, Asotin, Columbia, Ferry, Franklin, Garfield, Grant, Lincoln, Pend Oreille, Spokane, Stevens, Walla Walla, Whitman): (509) 329-3400
- **Northwest Region** (Kitsap, Snohomish, Island, King, San Juan, Skagit, Whatcom): (425) 649-7000
- **Southwest Region** (Grays Harbor, Lewis, Mason, Thurston, Pierce, Clark, Cowlitz, Skamania, Wahkiakum, Clallam, Jefferson, Pacific): (360) 407-6300

These numbers and a link to the ERTS reporting page are also listed at The CSWGP Homepage[9].

ii. Immediately begin the process to fully implement and maintain appropriate source control and/or treatment BMPs as soon as possible, addressing the problems within 10 days of the date the discharge exceeded the benchmark. If installation of necessary treatment BMPs is not feasible within 10 days, Ecology may approve additional time when the Permittee requests an extension within the initial 10-day response period.

iii. Sample discharges daily until:

a.) Turbidity is 25 NTUs (or lower); or

b.) Transparency is 33 cm (or greater); or

c.) The Permittee has demonstrated compliance with the water quality standard for turbidity:

1) No more than 5 NTUs over background turbidity*, if background is less than 50 NTUs, or

2) No more than 10% over background turbidity*, if background is 50 NTUs or greater; or

*Note: background turbidity in the receiving water must be measured immediately upstream (upgradient) or outside of the area of influence of the discharge.

d.) The discharge stops or is eliminated.

iv. Review the SWPPP for compliance with Special Condition S9 and make appropriate revisions within seven (7) days of the date the discharge exceeded the benchmark.

[9] https://ecology.wa.gov/regulations-permits/permits-certifications/stormwater-general-permits/construction-stormwater-permit

v. Document BMP implementation and maintenance in the site logbook.

Compliance with these requirements does not relieve the Permittee from responsibility to maintain continuous compliance with permit benchmarks.

D. pH Sampling Requirements – Significant Concrete Work or Engineered Soils

If construction activity involves significant concrete work (significant concrete work means greater than 1000 cubic yards placed or poured concrete or recycled concrete used over the life of a project) or the use of engineered soils (soil amendments including but not limited to Portland cement-treated base [CTB], cement kiln dust [CKD], or fly ash), and stormwater from the affected area drains to surface waters of the State or to a storm sewer system that drains to surface waters of the State, the Permittee must conduct pH sampling as set forth below. Note: In addition, discharges to segments of water bodies on Washington State's 303(d) list (Category 5) for high pH are subject to a numeric effluent limit for pH; refer to Special Condition S8.

1. The Permittee must perform pH analysis on site with a calibrated pH meter. The Permittee must record pH sampling results in the site logbook.
    a. pH meter calibration information must be maintained in the logbook.
2. During the applicable pH monitoring period defined below, the Permittee must obtain a representative sample of stormwater and conduct pH analysis at least once per week.
    a. For sites with significant concrete work, the Permittee must begin the pH sampling period when the concrete is first placed or poured and exposed to precipitation, and continue weekly throughout and after the concrete placement, pour and curing period, until stormwater pH is in the range of 6.5 to 8.5 (su).
    b. For sites with recycled concrete where monitoring is required, the Permittee must begin the weekly pH sampling period when the recycled concrete is first exposed to precipitation and must continue until the recycled concrete is fully stabilized with the stormwater pH in the range of 6.5 to 8.5 (su).
    c. For sites with engineered soils, the Permittee must begin the pH sampling period when the soil amendments are first exposed to precipitation and must continue until the area of engineered soils is fully stabilized.
3. The Permittee must sample pH in the sediment trap/pond(s) or other locations that receive stormwater runoff from the area of significant concrete work or engineered soils before the stormwater discharges to surface waters.
4. The benchmark value for pH is 8.5 standard units. Anytime sampling indicates that pH is 8.5 or greater, the Permittee must either:
    a. Prevent the high pH water (8.5 or above) from entering storm sewer systems or surface waters of the state; or

b. If necessary, adjust or neutralize the high pH water until it is in the range of pH 6.5 to 8.5 (su) using an appropriate treatment BMP such as carbon dioxide (CO2) sparging, dry ice or food grade vinegar. The Permittee must obtain written approval from Ecology before using any form of chemical treatment other than CO2 sparging, dry ice or food grade vinegar.

S5. REPORTING AND RECORDKEEPING REQUIREMENTS

A. High Turbidity Reporting

Anytime sampling performed in accordance with Special Condition S4.C indicates turbidity has reached the 250 NTUs or more (or transparency less than or equal to 6 cm), high turbidity reporting level, the Permittee must notify Ecology within 24 hours of becoming aware of a failure to comply either by calling the applicable Ecology Region's Environmental Report Tracking System (ERTS) number by phone or by submitting an electronic ERTS report through the online reporting form: (ERTS[10]). Also, see phone numbers in Special Condition S4.C.5.b.i.

B. Discharge Monitoring Reports (DMRs)

Permittees required to conduct water quality sampling in accordance with Special Conditions S4.C (Turbidity/Transparency), S4.D (pH), S8 (303[d]/TMDL sampling), and/or G12 (Additional Monitoring) must submit the results to Ecology.

Permittees must submit monitoring data using Ecology's WQWebDMR web application accessed through Ecology's Water Quality Permitting Portal.

Permittees unable to submit electronically (for example, those who do not have an internet connection) must contact Ecology to request a waiver and obtain instructions on how to obtain a paper copy DMR at:

Department of Ecology
Water Quality Program - Construction Stormwater
PO Box 47696
Olympia, WA 98504-7696

Permittees who obtain a waiver not to use WQWebDMR must use the forms provided to them by Ecology; submittals must be mailed to the address above. Permittees must submit DMR forms to be received by Ecology within 15 days following the end of each month.

If there was no discharge during a given monitoring period, all Permittees must submit a DMR as required with "no discharge" entered in place of the monitoring results. DMRs are required for the full duration of permit coverage (from the first full month following the effective date of permit coverage up until Ecology has approved termination of the coverage). For more information, contact Ecology staff using information provided at the PARIS [11]website.

[10]https://ecology.wa.gov/footer-pages/report-an-environmental-issue
[11] https://ecology.wa.gov/Regulations-Permits/Guidance-technical-assistance/Water-quality-permits-database

C. Records Retention

The Permittee must retain records of all monitoring information (site logbook, sampling results, inspection reports/checklists, etc.), Stormwater Pollution Prevention Plan, copy of the permit coverage letter (including Transfer of Coverage documentation) and any other documentation of compliance with permit requirements for the entire life of the construction project and for a minimum of five (5) years following the termination of permit coverage. Such information must include all calibration and maintenance records, and records of all data used to complete the application for this permit. This period of retention must be extended during the course of any unresolved litigation regarding the discharge of pollutants by the Permittee or when requested by Ecology.

D. Recording Results

For each measurement or sample taken, the Permittee must record the following information:

1. Date, place, method, and time of sampling or measurement.
2. The first and last name of the individual who performed the sampling or measurement.
3. The date(s) the analyses were performed.
4. The first and last name of the individual who performed the analyses.
5. The analytical techniques or methods used.
6. The results of all analyses.

E. Additional Monitoring by the Permittee

If the Permittee samples or monitors any pollutant more frequently than required by this permit using test procedures specified by Special Condition S4 of this permit, the sampling results for this monitoring must be included in the calculation and reporting of the data submitted in the Permittee's DMR.

F. Noncompliance Notification

In the event the Permittee is unable to comply with any part of the terms and conditions of this permit, and the resulting noncompliance may cause a threat to human health or the environment (such as but not limited to spills or fuels or other materials, catastrophic pond or slope failure, and discharges that violate water quality standards), or exceed numeric effluent limitations (see S8 – Discharges to 303(d) or TMDL Waterbodies), the Permittee must, upon becoming aware of the circumstance:

1. Notify Ecology within 24 hours of the failure to comply by calling the applicable Regional office ERTS phone number (refer to Special Condition S4.C.5.b.i, or go to the reporting website[12])

[12] https://ecology.wa.gov/footer-pages/report-an-environmental-issue

2. Immediately take action to prevent the discharge/pollution, or otherwise stop or correct the noncompliance, and, if applicable, repeat sampling and analysis of any noncompliance immediately and submit the results to Ecology within five (5) days of becoming aware of the violation (See S5.F.3, below, for details on submitting results in a report).

3. Submit a detailed written report to Ecology within five (5) days of the time the Permittee becomes aware of the circumstances, unless requested earlier by Ecology. The report must be submitted using Ecology's Water Quality Permitting Portal (WQWebPortal) – Permit Submittals, unless a waiver from electronic reporting has been granted according to S5.B. The report must contain a description of the noncompliance, including exact dates and times, and if the noncompliance has not been corrected, the anticipated time it is expected to continue; and the steps taken or planned to reduce, eliminate, and prevent reoccurrence of the noncompliance.

The Permittee must report any unanticipated bypass and/or upset that exceeds any effluent limit in the permit in accordance with the 24-hour reporting requirement contained in 40 C.F.R. 122.41(iii)(B).

Compliance with these requirements does not relieve the Permittee from responsibility to maintain continuous compliance with the terms and conditions of this permit or the resulting liability for failure to comply. Upon request of the Permittee, Ecology may waive the requirement for a written report on a case-by-case basis, if the immediate notification is received by Ecology within 24 hours.

G. Access to Plans and Records

1. The Permittee must retain the following permit documentation (plans and records) on site, or within reasonable access to the site, for use by the operator or for on-site review by Ecology or the local jurisdiction:

    a. General Permit

    b. Permit Coverage Letter

    c. Stormwater Pollution Prevention Plan (SWPPP)

    d. Site Logbook

    e. Erosivity Waiver (if applicable)

2. The Permittee must address written requests for plans and records listed above (Special Condition S5.G.1) as follows:

    a. The Permittee must provide a copy of plans and records to Ecology within 14 days of receipt of a written request from Ecology.

    b. The Permittee must provide a copy of plans and records to the public when requested in writing. Upon receiving a written request from the public for the Permittee's plans and records, the Permittee must either:

i. Provide a copy of the plans and records to the requester within 14 days of a receipt of the written request; or

ii. Notify the requester within 10 days of receipt of the written request of the location and times within normal business hours when the plans and records may be viewed; and provide access to the plans and records within 14 days of receipt of the written request; or

Within 14 days of receipt of the written request, the Permittee may submit a copy of the plans and records to Ecology for viewing and/or copying by the requester at an Ecology office, or a mutually agreed location. If plans and records are viewed and/or copied at a location other than at an Ecology office, the Permittee will provide reasonable access to copying services for which a reasonable fee may be charged. The Permittee must notify the requester within 10 days of receipt of the request where the plans and records may be viewed and/or copied.

S6. PERMIT FEES

The Permittee must pay permit fees assessed by Ecology. Fees for stormwater discharges covered under this permit are established by Chapter 173-224 WAC. Ecology continues to assess permit fees until the permit is terminated in accordance with Special Condition S10 or revoked in accordance with General Condition G5.

S7. SOLID AND LIQUID WASTE DISPOSAL

The Permittee must handle and dispose of solid and liquid wastes generated by construction activity, such as demolition debris, construction materials, contaminated materials, and waste materials from maintenance activities, including liquids and solids from cleaning catch basins and other stormwater facilities, in accordance with:

1. Special Condition S3, Compliance with Standards.
2. WAC 173-216-110.
3. Other applicable regulations.

S8. DISCHARGES TO 303(d) OR TMDL WATERBODIES

A. Sampling and Numeric Effluent Limits for Certain Discharges to 303(d)-Listed Water Bodies

1. Permittees who discharge to segments of water bodies listed as impaired by the State of Washington under Section 303(d) of the Clean Water Act for turbidity, fine sediment, high pH, low dissolved oxygen or phosphorus, must conduct water quality sampling according to the requirements of this section, and Special Conditions S4.C.2.b-f and S4.C.3.b-d, and must comply with the applicable numeric effluent limitations in S8.C and S8.D.

2. All references and requirements associated with Section 303(d) of the Clean Water Act mean the most current listing by Ecology of impaired waters (Category 5) that exists on January 1, 2026, or the date when the operator's complete permit application is received by Ecology, whichever is later. For information about which surface waters are on the Category 5 list of impaired waters, refer to Ecology's Water Quality Atlas[13].

B. Limits on Coverage for New Discharges to TMDL or 303(d)-Listed Waters

Construction sites that discharge to a TMDL or 303(d)-listed waterbody are not eligible for coverage under this permit unless the operator:

1. Prevents exposing stormwater to pollutants for which the waterbody is impaired, and retains documentation in the SWPPP that details procedures taken to prevent exposure on site; or

2. Documents that the pollutants for which the waterbody is impaired are not present at the site, and retains documentation of this finding within the SWPPP; or

3. Provides Ecology with data indicating the discharge is not expected to cause or contribute to an exceedance of a water quality standard and retains such data on site with the SWPPP. The operator must provide data and other technical information to Ecology that sufficiently demonstrate:

    a. For discharges to waters without an EPA-approved or -established TMDL, that the discharge of the pollutant for which the water is impaired will meet in-stream water quality criteria at the point of discharge to the waterbody; or

    b. For discharges to waters with an EPA-approved or -established TMDL, that there is sufficient remaining waste load allocation in the TMDL to allow construction stormwater discharge and that existing dischargers to the waterbody are subject to compliance schedules designed to bring the waterbody into attainment with water quality standards.

[13] https://apps.ecology.wa.gov/waterqualityatlas/wqa/map

Operators of construction sites are eligible for coverage under this permit only after Ecology makes an affirmative determination that the discharge will not cause or contribute to the existing impairment or exceed the TMDL.

C. Sampling and Numeric Effluent Limits for Discharges to Water Bodies on the 303(d) List for Turbidity, Fine Sediment, Low Dissolved Oxygen or Phosphorus

1. Permittees who discharge to segments of water bodies on the 303(d) list (Category 5) for turbidity, fine sediment, low dissolved oxygen or phosphorus must conduct turbidity sampling in accordance with Special Condition S4.C.2 and comply with either applicable numeric effluent limits noted in Table 5 below.

2. As an alternative to the 25 NTUs effluent limit noted in Table 5 below (applied at the point where stormwater [or authorized non-stormwater] is discharged off-site), Permittees may choose to comply with the surface water quality standard for turbidity. The standard is: no more than 5 NTUs over background turbidity when the background turbidity is 50 NTUs or less, or no more than a 10% increase in turbidity when the background turbidity is more than 50 NTUs. To use the water quality standard requirement, the sampling must take place at the following locations:

    a. Background turbidity in the 303(d)-listed receiving water immediately upstream (upgradient) or outside the area of influence of the discharge.

    b. Turbidity at the point of discharge into the 303(d)-listed receiving water, inside the area of influence of the discharge.

3. Discharges that exceed the numeric effluent limit for turbidity constitute a violation of this permit.

4. Permittees whose discharges exceed the numeric effluent limit must sample discharges daily until the violation is corrected and comply with the non-compliance notification requirements in Special Condition S5.F.

Table 5: Turbidity, Fine Sediment, Low Dissolved Oxygen & Phosphorus Sampling and Limits for 303(d)-Listed Waters

Parameter identified in 303(d) listing	Parameter Sampled		Analytical Method	Sampling Frequency	Numeric Effluent Limit[1]
• Turbidity • Fine Sediment • Phosphorus • Low Dissolved oxygen	Turbidity	NTU	SM2130	Weekly, if discharging	25 NTUs, at the point where stormwater is discharged from the site; ***OR*** In compliance with the surface water quality standard for turbidity (S8.C.2.a)
• If Dewatering	Turbidity	NTU	SM2130	Daily, if discharging	25 NTUs, at the point where stormwater is discharged from the site, OR In compliance with the surface water quality standard for turbidity (S8.C.2.a)

1. Permittees subject to a numeric effluent limit for turbidity may, at their discretion, choose either numeric effluent limitation based on site-specific considerations including, but not limited to, safety, access and convenience.

D. Discharges to Water Bodies on the 303(d) List for High pH

1. Permittees who discharge to segments of water bodies on the 303(d) list (Category 5) for high pH must conduct pH sampling in accordance with the table below and comply with the numeric effluent limit of pH 6.5 to 8.5 su (Table 6).

Table 6: pH Sampling and Limits for 303(d)-Listed Waters

Parameter identified in 303(d) listing	Parameter Sampled/Units	Analytical Method	Sampling Frequency	Numeric Effluent Limit
High pH	pH /Standard Units	pH meter	Weekly, if discharging	In the range of 6.5 – 8.5 su

2. At the Permittee's discretion, compliance with the limit shall be assessed at one of the following locations:

    a. Directly in the 303(d)-listed waterbody segment, inside the immediate area of influence of the discharge; or

    b. Alternatively, the Permittee may measure pH at the point where the discharge leaves the construction site, rather than in the receiving water.

3. Discharges that exceed the numeric effluent limit for pH (outside the range of 6.5 – 8.5 su) constitute a violation of this permit.

4. Permittees whose discharges exceed the numeric effluent limit must sample discharges daily until the violation is corrected and comply with the non-compliance notification requirements in Special Condition S5.F.

E. Sampling and Limits for Sites Discharging to Waters Covered by a TMDL or another Pollution Control Plan

1. Discharges to a waterbody that is subject to a Total Maximum Daily Load (TMDL) for turbidity, fine sediment, low dissolved oxygen, high pH, or phosphorus must be consistent with the TMDL. Refer to Water Quality improvement projects[14] for more information on TMDLs.

    a. Where an applicable TMDL sets specific waste load allocations or requirements for discharges covered by this permit, discharges must be consistent with any specific waste load allocations or requirements established by the applicable TMDL.

        i. The Permittee must sample discharges weekly, unless otherwise specified by the TMDL, to evaluate compliance with the specific waste load allocations or requirements.

        ii. Analytical methods used to meet the monitoring requirements must conform to the latest revision of the *Guidelines Establishing Test Procedures for the Analysis of Pollutants* contained in 40 CFR Part 136.

        iii. Turbidity and pH methods need not be accredited or registered unless conducted at a laboratory which must otherwise be accredited or registered.

    b. Where an applicable TMDL has established a general waste load allocation for construction stormwater discharges, but has not identified specific requirements, compliance with Special Conditions S4 (Monitoring) and S9 (SWPPPs) will constitute compliance with the approved TMDL.

    c. Where an applicable TMDL has not specified a waste load allocation for construction stormwater discharges, but has not excluded these discharges,

[14] https://ecology.wa.gov/water-shorelines/water-quality/water-improvement/total-maximum-daily-load-process/directory-of-improvement-projects

compliance with Special Conditions S4 (Monitoring) and S9 (SWPPPs) will constitute compliance with the approved TMDL.

d. Where an applicable TMDL specifically precludes or prohibits discharges from construction activity, the operator is not eligible for coverage under this permit.

S9. STORMWATER POLLUTION PREVENTION PLAN

The Permittee must prepare and properly implement an adequate Stormwater Pollution Prevention Plan (SWPPP) for construction activity in accordance with the requirements of this permit beginning with initial soil disturbance and until final stabilization.

A. The Permittee's SWPPP must meet the following objectives:

1. To identify best management practices (BMPs) which prevent erosion and sedimentation, and to reduce, eliminate or prevent stormwater contamination and water pollution from construction activity.
2. To prevent violations of surface water quality, groundwater quality, or sediment management standards.
3. To control peak volumetric flow rates and velocities of stormwater discharges.

B. General Requirements

1. The SWPPP must include a narrative and drawings. All BMPs must be clearly referenced in the narrative and marked on the drawings. The SWPPP narrative must include documentation to explain and justify the pollution prevention decisions made for the project. Documentation must include:
    a. Information about existing site conditions (topography, drainage, soils, vegetation, etc.).
    b. Potential erosion problem areas.
    c. The 13 elements of a SWPPP in Special Condition S9.D.1-13, including BMPs used to address each element.
    d. Construction phasing/sequence and general BMP implementation schedule.
    e. The actions to be taken if BMP performance goals are not achieved—for example, a contingency plan for additional treatment and/or storage of stormwater that would violate the water quality standards if discharged.
    f. Engineering calculations for ponds, treatment systems, and any other designed structures. When a treatment system requires engineering calculations, these calculations must be included in the SWPPP. Engineering calculations do not need to be included in the SWPPP for treatment systems that do not require such calculations.
2. The Permittee must modify the SWPPP if, during inspections or investigations conducted by the owner/operator, or the applicable local or state regulatory authority, it is determined that the SWPPP is, or would be, ineffective in eliminating or significantly minimizing pollutants in stormwater discharges from the site. The Permittee must then:
    a. Review the SWPPP for compliance with Special Condition S9 and make appropriate revisions within 7 days of the inspection or investigation.

b. Immediately begin the process to fully implement and maintain appropriate source control and/or treatment BMPs as soon as possible, addressing the problems no later than 10 days from the inspection or investigation. If installation of necessary treatment BMPs is not feasible within 10 days, Ecology may approve additional time when an extension is requested by a Permittee within the initial 10-day response period.

c. Document BMP implementation and maintenance in the site logbook.

The Permittee must modify the SWPPP whenever there is a change in design, construction, operation, or maintenance at the construction site that has, or could have, a significant effect on the discharge of pollutants to waters of the State.

C. Stormwater Best Management Practices (BMPs)

BMPs must be consistent with:

1. *Stormwater Management Manual for Western Washington* (most current approved edition at the time this permit was issued), for sites west of the crest of the Cascade Mountains; or

2. *Stormwater Management Manual for Eastern Washington* (most current approved edition at the time this permit was issued), for sites east of the crest of the Cascade Mountains; or

3. Revisions to the manuals listed in Special Condition S9.C.1 & 2, or other stormwater management guidance documents or manuals which provide an equivalent level of pollution prevention, that are approved by Ecology and incorporated into this permit in accordance with the permit modification requirements of WAC 173-226-230; or

4. Documentation in the SWPPP that the BMPs selected provide an equivalent level of pollution prevention, compared to the applicable stormwater management manuals, including:

    a. The technical basis for the selection of all stormwater BMPs (scientific, technical studies, and/or modeling) that support the performance claims for the BMPs being selected.

    b. An assessment of how the selected BMP will satisfy AKART requirements and the applicable federal technology-based treatment requirements under 40 CFR part 125.3.

D. SWPPP – Narrative Contents and Requirements

The Permittee must include each of the 13 elements below in Special Condition S9.D.1-13 in the narrative of the SWPPP and implement them unless site conditions render the element unnecessary and the exemption from that element is clearly justified in the SWPPP.

1. Preserve Vegetation/Mark Clearing Limits

a. Before beginning land-disturbing activities, including clearing and grading, clearly mark all clearing limits, sensitive areas and their buffers, and trees that are to be preserved within the construction area.

b. Retain the duff layer, native topsoil, and natural vegetation in an undisturbed state to the maximum degree practicable.

2. Establish Construction Access

a. Limit construction vehicle access and exit to one route, if possible.

b. Stabilize access points with a pad of quarry spalls, crushed rock, or other equivalent BMPs, to minimize tracking sediment onto roads. Do not use crushed concrete, for construction access stabilization.

c. Locate wheel wash or tire baths on site, if the stabilized construction entrance is not effective in preventing sediment from being tracked onto roads.. Wheel washes and tire baths must comply with special condition S9.D.9.d to prevent discharge to surface waters and ensure appropriate treatment and disposal methods of wash water.

d. If sediment is tracked off-site, clean the affected roadway thoroughly at the end of each day, or more frequently as necessary (for example, during wet weather). Remove sediment from roads by shoveling, sweeping, or pickup and transport of the sediment to a controlled sediment disposal area.

e. Conduct street washing only after sediment removal in accordance with Special Condition S9.D.2.d.

f. Control street wash wastewater by pumping back on site or otherwise preventing it from discharging into systems tributary to waters of the State.

3. Control Flow Rates

a. Protect properties and waterways downstream of construction sites from erosion and the associated discharge of turbid waters due to increases in the velocity and peak volumetric flow rate of stormwater runoff from the project site

b. Where necessary to comply with Special Condition S9.D.3.a, construct stormwater infiltration or detention BMPs as one of the first steps in grading. Assure that detention BMPs function properly before constructing site improvements (for example, impervious surfaces).

c. If permanent infiltration ponds are used for flow control during construction, protect these facilities from sedimentation during the construction phase.

4. Install Sediment Controls

The Permittee must design, install and maintain effective erosion controls and sediment controls to minimize the discharge of pollutants. At a minimum, the Permittee must:

a. Construct sediment control BMPs (sediment ponds, traps, filters, infiltration facilities, etc.) as one of the first steps in grading. These BMPs must be functional before other land disturbing activities take place.

b. Minimize sediment discharges from the site. The design, installation and maintenance of erosion and sediment controls must address factors such as the amount, frequency, intensity and duration of precipitation, the nature of resulting stormwater runoff, and soil characteristics, including the range of soil particle sizes expected to be present on the site.

c. Direct stormwater runoff from disturbed areas through a sediment pond or other appropriate sediment removal BMP, before the runoff leaves a construction site or before discharge to an infiltration facility. Runoff from fully stabilized areas may be discharged without a sediment removal BMP but must meet the flow control performance standard of Special Condition S9.D.3.a.

d. Locate BMPs intended to trap sediment on site in a manner to avoid interference with the movement of juvenile salmonids attempting to enter off-channel areas or drainages.

e. Provide and maintain natural buffers around surface waters, direct stormwater to vegetated areas to increase sediment removal and maximize stormwater infiltration, unless infeasible.

f. Where feasible, design outlet structures that withdraw impounded stormwater from the surface to avoid discharging sediment that is still suspended lower in the water column.

5. Stabilize Soils

a. The Permittee must stabilize exposed and unworked by application of effective BMPs that prevent erosion. Applicable BMPs include, but are not limited to: temporary and permanent seeding, sodding, mulching, plastic covering, erosion control fabrics and matting, soil application of polyacrylamide (PAM), the early application of gravel base on areas to be paved, and dust control.

b. The Permittee must control stormwater volume and velocity within the site to minimize soil erosion.

c. The Permittee must control stormwater discharges, including both peak flow rates and total stormwater volume, to minimize erosion at outlets and to minimize downstream channel and stream bank erosion.

d. Depending on the geographic location of the project, the Permittee must not allow soils and stockpiles to remain exposed and unworked for more than the time periods set forth below to prevent erosion.

- **West of the Cascade Mountains Crest**
  During the dry season (May 1 - September 30): 7 days
  During the wet season (October 1 - April 30): 2 days
- **East of the Cascade Mountains Crest**, except for Central Basin*
  During the dry season (July 1 - September 30): 10 days
  During the wet season (October 1 - June 30): 5 days
- **The Central Basin***, East of the Cascade Mountains Crest
  During the dry Season (July 1 - September 30): 30 days
  During the wet season (October 1 - June 30): 15 days

***Note: The Central Basin** is defined as the portions of Eastern Washington with mean annual precipitation of less than 12 inches.

e. The Permittee must stabilize soils at the end of the shift before a holiday or weekend if needed based on the weather forecast.

f. The Permittee must stabilize soil stockpiles from erosion, protected with sediment trapping measures, and where possible, be located away from storm drain inlets, waterways, and drainage channels.

g. The Permittee must minimize the amount of soil exposed during construction activity.

h. The Permittee must minimize the disturbance of steep slopes.

i. The Permittee must minimize soil compaction and, unless infeasible, preserve topsoil.

6. Protect Slopes

a. The Permittee must design and construct cut-and-fill slopes in a manner to minimize erosion. Applicable practices include, but are not limited to, reducing continuous length of slope with terracing and diversions, reducing slope steepness, and roughening slope surfaces (for example, track walking).

b. The Permittee must divert off-site stormwater (run-on) or groundwater away from slopes and disturbed areas with interceptor dikes, pipes, and/or swales. Off-site stormwater should be managed separately from stormwater generated on the site.

c. At the top of slopes, collect drainage in pipe slope drains or protected channels to prevent erosion.

i. West of the Cascade Mountains Crest: Temporary pipe slope drains must be sized to convey the flow rate calculated by one of the following methods:

- Single Event Hydrograph Method: the peak volumetric flow rate calculated using a 10-minute flow rate from a Type 1A, 10-year, 24-hour frequency storm for the developed condition, OR

- Continuous Simulation Method: Alternatively, the 10-year peak flow rates determined by an approved continuous runoff model with a 15-minute time step may be used. The hydrologic analysis must use the existing land cover condition for predicting flow rates from tributary areas outside the project limits. For tributary areas on the project site, the analysis must use the temporary or permanent project land cover condition, whichever will produce the highest flow rates. If using the Western Washington Hydrology Model (WWHM) to predict flows, bare soil areas should be modeled as "lawn area."

ii. East of the Cascade Mountains Crest: Temporary pipe slope drains must be sized to handle the expected peak flow rate from a 6-month, 3-hour storm for the developed condition, referred to as the short duration storm.

d. Place excavated material on the uphill side of trenches, consistent with safety and space considerations.

e. Place check dams at regular intervals within constructed channels that are cut down a slope.

7. Protect Drain Inlets

a. Protect all storm drain inlets made operable during construction so that stormwater runoff does not enter the conveyance system without first being filtered or treated to remove sediment.

b. Clean or remove and replace inlet protection devices when sediment has filled one-third of the available storage (unless a different standard is specified by the product manufacturer).

8. Stabilize Channels and Outlets

a. Design, construct and stabilize all on-site conveyance channels to prevent erosion from the following expected peak flows:

i. West of the Cascade Mountains Crest: calculate using one of the following methods:

- Single Event Hydrograph Method: Channels must handle the peak volumetric flow rate using a 10-minute time step from a Type 1A, 10-year, 24-hour frequency storm, OR
- Continuous Simulation Method Alternatively, the 10-year, peak flow rate indicated by an approved continuous runoff model with a 15-minute time step may be used. The hydrologic analysis must use the existing land cover condition for predicting flow rates from tributary areas outside the project limits. For tributary areas on the project site, the analysis must use the temporary or permanent project land cover condition, whichever will produce the highest flow rates. If using the

WWHM to predict flows, bare soil areas should be modeled as "lawn area."

ii. East of the Cascade Mountains Crest: Channels must handle the expected peak flow rate from a 6-month, 3-hour storm for the developed condition, referred to as the short duration storm.

b. Provide stabilization, including armoring material, adequate to prevent erosion of outlets, adjacent stream banks, slopes, along construction road shoulders, sloped work areas, and downstream reaches at the outlets of all conveyance systems.

9. Control Pollutants

Design, install, implement and maintain effective pollution prevention measures to minimize the discharge of pollutants. The Permittee must:

a. Handle and dispose of all pollutants, including waste materials and demolition debris that occur on site in a manner that does not cause contamination of stormwater or waters of the state.

b. Provide cover, containment, and protection from vandalism for all chemicals, liquid products, petroleum products, and other materials that have the potential to pose a threat to human health or the environment. Minimize storage of hazardous materials on-site. Safety Data Sheets (SDS) should be supplied for all materials stored. Keep chemicals in their original labeled containers. On-site fueling tanks must include secondary containment. Secondary containment means placing tanks or containers within an impervious structure capable of containing 110% of the volume of the largest tank within the containment structure. Double-walled tanks do not require additional secondary containment. If the containment water is free from indicators of contamination, such as oil sheen, turbidity, color, odor, it may be discharged with other stormwater. Visibly contaminated containment water shall be disposed of appropriately.

c. Conduct maintenance, fueling, and repair of heavy equipment and vehicles using spill prevention and control measures. Clean contaminated surfaces immediately following any spill incident.

d. Discharge wheel wash or tire bath wastewater to a separate on-site treatment system that prevents discharge to surface water, or to the sanitary sewer with local sewer district approval.

e. Apply fertilizers and pesticides in a manner and at application rates that will not result in loss of chemical to stormwater runoff. Follow manufacturers' label requirements for application rates and procedures.

f. Use BMPs to prevent contamination of stormwater runoff by pH-modifying sources. The sources for this contamination include, but are not limited to: bulk cement, cement kiln dust, fly ash, new concrete washing and curing

waters, recycled concrete, waste streams generated from concrete grinding and sawing, exposed aggregate processes, dewatering concrete vaults, concrete pumping and mixer washout waters. (Also refer to the definition for "concrete wastewater" in Appendix A – Definitions.)

g. Adjust the pH of stormwater or authorized non-stormwater if necessary to prevent an exceedance of groundwater and/or surface water quality standards.

h. Assure that washout of concrete trucks is performed off-site or in designated concrete washout areas only. Do not wash out concrete truck drums onto the ground, or into storm drains, open ditches, streets, or streams. Washout of small concrete handling equipment may be disposed of in a formed area awaiting concrete where it will not contaminate surface or groundwater. Do not dump excess concrete on site, except in designated concrete washout areas. Concrete spillage or concrete discharge directly to groundwater or surface waters of the State is prohibited. At no time shall concrete be washed off into the footprint of an area where an infiltration BMP will be installed.

i. Obtain written approval from Ecology before using any chemical treatment, with the exception of CO2, dry ice or food grade vinegar, to adjust pH.

j. Uncontaminated water from water-only based shaft drilling for construction of building, road, and bridge foundations may be infiltrated provided the wastewater is managed in a way that prohibits discharge to surface waters. Prior to infiltration, water from water-only based shaft drilling that comes into contact with curing concrete must be neutralized until pH is in the range of 6.5 to 8.5 (su).

k. If a construction activity involves the demolition or renovation of any buildings built before 1980, the permittee must implement BMP S438 [BMPs for Construction Demolition] of the SWMMMs.

10. Control Dewatering

a. Permittees must discharge foundation, vault, and trench dewatering water, which have characteristics similar to stormwater runoff at the site, in conjunction with BMPs to reduce sedimentation before discharge to a sediment trap or sediment pond.

b. Permittees may discharge clean, non-turbid dewatering water, such as well-point groundwater, to systems tributary to, or directly into surface waters of the State, as specified in Special Condition S9.D.8, provided the dewatering flow does not cause erosion or flooding of receiving waters. Do not route clean dewatering water through stormwater sediment ponds. Note that “surface waters of the State” may exist on a construction site as well as off-site; for example, a creek running through a site.

c. Other dewatering treatment or disposal options may include:

i. Infiltration

ii. Transport off-site in a vehicle, such as a vacuum flush truck, for legal disposal in a manner that does not pollute state waters.

iii. Ecology-approved on-site chemical treatment or other suitable treatment technologies (See S9.D.9.i, regarding chemical treatment written authorization).

iv. Sanitary or combined sewer discharge with local sewer district approval, if there is no other option.

v. Use of a sedimentation bag with discharge to a ditch or swale for small volumes of localized dewatering.

d. Permittees must handle highly turbid or contaminated dewatering water separately from stormwater.

11. Maintain BMPs

a. Permittees must maintain and repair all temporary and permanent erosion and sediment control BMPs as needed to assure continued performance of their intended function in accordance with BMP specifications.

b. Permittees must remove all temporary erosion and sediment control BMPs within 30 days after achieving final site stabilization or after the temporary BMPs are no longer needed.

12. Manage the Project

a. Phase development projects to the maximum degree practicable and take into account seasonal work limitations.

b. Inspect, maintain and repair all BMPs as needed to assure continued performance of their intended function. Conduct site inspections and monitoring in accordance with Special Condition S4.

c. Maintain, update, and implement the SWPPP in accordance with Special Conditions S3, S4, and S9.

13. Protect Infiltration BMPs

Permittees must protect existing and proposed infiltration BMPs during construction. The primary purpose of on-site Stormwater Management (often referred to as low impact development, or LID) is to reduce the disruption of the natural site hydrology through infiltration. LID BMPs are permanent facilities.

a. Permittees must protect all LID BMPs (including, but not limited to, Bioretention and Rain Garden facilities) from sedimentation through installation and maintenance of erosion and sediment control BMPs on portions of the site that drain into the infiltration BMPs. Restore the BMPs to their fully functioning condition if they accumulate sediment during

construction. Restoring the BMP must include removal of sediment and any sediment-laden soils within the BMP and replacing the removed soils with soils meeting the design specification.

b. Permittees must maintain the infiltration capabilities of infiltration BMPs by protecting against compaction by construction equipment and foot traffic. Protect completed lawn and landscaped areas from compaction due to construction equipment.

c. Permittees must control erosion and avoid introducing sediment from surrounding land uses onto permeable pavements. Do not allow muddy construction equipment on the base material or pavement. Do not allow sediment-laden runoff onto permeable pavements or base materials.

d. Permittees must clean permeable pavements fouled with sediments or no longer passing an initial infiltration test using local stormwater manual methodology or the manufacturer's procedures.

e. Permittees must keep all heavy equipment off existing soils under infiltration BMPs that have been excavated to final grade to retain the infiltration rate of the soils.

E. SWPPP – Map Contents and Requirements

The Permittee's SWPPP must also include a vicinity map or general location map (for example, a USGS quadrangle map, a portion of a county or city map, or other appropriate map) with enough detail to identify the location of the construction site and receiving waters within one mile of the site.

The SWPPP must also include a legible site map (or maps) showing the entire construction site. The following features must be identified, unless not applicable due to site conditions.

1. The direction of north, property lines, and existing structures and roads.
2. Cut and fill slopes indicating the top and bottom of slope catch lines.
3. Approximate slopes, contours, and direction of stormwater flow before and after major grading activities.
4. Areas of soil disturbance and areas that will not be disturbed.
5. Locations of structural and nonstructural controls (BMPs) identified in the SWPPP.
6. Locations of off-site material, stockpiles, waste storage, borrow areas, and vehicle/equipment storage areas.
7. Locations of all surface water bodies, including wetlands.
8. Locations where stormwater or non-stormwater discharges off-site and/or to a surface waterbody, including wetlands.
9. Location of water quality sampling station(s), if sampling is required by state or local permitting authority.

10. Areas where final stabilization has been accomplished and no further construction-phase permit requirements apply.
11. Location or proposed location of infiltration facilities.

S10. NOTICE OF TERMINATION (NOT)

Partial terminations of permit coverage are not authorized.

A. Conditions for an NOT

The site is eligible for final termination of coverage when it has met any of the following conditions:

1. The site has undergone final stabilization, the Permittee has removed all temporary BMPs (except biodegradable BMPs clearly manufactured with the intention for the material to be left in place and not interfere with maintenance or land use), and all stormwater discharges associated with construction activity have been eliminated; or
2. All portions of the site that have not undergone final stabilization per Special Condition S10.A.1 have been sold and/or transferred (per Special Condition S2.A), and the Permittee no longer has operational control of the construction activity; or
3. For residential construction only, the Permittee has completed temporary stabilization, and the homeowners have taken possession of the residences.

B. Process for Terminating

When the site is eligible for termination, the Permittee must submit a complete and accurate Notice of Termination (NOT) form, signed in accordance with General Condition G2, to:

Department of Ecology
Water Quality Program - Permit Fee Unit
PO Box 47600
Olympia, WA 98504-7696

When an electronic termination form is available, the Permittee may choose to submit a complete and accurate Notice of Termination (NOT) form through the Water Quality Permitting Portal rather than mailing a hardcopy as noted above.

The termination is effective on the 31st **Calendar Day** following the date Ecology receives a complete NOT form, unless Ecology notifies the Permittee that termination request is denied because the Permittee has not met the eligibility requirements in Special Condition S10.A.

Permittees are required to comply with all conditions and effluent limitations in the permit until the permit has been terminated.

Permittees transferring the property to a new property owner or operator/Permittee are required to complete and submit the Notice of Transfer form to Ecology but are not required to submit a Notice of Termination form for this type of transaction.

Note: When site conditions cause a delay in Ecology's inspection, the effective date of the NOT will be back dated to the 31st day following submittal, if the site inspection verifies that the site is eligible for termination

If Ecology notifies the Permittee that termination request is denied because the Permittee has not met the eligibility requirements in Special Condition S10.A, the Permittee remains under permit coverage and must continue to comply with all permit conditions.

GENERAL CONDITIONS

G1. DISCHARGE VIOLATIONS

All discharges and activities authorized by this general permit must be consistent with the terms and conditions of this general permit. Any discharge of any pollutant more frequent than or at a level in excess of that identified and authorized by the general permit must constitute a violation of the terms and conditions of this permit.

G2. SIGNATORY REQUIREMENTS

A. All permit applications (including NOIs, NOTs, and Transfer of Coverage forms) signed and certified:

1. In the case of corporations, by a responsible corporate officer.
2. In the case of a partnership, by a general partner of a partnership.
3. In the case of sole proprietorship, by the proprietor.
4. In the case of a municipal, state, or other public facility, by either a principal executive officer or ranking elected official.

B. All reports required by this permit and other information requested by Ecology must be signed by a person described above or by a duly authorized representative of that person. A person is a duly authorized representative only if:

1. The authorization is made in writing by a person described above and submitted to Ecology.
2. The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility, such as the position of plant manager, superintendent, position of equivalent responsibility, or an individual or position having overall responsibility for environmental matters.

C. Changes to authorization. If an authorization under paragraph G2.B.2 above is no longer accurate because a different individual or position has responsibility for the overall operation of the facility, a new authorization satisfying the requirements of paragraph G2.B.2 above must be submitted to Ecology prior to or together with any reports, information, or applications to be signed by an authorized representative.

D. Certification. Any person signing a document under this section must make the following certification:

"I certify under penalty of law, that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

G3. RIGHT OF INSPECTION AND ENTRY

The Permittee must allow an authorized representative of Ecology, upon the presentation of credentials and such other documents as may be required by law:

A. To enter upon the premises where a discharge is located or where any records are kept under the terms and conditions of this permit.

B. To have access to and copy, at reasonable times and at reasonable cost, any records required to be kept under the terms and conditions of this permit.

C. To inspect, at reasonable times, any facilities, equipment (including monitoring and control equipment), practices, methods, or operations regulated or required under this permit.

D. To sample or monitor, at reasonable times, any substances or parameters at any location for purposes of assuring permit compliance or as otherwise authorized by the Clean Water Act.

G4. GENERAL PERMIT MODIFICATION AND REVOCATION

This permit may be modified, revoked and reissued, or terminated in accordance with the provisions of Chapter 173-226 WAC. Grounds for modification, revocation and reissuance, or termination include, but are not limited to, the following:

A. When a change occurs in the technology or practices for control or abatement of pollutants applicable to the category of dischargers covered under this permit.

B. When effluent limitation guidelines or standards are promulgated pursuant to the CWA or Chapter 90.48 RCW, for the category of dischargers covered under this permit.

C. When a water quality management plan containing requirements applicable to the category of dischargers covered under this permit is approved, or

D. When information is obtained that indicates cumulative effects on the environment from dischargers covered under this permit are unacceptable.

G5. REVOCATION OF COVERAGE UNDER THE PERMIT

Pursuant to Chapter 43.21B RCW and Chapter 173-226 WAC, the Director may terminate coverage for any discharger under this permit for cause. Cases where coverage may be terminated include, but are not limited to, the following:

A. Violation of any term or condition of this permit.

B. Obtaining coverage under this permit by misrepresentation or failure to disclose fully all relevant facts.

C. A change in any condition that requires either a temporary or permanent reduction or elimination of the permitted discharge.

D. Failure or refusal of the Permittee to allow entry as required in RCW 90.48.090.

E. A determination that the permitted activity endangers human health or the environment, or contributes to water quality standards violations.

F. Nonpayment of permit fees or penalties assessed pursuant to RCW 90.48.465 and Chapter 173-224 WAC.

G. Failure of the Permittee to satisfy the public notice requirements of WAC 173-226-130(5), when applicable.

Ecology may require any discharger under this permit to apply for and obtain coverage under an individual permit or another more specific general permit.

Permittees who have their coverage revoked for cause according to WAC 173-226-240 may request temporary coverage under this permit during the time an individual permit is being developed, provided the request is made within ninety (90) days from the time of revocation and is submitted along with a complete individual permit application form.

G6. REPORTING A CAUSE FOR MODIFICATION

The Permittee must submit a new application, or a supplement to the previous application, whenever a material change to the construction activity or in the quantity or type of discharge is anticipated which is not specifically authorized by this permit. This application must be submitted at least sixty (60) days prior to any proposed changes. Filing a request for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance does not relieve the Permittee of the duty to comply with the existing permit until it is modified or reissued.

G7. COMPLIANCE WITH OTHER LAWS AND STATUTES

Nothing in this permit will be construed as excusing the Permittee from compliance with any applicable federal, state, or local statutes, ordinances, or regulations.

G8. DUTY TO REAPPLY

The Permittee must apply for permit renewal at least 180 days prior to the specified expiration date of this permit. The Permittee must reapply using the electronic application form (NOI) available on Ecology's website. Permittees unable to submit electronically (for example, those who do not have an internet connection) must contact Ecology to request a waiver and obtain instructions on how to obtain a paper NOI.

Department of Ecology
Water Quality Program - Construction Stormwater
PO Box 47696
Olympia, WA 98504-7696

G9. REMOVED SUBSTANCE

The Permittee must not re-suspend or reintroduce collected screenings, grit, solids, sludges, filter backwash, or other pollutants removed in the course of treatment or control of stormwater to the final effluent stream for discharge to state waters.

G10. DUTY TO PROVIDE INFORMATION

The Permittee must submit to Ecology, within a reasonable time, all information that Ecology may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit or to determine compliance with this permit. The Permittee must also submit to Ecology, upon request, copies of records required to be kept by this permit [40 CFR 122.41(h)].

G11. OTHER REQUIREMENTS OF 40 CFR

All other requirements of 40 CFR 122.41 and 122.42 are incorporated in this permit by reference.

G12. ADDITIONAL MONITORING

Ecology may establish specific monitoring requirements in addition to those contained in this permit by administrative order or permit modification.

G13. PENALTIES FOR VIOLATING PERMIT CONDITIONS

Any person who is found guilty of willfully violating the terms and conditions of this permit shall be deemed guilty of a crime, and upon conviction thereof shall be punished by a fine of up to ten thousand dollars ($10,000) and costs of prosecution, or by imprisonment at the discretion of the court. Each day upon which a willful violation occurs may be deemed a separate and additional violation.

Any person who violates the terms and conditions of a waste discharge permit shall incur, in addition to any other penalty as provided by law, a civil penalty in the amount of up to ten

thousand dollars ($10,000) for every such violation. Each and every such violation shall be a separate and distinct offense, and in case of a continuing violation, every day's continuance shall be deemed to be a separate and distinct violation.

G14. UPSET

Definition – "Upset" means an exceptional incident in which there is unintentional and temporary noncompliance with technology-based permit effluent limitations because of factors beyond the reasonable control of the Permittee. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate treatment facilities, lack of preventive maintenance, or careless or improper operation.

An upset constitutes an affirmative defense to an action brought for noncompliance with such technology-based permit effluent limitations if the requirements of the following paragraph are met.

A Permittee who wishes to establish the affirmative defense of upset must demonstrate, through properly signed, contemporaneous operating logs or other relevant evidence that:

1. an upset occurred and that the Permittee can identify the cause(s) of the upset;
2. the permitted facility was being properly operated at the time of the upset;
3. the Permittee submitted notice of the upset as required in Special Condition S5.F, and;
4. the Permittee complied with any remedial measures required under this permit.

In any enforcement proceeding, the Permittee seeking to establish the occurrence of an upset has the burden of proof.

G15. PROPERTY RIGHTS

This permit does not convey any property rights of any sort, or any exclusive privilege.

G16. DUTY TO COMPLY

The Permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of the Clean Water Act and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or denial of a permit renewal application.

G17. TOXIC POLLUTANTS

The Permittee must comply with effluent standards or prohibitions established under Section 307(a) of the Clean Water Act for toxic pollutants within the time provided in the regulations that establish those standards or prohibitions, even if this permit has not yet been modified to incorporate the requirement.

G18. PENALTIES FOR TAMPERING

The Clean Water Act provides that any person who falsifies, tampers with, or knowingly renders inaccurate any monitoring device or method required to be maintained under this permit shall, upon conviction, be punished by a fine of not more than $10,000 per violation, or by imprisonment for not more than two years per violation, or by both. If a conviction of a person is for a violation committed after a first conviction of such person under this condition, punishment shall be a fine of not more than $20,000 per day of violation, or imprisonment of not more than four (4) years, or both.

G19. REPORTING PLANNED CHANGES

The Permittee must, as soon as possible, give notice to Ecology of planned physical alterations, modifications or additions to the permitted construction activity. The Permittee should be aware that, depending on the nature and size of the changes to the original permit, a new public notice and other permit process requirements may be required. Changes in activities that require reporting to Ecology include those that will result in:

A. The permitted facility being determined to be a new source pursuant to 40 CFR 122.29(b).

B. A significant change in the nature or an increase in quantity of pollutants discharged, including but not limited to: a 20% or greater increase in acreage disturbed by construction activity.

C. A change in or addition of surface water(s) receiving stormwater or non-stormwater from the construction activity.

D. A change in the construction plans and/or activity that affects the Permittee's monitoring requirements in Special Condition S4.

Following such notice, permit coverage may be modified, or revoked and reissued pursuant to 40 CFR 122.62(a) to specify and limit any pollutants not previously limited. Until such modification is effective, any new or increased discharge in excess of permit limits or not specifically authorized by this permit constitutes a violation.

G20. REPORTING OTHER INFORMATION

Where the Permittee becomes aware that it failed to submit any relevant facts in a permit application, or submitted incorrect information in a permit application or in any report to Ecology, it must promptly submit such facts or information.

G21. REPORTING ANTICIPATED NON-COMPLIANCE

The Permittee must give advance notice to Ecology by submission of a new application or supplement thereto at least forty-five (45) days prior to commencement of such discharges, of any facility expansions, production increases, or other planned changes, such as process modifications, in the permitted facility or activity which may result in noncompliance with permit limits or conditions. Any maintenance of facilities, which might necessitate unavoidable interruption of operation and degradation of effluent quality, must be

scheduled during non-critical water quality periods and carried out in a manner approved by Ecology.

G22. REQUESTS TO BE EXCLUDED FROM COVERAGE UNDER THE PERMIT

Any discharger authorized by this permit may request to be excluded from coverage under the general permit by applying for an individual permit. The discharger must submit to the Director an application as described in WAC 173-220-040 or WAC 173-216-070, whichever is applicable, with reasons supporting the request. These reasons will fully document how an individual permit will apply to the applicant in a way that the general permit cannot. Ecology may make specific requests for information to support the request. The Director will either issue an individual permit or deny the request with a statement explaining the reason for the denial. When an individual permit is issued to a discharger otherwise subject to the construction stormwater general permit, the applicability of the construction stormwater general permit to that Permittee is automatically terminated on the effective date of the individual permit.

G23. APPEALS

A. The terms and conditions of this general permit, as they apply to the appropriate class of dischargers, are subject to appeal by any person within 30 days of issuance of this general permit, in accordance with Chapter 43.21B RCW, and Chapter 173-226 WAC.

B. The terms and conditions of this general permit, as they apply to an individual discharger, are appealable in accordance with Chapter 43.21B RCW within 30 days of the effective date of coverage of that discharger. Consideration of an appeal of general permit coverage of an individual discharger is limited to the general permit's applicability or non-applicability to that individual discharger.

C. The appeal of general permit coverage of an individual discharger does not affect any other dischargers covered under this general permit. If the terms and conditions of this general permit are found to be inapplicable to any individual discharger(s), the matter shall be remanded to Ecology for consideration of issuance of an individual permit or permits.

G24. SEVERABILITY

The provisions of this permit are severable, and if any provision of this permit, or application of any provision of this permit to any circumstance, is held invalid, the application of such provision to other circumstances, and the remainder of this permit shall not be affected thereby.

G25. BYPASS PROHIBITED

A. Bypass Procedures

Bypass, which is the intentional diversion of waste streams from any portion of a treatment facility, is prohibited for stormwater events below the design criteria for stormwater

management. Ecology may take enforcement action against a Permittee for bypass unless one of the following circumstances (1, 2, 3 or 4) is applicable.

1. Bypass of stormwater is consistent with the design criteria and part of an approved management practice in the applicable stormwater management manual.

2. Bypass for essential maintenance without the potential to cause violation of permit limits or conditions.

Bypass is authorized if it is for essential maintenance and does not have the potential to cause violations of limitations or other conditions of this permit, or adversely impact public health.

3. Bypass of stormwater is unavoidable, unanticipated, and results in noncompliance of this permit.

This bypass is permitted only if:

a. Bypass is unavoidable to prevent loss of life, personal injury, or severe property damage. “Severe property damage” means substantial physical damage to property, damage to the treatment facilities which would cause them to become inoperable, or substantial and permanent loss of natural resources which can reasonably be expected to occur in the absence of a bypass.

b. There are no feasible alternatives to the bypass, such as the use of auxiliary treatment facilities, retention of untreated wastes, maintenance during normal periods of equipment downtime (but not if adequate backup equipment should have been installed in the exercise of reasonable engineering judgment to prevent a bypass which occurred during normal periods of equipment downtime or preventative maintenance), or transport of untreated wastes to another treatment facility.

c. Ecology is properly notified of the bypass as required in Special Condition S5.F of this permit.

4. A planned action that would cause bypass of stormwater and has the potential to result in noncompliance of this permit during a storm event.

The Permittee must notify Ecology at least thirty (30) days before the planned date of bypass. The notice must contain:

a. A description of the bypass and its cause

b. An analysis of all known alternatives which would eliminate, reduce, or mitigate the need for bypassing.

c. A cost-effectiveness analysis of alternatives including comparative resource damage assessment.

d. The minimum and maximum duration of bypass under each alternative.

e. A recommendation as to the preferred alternative for conducting the bypass.

f. The projected date of bypass initiation.

g. A statement of compliance with SEPA.

h. A request for modification of water quality standards as provided for in WAC 173-201A-110, if an exceedance of any water quality standard is anticipated.

i. Steps taken or planned to reduce, eliminate, and prevent reoccurrence of the bypass.

5. For probable construction bypasses, the need to bypass is to be identified as early in the planning process as possible. The analysis required above must be considered during preparation of the Stormwater Pollution Prevention Plan (SWPPP) and must be included to the extent practical. In cases where the probable need to bypass is determined early, continued analysis is necessary up to and including the construction period in an effort to minimize or eliminate the bypass.

Ecology will consider the following before issuing an administrative order for this type of bypass:

a. If the bypass is necessary to perform construction or maintenance-related activities essential to meet the requirements of this permit.

b. If there are feasible alternatives to bypass, such as the use of auxiliary treatment facilities, retention of untreated wastes, stopping production, maintenance during normal periods of equipment down time, or transport of untreated wastes to another treatment facility.

c. If the bypass is planned and scheduled to minimize adverse effects on the public and the environment.

After consideration of the above and the adverse effects of the proposed bypass and any other relevant factors, Ecology will approve, conditionally approve, or deny the request. The public must be notified and given an opportunity to comment on bypass incidents of significant duration, to the extent feasible. Approval of a request to bypass will be by administrative order issued by Ecology under RCW 90.48.120.

B. Duty to Mitigate

The Permittee is required to take all reasonable steps to minimize or prevent any discharge or sludge use or disposal in violation of this permit that has a reasonable likelihood of adversely

affecting human health or the environment.

APPENDIX A – DEFINITIONS

AKART is an acronym for "**A**ll **K**nown, **A**vailable, and **R**easonable methods of prevention, control, and **T**reatment." AKART represents the most current methodology that can be reasonably required for preventing, controlling, or abating the pollutants and controlling pollution associated with a discharge.

Applicable TMDL means a TMDL for turbidity, fine sediment, low dissolved oxygen, high pH, or phosphorus, which was completed and approved by EPA before January 1, 2021, or before the date the operator's complete permit application is received by Ecology, whichever is later. TMDLs completed after a complete permit application is received by Ecology become applicable to the Permittee only if they are imposed through an administrative order by Ecology, or through a modification of permit coverage.

Applicant means an operator seeking coverage under this permit.

Benchmark means a pollutant concentration used as a permit threshold, below which a pollutant is considered unlikely to cause a water quality violation, and above which it may. When pollutant concentrations exceed benchmarks, corrective action requirements take effect. Benchmark values are not water quality standards and are not numeric effluent limitations; they are indicator values.

Best Management Practices (BMPs) means schedules of activities, prohibitions of practices, maintenance procedures, and other physical, structural and/or managerial practices to prevent or reduce the pollution of waters of the State. BMPs include treatment systems, operating procedures, and practices to control stormwater associated with construction activity, spillage or leaks, sludge or waste disposal, or drainage from raw material storage.

Buffer means an area designated by a local jurisdiction that is contiguous to and intended to protect a sensitive area.

Bypass means the intentional diversion of waste streams from any portion of a treatment facility.

Calendar Day means a period of 24 consecutive hours starting at 12:00 midnight and ending the following 12:00 midnight.

Calendar Week (same as **Week**) means a period of seven consecutive days starting at 12:01 a.m. (0:01 hours) on Sunday.

Certified Erosion and Sediment Control Lead (CESCL) means a person who has current certification through an approved erosion and sediment control training program that meets the minimum training standards established by Ecology (See BMP C160 in the SWMM).

Chemical Treatment means the addition of chemicals to stormwater and/or authorized non-stormwater prior to filtration and discharge to surface waters.

Clean Water Act (CWA) means the Federal Water Pollution Control Act enacted by Public Law 92-500, as amended by Public Laws 95-217, 95-576, 96-483, and 97-117; USC 1251 et seq.

Combined Sewer means a sewer which has been designed to serve as a sanitary sewer and a storm sewer, and into which inflow is allowed by local ordinance.

Common Plan of Development or Sale means a site where multiple separate and distinct construction activities may be taking place at different times on different schedules and/or by different contractors, but still under a single plan. Examples include: 1) phased projects and projects with multiple filings or lots, even if the separate phases or filings/lots will be constructed under separate contract or by separate owners (e.g., a development where lots are sold to separate builders); 2) a development plan that may be phased over multiple years, but is still under a consistent plan for long-term development; 3) projects in a contiguous area that may be unrelated but still under the same contract, such as construction of a building extension and a new parking lot at the same facility; and 4) linear projects such as roads, pipelines, or utilities. If the project is part of a common plan of development or sale, the disturbed area of the entire plan must be used in determining permit requirements.

Composite Sample means a mixture of grab samples collected at the same sampling point at different times, formed either by continuous sampling or by mixing discrete samples. May be "time-composite" (collected at constant time intervals) or "flow-proportional" (collected either as a constant sample volume at time intervals proportional to stream flow, or collected by increasing the volume of each aliquot as the flow increases while maintaining a constant time interval between the aliquots.

Concrete Wastewater means any water used in the production, pouring and/or clean-up of concrete or concrete products, and any water used to cut, grind, wash, or otherwise modify concrete or concrete products. Examples include water used for or resulting from concrete truck/mixer/pumper/tool/chute rinsing or washing, concrete saw cutting and surfacing (sawing, coring, grinding, roughening, hydro-demolition, bridge and road surfacing). When stormwater comingles with concrete wastewater, the resulting water is considered concrete wastewater and must be managed to prevent discharge to waters of the State, including groundwater.

Construction Activity means land disturbing operations including clearing, grading, excavation, and other soil disturbing activities which disturb the surface of the land. Such activities may include road construction, construction of residential houses, office buildings, or industrial buildings, site preparation, soil compaction, movement and stockpiling of topsoils, and demolition activity.

Construction Support Activity means on or off-site acreage that will be disturbed as a direct result of the construction project and will discharge stormwater. Construction-support activities may include, but are not limited to: equipment staging, borrow pit, material storage areas, dump areas, haul roads, construction roads, side-cast areas, on-site portable rock crusher, staging yards, parking areas, off-site construction support activities and all other soil disturbing activities.

Contaminant means any hazardous substance that does not occur naturally or occurs at greater than natural background levels. See definition of “hazardous substance” and WAC 173-340-200.

Contaminated soil means soil which contains contaminants, pollutants, or hazardous substances that do not occur naturally or occur at levels greater than natural background.

Contaminated groundwater means groundwater which contains contaminants, pollutants, or hazardous substances that do not occur naturally or occur at levels greater than natural background.

Date of Receipt – This is defined in RCW 43.21B.001(2) as five business days after the date of mailing; or the date of actual receipt, when the actual receipt date can be proven by a preponderance of the evidence. The recipient's sworn affidavit or declaration indicating the date of receipt, which is unchallenged by the agency, constitutes sufficient evidence of actual receipt. The date of actual receipt, however, may not exceed forty-five days from the date of mailing.

Days (compliance period interval) - When the compliance period is stated in days: (A) exclude the day of the event that triggers the period; (B) count every day, including intermediate Saturdays, Sundays, and legal holidays; and (C) include the last day of the period, but if the last day is a Saturday, Sunday, or legal holiday, the period continues to run until the end of the next day that is not a Saturday, Sunday, or legal holiday.

Demonstrably Equivalent means that the technical basis for the selection of all stormwater BMPs is documented within a SWPPP, including:

1. The method and reasons for choosing the stormwater BMPs selected.
2. The pollutant removal performance expected from the BMPs selected.
3. The technical basis supporting the performance claims for the BMPs selected, including any available data concerning field performance of the BMPs selected.
4. An assessment of how the selected BMPs will comply with state water quality standards.
5. An assessment of how the selected BMPs will satisfy both applicable federal technology-based treatment requirements and state requirements to use all known, available, and reasonable methods of prevention, control, and treatment (AKART).

Department means the Washington State Department of Ecology.

Detention means the temporary storage of stormwater to improve quality and/or to reduce the mass flow rate of discharge.

Dewatering means the act of pumping groundwater or stormwater away from an active construction site.

Director means the Director of the Washington State Department of Ecology or his/her authorized representative.

Discharger means an owner or operator of any facility or activity subject to regulation under Chapter 90.48 RCW or the Federal Clean Water Act.

Domestic Wastewater means water carrying human wastes, including kitchen, bath, and laundry wastes from residences, buildings, industrial establishments, or other places, together with such groundwater infiltration or surface waters as may be present.

Ecology means the Washington State Department of Ecology.

Engineered Soils means the use of soil amendments including, but not limited, to Portland cement treated base (CTB), cement kiln dust (CKD), or fly ash to achieve certain desirable soil characteristics.

Equivalent BMPs means operational, source control, treatment, or innovative BMPs which result in equal or better quality of stormwater discharge to surface water or to groundwater than BMPs selected from the SWMM.

Erosion means the wearing away of the land surface by running water, wind, ice, or other geological agents, including such processes as gravitational creep.

Erosion and Sediment Control BMPs means BMPs intended to prevent erosion and sedimentation, such as preserving natural vegetation, seeding, mulching and matting, plastic covering, filter fences, sediment traps, and ponds. Erosion and sediment control BMPs are synonymous with stabilization and structural BMPs.

Federal Operator is an entity that meets the definition of "Operator" in this permit and is either any department, agency or instrumentality of the executive, legislative, and judicial branches of the Federal government of the United States, or another entity, such as a private contractor, performing construction activity for any such department, agency, or instrumentality.

Final Stabilization (same as **fully stabilized** or **full stabilization**) means the completion of all soil disturbing activities at the site and the establishment of permanent vegetative cover, or equivalent permanent stabilization measures (such as pavement, riprap, gabions, or geotextiles) which will prevent erosion. See the applicable Stormwater Management Manual for more information on vegetative cover expectations and equivalent permanent stabilization measures.

Groundwater means water in a saturated zone or stratum beneath the land surface or a surface waterbody.

Groundwater Discharge Point (or Discharge to Groundwater) means the location where stormwater associated with construction activities enters a stormwater infiltration structure that is used, intended or designed to infiltrate water into the ground

Hazardous Substance means any dangerous or extremely hazardous waste as defined in RCW 70.105.010 (5) and (6), or any dangerous or extremely dangerous waste as designated by rule under chapter 70.105 RCW; any hazardous sub-stance as defined in RCW 70.105.010(14) or any hazardous substance as defined by rule under chapter 70.105 RCW; any substance that, on the effective date of this section, is a hazardous substance under section 101(14) of the federal cleanup law, 42U.S.C., Sec. 9601(14); petroleum or petroleum products; and any substance or category of substances, including solid waste decomposition products, determined by the director by rule to present a threat to human health or the environment if released into the environment. The term hazardous substance

does not include any of the following when contained in an underground storage tank from which there is not a release: crude oil or any fraction thereof or petroleum, if the tank is in compliance with all applicable federal, state, and local law.

Injection Well means a well that is used for the subsurface emplacement of fluids. (See Well.)

Jurisdiction means a political unit such as a city, town or county; incorporated for local self-government.

National Pollutant Discharge Elimination System (NPDES) means the national program for issuing, modifying, revoking and reissuing, terminating, monitoring, and enforcing permits, and imposing and enforcing pretreatment requirements, under sections 307, 402, 318, and 405 of the Federal Clean Water Act, for the discharge of pollutants to surface waters of the State from point sources. These permits are referred to as NPDES permits and, in Washington State, are administered by the Washington State Department of Ecology.

Notice of Intent (NOI) means the application for, or a request for coverage under this general permit pursuant to WAC 173-226-200.

Notice of Termination (NOT) means a request for termination of coverage under this general permit as specified by Special Condition S10 of this permit.

Operational Hours means when work is happening on site related to the project and project support activities, whether the activities are scheduled or unscheduled.

Operator means any party associated with a construction project that meets either of the following two criteria:

- The party has operational control over construction plans and specifications, including the ability to make modifications to those plans and specifications; or
- The party has day-to-day operational control of those activities at a project that are necessary to ensure compliance with a SWPPP for the site or other permit conditions (e.g., they are authorized to direct workers at a site to carry out activities required by the SWPPP or comply with other permit conditions).

Permittee means individual or entity that receives notice of coverage under this general permit.

pH means a liquid's measure of acidity or alkalinity. A pH of 7 is defined as neutral. Large variations above or below this value are considered harmful to most aquatic life.

pH Monitoring Period means the time period in which the pH of stormwater runoff from a site must be tested a minimum of once every seven days to determine if stormwater pH is between 6.5 and 8.5.

Point Source means any discernible, confined, and discrete conveyance, including but not limited to, any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, and container from which pollutants are or may be discharged to surface waters of the State. This term does not include return flows from irrigated agriculture. (See the Fact Sheet for further explanation)

Pollutant means dredged spoil, solid waste, incinerator residue, filter backwash, sewage, garbage, domestic sewage sludge (biosolids), munitions, chemical wastes, biological materials, radioactive materials, heat, wrecked or discarded equipment, rock, sand, cellar dirt, and industrial, municipal, and agricultural waste. This term does not include sewage from vessels within the meaning of section 312 of the CWA, nor does it include dredged or fill material discharged in accordance with a permit issued under section 404 of the CWA.

Pollution means contamination or other alteration of the physical, chemical, or biological properties of waters of the State; including change in temperature, taste, color, turbidity, or odor of the waters; or such discharge of any liquid, gaseous, solid, radioactive or other substance into any waters of the State as will or is likely to create a nuisance or render such waters harmful, detrimental or injurious to the public health, safety or welfare; or to domestic, commercial, industrial, agricultural, recreational, or other legitimate beneficial uses; or to livestock, wild animals, birds, fish or other aquatic life.

Process Wastewater means any non-stormwater which, during manufacturing or processing, comes into direct contact with or results from the production or use of any raw material, intermediate product, finished product, byproduct, or waste product. If stormwater commingles with process wastewater, the commingled water is considered process wastewater.

Receiving Water means the waterbody at the point of discharge. If the discharge is to a storm sewer system, either surface or subsurface, the receiving water is the waterbody to which the storm system discharges. Systems designed primarily for other purposes such as for groundwater drainage, redirecting stream natural flows, or for conveyance of irrigation water/return flows that coincidentally convey stormwater are considered the receiving water.

Representative means a stormwater or wastewater sample which represents the flow and characteristics of the discharge. Representative samples may be a grab sample, a time-proportionate composite sample, or a flow proportionate sample. Ecology's Construction Stormwater Monitoring Manual provides guidance on representative sampling.

Responsible Corporate Officer for the purpose of signatory authority means: (i) a president, secretary, treasurer, or vice-president of the corporation in charge of a principal business function, or any other person who performs similar policy- or decision-making functions for the corporation, or (ii) the manager of one or more manufacturing, production, or operating facilities, provided, the manager is authorized to make management decisions which govern the operation of the regulated facility including having the explicit or implicit duty of making major capital investment recommendations, and initiating and directing other comprehensive measures to assure long term environmental compliance with environmental laws and regulations; the manager can ensure that the necessary systems are established or actions taken to gather complete and accurate information for permit application requirements; and where authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures (40 CFR 122.22).

Sanitary Sewer means a sewer which is designed to convey domestic wastewater.

Sediment means the fragmented material that originates from the weathering and erosion of rocks or unconsolidated deposits, and is transported by, suspended in, or deposited by water.

Sedimentation means the depositing or formation of sediment.

Sensitive Area means a waterbody, wetland, stream, aquifer recharge area, or channel migration zone.

SEPA (State Environmental Policy Act) means the Washington State Law, RCW 43.21C.020, intended to prevent or eliminate damage to the environment.

Significant Amount means an amount of a pollutant in a discharge that is amenable to available and reasonable methods of prevention or treatment; or an amount of a pollutant that has a reasonable potential to cause a violation of surface or groundwater quality or sediment management standards.

Significant Concrete Work means greater than 1000 cubic yards placed or poured concrete or recycled concrete used over the life of a project.

Significant Contributor of Pollutants means a facility determined by Ecology to be a contributor of a significant amount(s) of a pollutant(s) to waters of the State of Washington.

Site means the land or water area where any "facility or activity" is physically located or conducted.

Source Control BMPs means physical, structural or mechanical devices or facilities that are intended to prevent pollutants from entering stormwater. A few examples of source control BMPs are erosion control practices, maintenance of stormwater facilities, constructing roofs over storage and working areas, and directing wash water and similar discharges to the sanitary sewer or a dead-end sump.

Stabilization means the application of appropriate BMPs to prevent the erosion of soils, such as, temporary and permanent seeding, vegetative covers, mulching and matting, plastic covering and sodding. See also the definition of Erosion and Sediment Control BMPs.

Storm Drain means any drain which drains directly into a storm sewer system, usually found along roadways or in parking lots.

Storm Sewer System means a means a conveyance, or system of conveyances (including roads with drainage systems, municipal streets, catch basins, curbs, gutters, ditches, manmade channels, or storm drains designed or used for collecting or conveying stormwater. This does not include systems which are part of a combined sewer or Publicly Owned Treatment Works (POTW), as defined at 40 CFR 122.2.

Stormwater means that portion of precipitation that does not naturally percolate into the ground or evaporate, but flows via overland flow, interflow, pipes, and other features of a stormwater drainage system into a defined surface waterbody, or a constructed infiltration facility.

Stormwater Management Manual (SWMM) or Manual means the technical Manual published by Ecology for use by local governments that contain descriptions of and design

criteria for BMPs to prevent, control, or treat pollutants in stormwater. There are two manuals, one for Eastern Washington and one for Western Washington.

Stormwater Pollution Prevention Plan (SWPPP) means a documented plan to implement measures to identify, prevent, and control the contamination of point source discharges of stormwater.

Surface Waters of the State includes lakes, rivers, ponds, streams, inland waters, salt waters, and all other surfac**e** waters and water courses within the jurisdiction of the state of Washington.

Temporary Stabilization means the exposed ground surface has been covered with appropriate materials to provide temporary stabilization of the surface from water or wind erosion. Materials include, but are not limited to, mulch, riprap, erosion control mats or blankets and temporary cover crops. Seeding alone is not considered stabilization. Temporary stabilization is not a substitute for the more permanent "final stabilization."

Total Maximum Daily Load (TMDL) means a calculation of the maximum amount of a pollutant that a waterbody can receive and still meet state water quality standards. Percentages of the total maximum daily load are allocated to the various pollutant sources. A TMDL is the sum of the allowable loads of a single pollutant from all contributing point and nonpoint sources. The TMDL calculations must include a "margin of safety" to ensure that the waterbody can be protected in case there are unforeseen events or unknown sources of the pollutant. The calculation must also account for seasonable variation in water quality.

Transfer of Coverage (TOC) means a request for transfer of coverage under this general permit as specified by Special Condition S2.A of this permit.

Treatment BMPs means BMPs that are intended to remove pollutants from stormwater. A few examples of treatment BMPs are detention ponds, oil/water separators, biofiltration, and constructed wetlands.

Transparency means a measurement of water clarity in centimeters (cm), using a 60 cm transparency tube. The transparency tube is used to estimate the relative clarity or transparency of water by noting the depth at which a black and white Secchi disc becomes visible when water is released from a value in the bottom of the tube. A transparency tube is sometimes referred to as a "turbidity tube."

Turbidity means the clarity of water expressed as nephelometric turbidity units (NTUs) and measured with a calibrated turbidimeter.

Uncontaminated means free from any contaminant. See definition of "contaminant" and WAC 173-340-200.

Upset means an exceptional incident in which there is unintentional and temporary noncompliance with technology-based permit effluent limitations because of factors beyond the reasonable control of the Permittee. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate treatment facilities, lack of preventive maintenance, or careless or improper operation.

Waste Load Allocation (WLA) means the portion of a receiving water's loading capacity that is allocated to one of its existing or future point sources of pollution. WLAs constitute a type of water quality based effluent limitation (40 CFR 130.2[h]).

Water-Only Based Shaft Drilling is a shaft drilling process that uses water only and no additives are involved in the drilling of shafts for construction of building, road, or bridge foundations.

Water Quality means the chemical, physical, and biological characteristics of water, usually with respect to its suitability for a particular purpose.

Waters of the State includes those waters as defined as "waters of the United States" in 40 CFR Subpart 122.2 within the geographic boundaries of Washington State and "waters of the State" as defined in Chapter 90.48 RCW, which include lakes, rivers, ponds, streams, inland waters, underground waters, salt waters, and all other surface waters and water courses within the jurisdiction of the state of Washington.

Well means a bored, drilled or driven shaft, or dug hole whose depth is greater than the largest surface dimension. (See Injection Well.)

Wheel Wash Wastewater means any water used in, or resulting from the operation of, a tire bath or wheel wash (BMP C106: Wheel Wash), or other structure or practice that uses water to physically remove mud and debris from vehicles leaving a construction site and prevent track-out onto roads. When stormwater comingles with wheel wash wastewater, the resulting water is considered wheel wash wastewater and must be managed according to Special Condition S9.D.9.

APPENDIX B – ACRONYMS

AKART	All Known, Available, and Reasonable Methods of Prevention, Control, and Treatment
BMP	Best Management Practice
CESCL	Certified Erosion and Sediment Control Lead
CFR	Code of Federal Regulations
CKD	Cement Kiln Dust
Cm	Centimeters
CPD	Common Plan of Development
CTB	Cement-Treated Base
CWA	Clean Water Act
DMR	Discharge Monitoring Report
EPA	Environmental Protection Agency
ERTS	Environmental Report Tracking System
ESC	Erosion and Sediment Control
FR	Federal Register
LID	Low Impact Development
NOI	Notice of Intent
NOT	Notice of Termination
NPDES	National Pollutant Discharge Elimination System
NTU	Nephelometric Turbidity Unit
RCW	Revised Code of Washington
SEPA	State Environmental Policy Act
SWMM	Stormwater Management Manual
SWPPP	Stormwater Pollution Prevention Plan
TMDL	Total Maximum Daily Load
UIC	Underground Injection Control
USC	United States Code
USEPA	United States Environmental Protection Agency
WAC	Washington Administrative Code
WQ	Water Quality
WWHM	Western Washington Hydrology Model

APPENDIX E

NPDES Construction Stormwater General Permit Transfer of Coverage

Instructions for Transfer of Coverage

Construction Stormwater General Permit

DEPARTMENT OF ECOLOGY
State of Washington

Instructions

This form is used to process two types of permit transfers: 1) Complete Transfer, or 2) Partial Transfer. Determine which type of transfer applies to your situation before filling out this form.

1. Complete Transfer: The original permittee has sold, or otherwise released control of the entire site to another party.

Required Paperwork for Complete Transfer:

- Either the current permittee, or the new permittee(s), must submit a complete and accurate Transfer of Coverage form to Ecology for each new party. The form must be signed by the current permittee ***and*** the new permittee.

2. Partial Transfer: The original permittee retains control over some portion of the site after selling or releasing control over a portion of the site.

Required Paperwork for Partial Transfer

- Either the current permittee or the new permittee(s) must submit a complete and accurate Transfer of Coverage Form for each new operator to Ecology. The form must be signed by the current permittee and the new permittee.
- For partial transfers, once all transfers are submitted, the original permittee should submit the Notice of Termination only if the portion(s) they still own or control have undergone final stabilization and meet the criteria for termination.

For Your Information

- When this form is 1) completed, 2) signed by the current and new permittee, and 3) submitted to Ecology, permit transfers are effective on the date specified at the top of page 1 (unless Ecology notifies the current permittee and new permittee of its intention to revoke coverage under the General Permit or if Ecology sends notice that the application is incomplete). If no date for the transfer of coverage is specified, Ecology will use the date of the last signature.
- The new permittee should keep a copy of the signed Transfer of Coverage form (which serves as proof of permit coverage) until Ecology sends documentation in the mail.
- Following the transfer, the new permittee must either: (1) use the Stormwater Pollution Prevention Plan (SWPPP) developed by the original operator, and modified as necessary, or (2) develop and use a new SWPPP that meets the requirements of the Construction Stormwater General Permit.
- For projects for which the original permittee has completed a Proposed New Discharge to an Impaired Waterbody Form (ECY 070-399), or for projects that are operating on sites with soil or groundwater contamination: Upon completion of the Transfer of Coverage form, the new permittee will adopt any special provisions made to protect water quality for sites that have existing contamination or that discharge to an impaired waterbody.

To request ADA accommodation including materials in a format for the visually impaired, call the Water Quality Program at 360-407-6600 or visit https://ecology.wa.gov/accessibility. *People with impaired hearing may call Washington Relay Service at 711. People with speech disability may call 877-833-6341.*

This page is intentionally left blank

DEPARTMENT OF ECOLOGY
State of Washington

Transfer of Coverage

Permit # WAR 316073

Construction Stormwater General Permit

This form transfers permit coverage for all, or a portion of a site to one or more new operators.

Type of permit transfer (check one): ☐ Partial transfer (complete the Partial Transfer acreage below) ■ Complete transfer

Specific date that permit responsibility, coverage, and liability is transferred to new operator: _____
**If no date is indicated Ecology will determine the date of transfer.*

Please see instructions for details on type of transfer.

For PARTIAL TRANSFERS indicate the acreage remaining under your operational control:
- List *total size of project/site* remaining under your operational control following the partial transfer: _____ acres.
- List *total area of soil disturbance* remaining under your operational control following the partial transfer: _____ acres.
- Submitting this form meets the requirement to submit an updated NOI (General Permit Condition G9)

Current Operator/Permittee Information

Current Operator/Permittee Name: Spencer Beier		Company: WSDOT		
Business Phone: 360-826-0186	Ext:	Mailing Address: 1109 Hickox Rd		
Cell Phone:	Fax (optional):			
Email: spencer.beier@wsdot.wa.gov		City: Mount Vernon	State: WA	Zip+4: 98274

Signature* (see signatory requirements in Section VIII): Title: Project Engineer

Date:

New Operator/Permittee Information
(the remainder of this form applies to the new Operator/Permittee)

I. New Operator/Permittee (Party with operational control over plans and specifications or day-to-day operational control of activities which ensure compliance with Stormwater Pollution Prevention Plan (SWPPP) and permit conditions. Ecology will send correspondence and permit fee invoices to the permittee on record.)

Name:		Company:		
Business Phone:	Ext:	Unified Business Identifier (UBI): *(UBI is a nine-digit number used to identify a business entity. Write "none" if you do not have a UBI number.)*		
Cell Phone (Optional):	Fax (Optional):	E-mail:		
Mailing Address:		City:	State:	Zip + 4:

II. Property Owner (The party listed on the County Assessor's records as owner and taxpayer of the parcel[s] for which permit coverage is requested. Ecology will *not* send correspondence and permit fee invoices to the Property Owner. The Property Owner information will be used for emergency contact purposes.)

Name:		Company:		
Business Phone:	Ext:	Unified Business Identifier (UBI): *(UBI is a nine-digit number used to identify a business entity. Write "none" if you do not have a UBI number.)*		
Cell Phone (Optional):	Fax (Optional):	E-mail:		
Mailing Address:		City:	State:	Zip + 4:

III. On-Site Contact Person(s) (Typically the Certified Erosion and Sediment Control Lead or Operator/Permittee)

Name:		Company:		
Business Phone:	Ext:	Mailing Address:		
Cell Phone:	Fax(Optional):	City:	State:	Zip+4:
Email:				

IV. Site/Project Information

Site or Project Name: R 544 Nooksack Overflow Permanent Emergency Repair

Street Address or Location Description (*If the site lacks a street address, list its specific location. For example, Intersection of Highway 61 and 34.)*

State Route 544 between milepost 7.54 to 7.70 just south of the Nooksack River Bridge in Everson, WA

Parcel ID#: _____ *(Optional)*

Type of Construction Activity (*check all that apply*):
- ☐ Residential
- ☐ Commercial
- ☐ Industrial
- ■ Highway or Road (city ,county, state)
- ■ Utilities (specify): _____.
- ☐ Other (specify):_____.

Site Acreage
Total size of your site/project (that you own/control): 4.45 acres. *(Note: 1 acre = 43,560 sq. ft.*)

Total area of soil disturbance for your site/project over the life of the project: 1.9 acres. Include grading, equipment staging, excavation, borrow pit, material storage areas, dump areas, haul roads, side-cast areas, off-site construction support areas, and all other soil disturbance acreage associated with the project. (Note: 1 acre = 43,560 sq. ft.)

City (or nearest city): Everson	Zip Code: 98247	Estimated project start-up date (mm/dd/yy): 4/1/27
County: Whatcom		Estimated project completion date (mm/dd/yy): 10/31/28

Record the latitude and longitude of the *main entrance* to the site or the approximate center of site.

Latitude: 48.917179 °N Longitude: -122.350163 °W

V. Existing Site Conditions

1. Are you aware of contaminated soils present on the site? ☐ Yes ☐ No

2. Are you aware of groundwater contamination located within the site boundary? ☐ Yes ☐ No

3. If you answered yes to questions 1 or 2, will any contaminated soils be disturbed or will any contaminated groundwater be discharged due to the proposed construction activity? ☐ Yes ☐ No

("Contaminated" and "contamination" here mean containing any hazardous substance (as defined in WAC 173-340-200) that does not occur naturally or occurs at greater than natural background levels.)

If you answered yes to Question 3, please provide detailed information with the NOI (as known and readily available) on the natures and extent of the contamination (concentrations, locations, and depth), as well as pollution prevention and/or treatment Best Management Practices (BMPs) proposed to control the discharge of soil and/or groundwater contaminants in stormwater. This should include information that would be included in related portions of the Stormwater Pollution Prevention Plan (SWPPP) that describe how contaminated and potentially contaminated construction stormwater and dewatering water will be managed.

VI. WQWebDMR (Electronic Discharge Monitoring Reporting)

You must submit monthly discharge monitoring reports using Ecology's WQWebDMR system. To sign up for WQWebDMR, or to register a new site, go to https://www.ecology.wa.gov/Regulations-Permits/Guidance-technical-assistance/Water-quality-permits-guidance/WQWebPortal-guidance. If you are unable to submit your DMRs electronically, you may contact Ecology to request a waiver. Ecology will generally only grant waiver requests to those permittees without internet access. Only a permittee or representative, designated in writing, may request access to or a waiver from WQWebDMR. To have the ability to use the system immediately, you must submit the Electronic Signature Agreement with your transfer of coverage form. If you have questions on this process, contact Ecology's WQWebDMR staff at WebDMRPortal@ecy.wa.gov or 800/633-6193 or 360-407-7097 (local). Note: DMRs are optional for permitted sites under 1 acre that do not discharge to impaired waterbodies.

VII. Discharge/Receiving Water Information

Indicate whether your site's stormwater and/or dewatering water could enter surface waters, ***directly and/or indirectly***:

☒ Water will discharge directly or indirectly (through a storm drain system or roadside ditch) into one or more surface waterbodies (wetlands, creeks, lakes, and all other surface waters and water courses).

If your discharge is to a storm sewer system, provide the name of the operator of the storm sewer system:

(e.g., City of Tacoma): _____

☐ Water will discharge to ground with 100% infiltration, with no potential to reach surface waters under any conditions.

If your project includes dewatering, you must include dewatering plans and discharge locations in your site Stormwater Pollution Prevention Plan.

Location of Outfall into Surface Waterbody

Enter the outfall identifier code, waterbody name, and latitude/longitude of the point(s) where the site has the potential to discharge into a waterbody (the outfall). Enter all locations. See illustration of Surface Waterbody Outfall locations at the end of this form.

- Include the names and locations of both direct and indirect discharges to surface waterbodies, even if the risk of discharge is low or limited to periods of extreme weather. Attach a separate list if necessary.
- Give each point a unique 1-4 digit alpha numeric code. This code will be used for identifying these points in WQWebDMR.
- Some large construction projects (for example, subdivisions, roads, or pipelines) may discharge into several waterbodies.
- If the creek or tributary is unnamed, use a format such as "unnamed tributary to Deschutes River."
- If the site discharges to a stormwater conveyance system that in turn flows to a surface waterbody, include the surface waterbody name and location.

Outfall Identifier Code. These cannot be symbols. (Maximum of 4 characters).	Surface Waterbody Name at the Outfall	Latitude Decimal Degrees	Longitude Decimal Degrees
Example: 001A	Example: Puget Sound	47.5289247° N	-122.3123550° W
1	Nooksack River	48.918046 ° N	-122.351193 ° W
2	Nooksack River	48.917736 ° N	-122.349844 ° W
		° N	° W

If your site discharges to a waterbody that is on the impaired waterbodies list (e.g., 303[d] list) for turbidity, fine sediment, high pH, or phosphorus, Ecology will require additional documentation before issuing permit coverage and these sites will be subject to additional sampling and numeric effluent limits (per Permit Condition S8). Ecology will notify you if any additional sampling requirements apply. Information on impaired waterbodies is available online at: https://www.ecology.wa.gov/Water-Shorelines/Water-quality/Water-improvement/Assessment-of-state-waters-303d.

Before signing, please use the following checklist to ensure this form is complete:

☐ All spaces on this form have been completed. (Attach additional sheets if necessary)

☐ The transfer form has been signed by both the current permittee (see Page 1) *and* the new permittee (see Section VIII below).

☐ The date permit responsibility was transferred is specified. (See Page 1)

☐ New Operator/Permittee: Before you submit this form to Ecology, please retain a copy for your records – this will serve as proof of permit coverage until documentation arrives from Ecology.

☐ For partial transfers: If the original permittee no longer owns or controls any portions of the site that meet the criteria for termination, the original permittee must submit a Notice of Termination (NOT) to terminate permit coverage. See the CSWGP website for a link to the NOT form: www.ecology.wa.gov/constructionstormwaterpermit.

☐ For sites with contaminated soils/groundwater or a new discharger to an impaired waterbody: Any special provisions to protect water quality put in place at the time of initial coverage have been reviewed and adopted by the new permittee.

Administrative Order Docket No. _____

VIII. Certification of New Permittee

"I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system or those directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

Printed/Typed Name	Company (operator/permittee only)	Title
Signature of New Operator/Permittee		*Date*

Signature of Operator/Permittee requirements:

A. For a corporation: By a responsible corporate officer.
B. For a partnership or sole proprietorship: By a general partner or the proprietor, respectively.
C. For a municipality, state, federal, or other public facility: By either a principal executive officer or ranking elected official.

Please sign and return this ORIGINAL document to the following address:

Department of Ecology – Construction Stormwater
PO Box 47696
Olympia, WA 98504-7696


If you have questions about this form, contact the following Ecology staff:

Location	Contact Name	Phone	E-mail
City of Seattle, and Kitsap, Pierce, and Thurston counties	Josh Klimek	360-407-7451	josh.klimek@ecy.wa.gov
Island, King, and San Juan counties	RaChelle Stane	360-407-6556	rachelle.stane@ecy.wa.gov
Adams, Asotin, Columbia, Ferry, Franklin, Garfield, Grant, Lincoln, Pend Oreille, Skagit, Snohomish, Spokane, Stevens, Walla, Whatcom, and Whitman counties.	Shawn Hopkins	360-407-6442	shawn.hopkins@ecy.wa.gov
Benton, Chelan, Clallam, Clark, Cowlitz, Douglas, Grays Harbor, Jefferson, Kittitas, Klickitat, Lewis, Mason, Okanogan, Pacific, Skamania, Wahkiakum, and Yakima counties.	Joyce Smith	360-407-6858	joyce.smith@ecy.wa.gov

You must submit monthly discharge monitoring reports using Ecology's WQWebDMR system. To sign up for WQWebDMR, or to register a new site, go to www.ecology.wa.gov/Regulations-Permits/Guidance-technical-assistance/Water-quality-permits-guidance/WQWebPortal-guidance. If you are unable to submit your DMRs electronically, you may contact Ecology to request a waiver. Ecology will generally only grant waiver requests to those permittees without internet access. Only a permittee or representative, designated in writing, may request access to or a waiver from WQWebDMR. To have the ability to use the system immediately, you must submit the Electronic Signature Agreement with your application.

If you have questions on this process, contact Ecology's WQWebDMR staff at WQWebPortal@ecy.wa.gov or 800-633-6193 or 360-407-7097 (local).

Example Surface Waterbody Outfall location for Section VII:

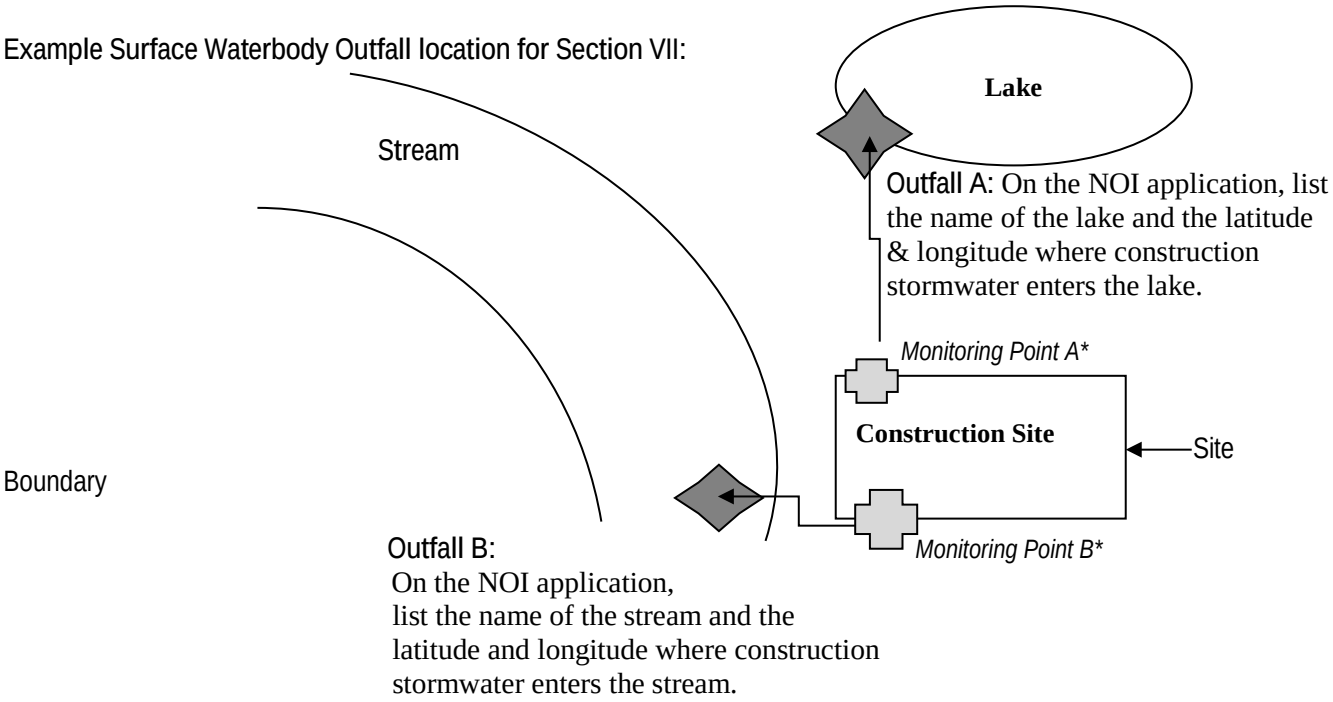

*Note: The monitoring points are for illustration only and are not required on this Notice of Intent application form. Monitoring point information will be entered on the monthly discharge monitoring report as required for active permits.

To request ADA accommodation including materials in a format for the visually impaired, call the Water Quality Program at 360-407-6600 or visit https://ecology.wa.gov/accessibility. People with impaired hearing may call Washington Relay Service at 711. People with speech disability may call TYY at 877-833-6341.

APPENDIX F

Department of Fish and Wildlife
Hydraulic Project Approval

HYDRAULIC PROJECT APPROVAL

Washington Department of
Fish and Wildlife
PO Box 43234
Olympia, WA 98504-3234
(360) 902-2200

Issue Date: 10/07/2026
Project End Date: 12/31/2028

Permit Type: HPA - Standard
Permit Number: 2026-4-698+02
Application ID: 0049834

PERMITTEE	AUTHORIZED AGENT
ATTENTION Mark Stamey 1019 Andis Rd Burlington, Washington 98233	ATTENTION Joelle Cihak 1019 Andis Rd Burlington, Washington 98233

Project Name: SR 544 Nooksack River Overflow Culvert - ER Permanent Repair

Project Description: WSDOT proposes to replace the existing 37.9-foot span (width along bottom of arch at widest point), 15.6-foot rise (height at highest point of the arched span), 102.7-foot long (measured along approximate flow centerline alignment) corrugated metal arched overflow structure (AOS) within the overflow channel under SR 544 with a 123-foot long single-span bridge structure to repair the structure damaged by the November 2021 flood event. There will be 18,052 square feet (0.41 acres) of temporary riparian impacts and no permanent riparian impacts. The project will remove 5,355 square feet of existing vegetated unburied riprap and restore the area with native vegetation. Scour countermeasures will include buried sheet piles at the toe of the slope in the proposed overflow channel and buried riprap, parallel to the channel side slopes, to protect the new bridge abutments. Buried sheet piles and riprap will be covered with streambed substrate as well as planted with native species and are not within the proposed channel bed so potential impacts to habitat functionality will be minimal. There will be no new pollution-generating impervious surfaces (PGIS). Proposed PGIS to be replaced is currently draining to a bioswale in existing condition and will continue to drain to the bioswale in the proposed condition. No stormwater retrofit is proposed. A detour is proposed that will use SR 9, SR 546, and SR 539. The detour will be in use for a maximum of 10 days for all vehicles and will remain in place for 5-6 months for larger trucks over 45 feet while smaller vehicles use the temporary bypass. Additionally, there will also be a temporary pedestrian bypass to allow continued use of the Bay to Baker Trail during construction. WDFW determined the overflow channel is not fish bearing and may only provide temporary refugia during high flow events. Therefore, WDFW approved in-water work outside of the published IWWW (July 15 September 30) during low flow periods. There will be two in-water work seasons during this low flow period. The overflow channel will be stabilized, and there will be no equipment below the OHWM including block nets and cofferdams outside of the low flow period. Best management practices (BMPs) including high visibility silt fences (HVSFs) will be temporarily installed along the OHWM during upland work outside of the low flow period to protect the overflow channel from construction sedimentation.

PROVISIONS

AUTHORIZED WORK TIMES

1. Work below the ordinary high water line (OHWL) must only occur between July 15 and September 30 of any permitted year. With permission by the Area Habitat Biologist to ensure conditions are conducive for work, work outside the work window, in the overflow channel, may be done during low flow periods as long as the work is outside the wetted permitter.

PROJECT APPROVALS

2. Work must be accomplished per the plans and specifications submitted with the application and approved by the Washington Department of Fish and Wildlife, entitled "ProjectPlanDrawings_20260514_PmtDrawings_Nooksack", sheets 1-12 of 12, dated May 14, 2026. except as modified by this Hydraulic Project Approval (HPA). You must have a copy of these plans and this HPA available on site during all phases of the project construction.

NOTIFICATION REQUIREMENTS

3. FISH KILL/WATER QUALITY PROBLEM NOTIFICATION: If a fish kill occurs or fish are observed in distress at the job site, immediately stop all activities causing harm. Immediately notify the Washington Department of Fish and Wildlife of the problem. If the likely cause of the fish kill or fish distress is related to water quality, also notify the Washington Emergency Management Division at 1-800-258-5990. Activities related to the fish kill or fish distress must not resume until the Washington Department of Fish and Wildlife gives approval. The Washington Department of Fish and Wildlife may require additional measures to mitigate impacts.
4. You or your agent must contact the Washington Department of Fish and Wildlife by e-mail at HPAapplications@dfw.wa.gov or mail to Post Office Box 43234, Olympia, Washington 98504-3234 at least three business days before starting work, one day before removing the temporary bypass, and again within seven days after completing the work. The notification must include the permittee's name, project location, starting date for work or date the work was completed, and the permit number. The Washington Department of Fish and Wildlife may conduct inspections during and after construction; however, the Washington Department of Fish and Wildlife will notify you or your agent before conducting the inspection.

REPORTING REQUIREMENTS

5. PHOTOGRAPHS: You, your agent, or contractor must take photographs of the job site before the work begins and after the work is completed. You must upload the photographs to the post-permit requirement page in the Aquatic Protection Permitting System (APPS) or mail them to Washington Department of Fish and Wildlife at Post Office Box 43234, Olympia, Washington 98504-3234 within 30-days after the work is completed.

INVASIVE SPECIES CONTROL

6. Follow Method 1 for low-risk locations (i.e., clean/drain/rinse/dry). Thoroughly remove visible dirt and debris from all equipment and gear—including vessels, boots, waders, drive mechanisms, wheels, tires, tracks, buckets, and undercarriage—before arriving at and leaving the job site to prevent the transport and introduction of aquatic invasive species. For contaminated or high-risk sites, refer to the Method 2 Decontamination protocol. Clean, rinse, and dry all decontamination equipment used and properly dispose of any water and chemicals used for cleaning. For additional decontamination details, including specific protocols for freshwater, marine, and estuarine environments, refer to the Washington Department of Fish and Wildlife Invasive Species Management Protocols, available online at https://wdfw.wa.gov/species-habitats/invasive/prevention/clean-drain-dry#decontamination

STAGING, JOB SITE ACCESS, AND EQUIPMENT

7. Establish staging areas (used for activities such as equipment storage, vehicle storage, fueling, servicing, and hazardous material storage) in a location and manner that will prevent contaminants such as petroleum products, hydraulic fluid, fresh concrete, sediments, sediment-laden water, chemicals, or any other toxic or harmful materials from entering waters of the state.
8. Equipment used in or near water must use environmentally acceptable lubricants composed of biodegradable base oils. These are vegetable oils, synthetic esters, and polyalkylene glycols.
9. Equipment used for this project may operate waterward of the ordinary high water line, provided the drive mechanisms (wheels, tracks, tires, etc.) do not enter or operate waterward of the ordinary high water line.
10. Check equipment daily for leaks and complete any required repairs in an upland location before using the equipment in or near the water.
11. Clearly mark boundaries to establish the limit of work associated with site access and construction.
12. Limit the use of equipment waterward of the ordinary high water line to that necessary to gain position for the work.
13. If wet or muddy conditions exist, in or near a riparian zone or wetland area, use equipment that reduces ground pressure.
14. Confine the use of equipment to the specific access and work corridor shown in the approved plans.

15. If equipment must cross the creek in the most direct route and in a manner that does the least damage to the bed, streambank and streambank vegetation. If needed, you must place planks, matting or other suitable clean temporary material on the bank when driving equipment into and out of the channel to prevent damage.
16. Use existing roadways or travel paths whenever possible.

SEDIMENT, EROSION, AND POLLUTION CONTAINMENT

17. Protect all disturbed areas from erosion. Maintain erosion and sediment control until all work and cleanup of the job site is complete.
18. All erosion control materials that will remain onsite must be composed of 100% biodegradable materials.
19. Straw used for erosion and sediment control, must be certified free of noxious weeds and their seeds.
20. Do not stockpile construction material waterward of the ordinary high water line.
21. If excavation or other construction activities take place waterward of the ordinary high water line, isolate the work area from the stream flow (if present) by using a cofferdam, bypass, or similar structure.
22. If flow conditions arise that will result in erosion or siltation of waters of the state, stop all hydraulic project activities except those needed to control erosion and siltation.
23. Install and maintain curbs or wheel guards to prevent aggregate or earth-type paving material from entering the stream.
24. Prevent project contaminants, such as petroleum products, hydraulic fluid, fresh concrete, sediments, sediment-laden water, chemicals, or any other toxic or harmful materials, from entering or leaching into waters of the state.
25. Remove soil or debris from the drive mechanisms (wheels, tires, tracks, etc.) and undercarriage of equipment prior to operating the equipment waterward of the ordinary high water line.
26. Route the construction water (wastewater) from the project to an upland area above the limits of anticipated floodwater. Remove fine sediment and other contaminants before discharging the construction water to waters of the state.
27. Store all construction and deconstruction material in a location and manner that will prevent contaminants such as petroleum products, hydraulic fluid, fresh cement, sediments, sediment-laden water, chemicals, or any other toxic or harmful materials from entering waters of the state.
28. Deposit waste material from the project, such as construction debris, silt, excess dirt, or overburden, in an upland area above the limits of anticipated floodwater unless the material is approved by the Washington Department of Fish and Wildlife for reuse in the project.
29. All equipment fueling and servicing must be done so that petroleum products do not get into the body of water or frequent scour zone. If a petroleum sheen or spill is observed, you must immediately stop work, remove the equipment from the body of water, and contact the Washington Military Department Emergency Management Division (1-800-258-5990). You may not return your equipment to the water until the problem is corrected. You must store fuel and lubricants outside the frequent scour zone, and in the shade when possible.

CONSTRUCTION MATERIALS

30. To prevent leaching, construct forms to contain any wet concrete. Place impervious material over any exposed wet concrete that will come in contact with waters of the state. Forms and impervious materials must remain in place until the concrete is cured.
31. Use material for the approaches that is structurally stable and that will not harm fish life if it erodes into the water.
32. Rock must be large enough and installed to withstand the 100-year peak flow.
33. Do not use wood treated with oil-type preservative (creosote, pentachlorophenol) in any hydraulic project. Wood treated with waterborne preservative chemicals (ACZA, ACQ) may be used if the Western Wood Preservers Institute has approved the waterborne chemical for use in the aquatic environment. The manufacturer must follow the Western Wood Preservers Institute guidelines and the best management practices to minimize the preservative migrating from treated wood into aquatic environments. To minimize leaching, wood treated with a preservative by someone other than a manufacturer must follow the field treating guidelines. These guidelines and best management practices are available at https://preservedwood.org.

HABITAT FEATURES

34. Retain all natural habitat features on the bed or banks including large woody material and boulders. You may move these natural habitat features during construction but you must place them near the pre-project location before leaving the job site.
35. Limit the removal of native bankline vegetation to the minimum amount needed to construct the project.

IN-WATER WORK AREA ISOLATION

36. Use the least-impacting feasible method to temporarily bypass water from the work area. Consider the physical characteristics of the site and the anticipated volume of water flowing through the work area.
37. Design the temporary bypass to minimize the length of the dewatered stream channel.
38. During all phases of bypass installation and decommissioning, maintain flows downstream of the project site to ensure survival of all downstream fish.
39. If the bypass is a pumped diversion, once started it must run continuously until it is no longer necessary to bypass flows. This requires back-up pumps on-site and twenty-four-hour monitoring for overnight operation.
40. If the diversion inlet is a gravity diversion that provides fish passage, place the diversion outlet where it facilitates gradual and safe reentry of fish into the stream channel.
41. Install a cofferdam or similar device at the upstream and downstream end of the bypass to prevent backwater from entering the work area.
42. Install the cofferdam, dike, or similar structure and remove fish prior to the start of other work in the wetted perimeter.
43. Isolate fish from the work area by using either a total or partial bypass to reroute the stream through a temporary channel or pipe.
44. Isolate pump hose intakes with block nets so that fish cannot get near the intake.
45. Maintain water quality when installing and removing the cofferdam, dike or similar structure.
46. Provide fish passage during times of the year when fish are expected to migrate.
47. Remove fish screens on dewatering pumps in the isolated work area only after all fish are safe and excluded from the work area.
48. Return diverted water to the channel immediately downstream of the work area. Dissipate flow energy from the diversion to prevent scour or erosion of the channel and bank.
49. Sequence the work to minimize the duration of dewatering.
50. The fish screen must remain in place whenever water is withdrawn from the stream through the pump intake.
51. Use a cofferdam, dike, or similar structure to exclude water from the work area.
52. The hydraulic capacity of the stream bypass must be sufficient to accommodate expected flows during the period of operation.
53. If the diversion inlet is a pump diversion in a fish-bearing stream, the pump intake structure must have a fish screen installed, operated, and maintained in accordance with RCW 77.57.010 and 77.57.070. Screen the pump intake with one of the following:

    a. Perforated plate: 0.094 inch (maximum opening diameter);
    b. Profile bar: 0.069 inch (maximum width opening); or
    c. Woven wire: 0.087 inch (maximum opening in the narrow direction).

    The minimum open area for all types of fish screens is twenty-seven percent. The screened intake facility must have enough surface area to ensure that the velocity through the screen is less than 0.4 feet per second. Maintain fish screens to prevent injury or entrapment of fish.
54. After the first block net is secured at the upstream end, use a second block net to herd fish downstream and out of the project area.
55. Block net openings must not exceed 3/32 inches.
56. Check block nets at least three times a day for entangled fish and accumulated debris.
57. Do not install block nets at sites with heavy vegetation, large cobble or boulders, undercut banks, or deep pools unless you can secure and maintain them.

58. Install a downstream block net if fish may reenter the work area from downstream.
59. Install block nets at an angle to the direction of flow (not perpendicular to the flow) to avoid entrapping fish in the nets.
60. Install block nets at sites with reduced flow volume or velocity, uniform depth, and good accessibility.
61. Isolate fish from the work area by using block nets.
62. Secure block nets along both banks and the channel bottom to prevent failure from debris accumulation, high flows, and/or flanking.
63. To anchor block nets, place bags filled with clean round gravel along the bottom of the nets.
64. To keep fish out of the job site, leave block nets in place until the work is complete and conditions are suitable for fish.

FISH LIFE REMOVAL

65. All persons participating in capture and removal must have training, knowledge, and skills in the safe handling of fish life.
66. If electrofishing is conducted, a person with electrofishing training must be on-site to conduct or direct all electrofishing activities.
67. Capture and safely move fish life from the work area to the nearest suitable free-flowing water.
68. If personnel are available, the Washington Department of Fish and Wildlife and affected tribes may help capture and move fish life from the job site.
69. Place block nets upstream and downstream of the in-water work area before capturing and removing fish life.
70. Avoid all areas containing live freshwater mussels during project activities. If live freshwater mussels are encountered within the wetted perimeter during construction, to the extent possible carefully relocated to the nearest suitable area of free-flowing water. The WDFW Habitat Biologist shall be notified prior to conducting any mussel relocation activities.

PROJECT LOCATION

71. Locate the waterward face of all bridge elements including abutments, piers, pilings, sills, foundations, aprons, wing walls, and approach material landward of the ordinary high water line.

PROJECT DESIGN

72. Bury footings to the minimum necessary depth below scour depth as shown in the approved plans.
73. Design and construct all bridges to pass water, ice, large wood, and associated woody material and sediment likely to move under the bridge during the 100-year flood flows.
74. Install biotechnical slope protection outside the bridge shadow as shown in the approved plans.
75. As shown in the approved plans, the length of the permanent new bridge must not exceed 123 feet, the length of the vehicle use temporary bridge must not exceed 134 feet and the length of the temporary pedestrian bridge must not exceed 118 feet.
76. Approach material must be structurally stable and composed of material that if eroded into the water will not harm fish life.
77. Permanent overflow channel will be regraded for increased width, depth, flood plain configuration, gradient and planted with native vegetation to provide proper function as shown in the approved plans.
78. Design and locate new temporary access roads to prevent erosion and sediment delivery to waters of the state.

PROJECT IMPLEMENTATION

79. Work in the dry watercourse (when no natural flow is occurring in the channel, or when flow is diverted around the job site).
80. Minimize disturbance or damage to the bed and banks to the extent possible when installing bridge(s) and removing existing structures.
81. Remove the culvert in the dry or in isolation from the stream flow by using a bypass channel or culvert, or by pumping the stream flow around the work area. The Washington Department of Fish and Wildlife may grant exception if removing the culvert in the flowing stream reduces siltation or turbidity.
82. Reslope the banks to a 2 foot horizontal to 1 foot vertical slope or less.

Issue Date: 10/07/2026
Project End Date: 12/31/2028

Permit Type: HPA - Standard
Permit Number: 2026-4-698+02
Application ID: 0049834

DEMOBILIZATION AND CLEANUP

83. Remove temporary erosion and sediment control methods after job site is stabilized or within three months of project completion, whichever is sooner.
84. Restore the disturbed bed, bank, and riparian zone elevations and contours to pre-project condition.
85. Upon completion of the project, remove all materials or equipment from the site and dispose of all excess spoils and waste materials in an upland area above the limits of anticipated floodwater.
86. Completely remove any temporary fill before the end of the in-water timing window if the fill material could erode and deliver sediment-laden water into waters of the state.
87. Do not relocate removed or replaced structures within waters of the state. Remove and dispose of these structures in an upland area above the limits of anticipated floodwater.

PLANTING

88. Seed areas disturbed by construction activities with a native seed mix suitable for the site that has at least one quick-establishing plant species.
89. Replant the job site with the plant species composition and planting densities approved by the Washington Department of Fish and Wildlife and shown in the approved plans.
90. Complete replanting of riparian vegetation during the first dormant season (late fall through late winter) after project completion per the approved plan. Maintain plantings for at least three years to ensure at least eighty percent of the plantings survive. Failure to achieve the eighty percent survival in year three will require you to submit a plan with follow-up measures to achieve requirements or reasons to modify requirements.

PROJECT LOCATION(S)

Location		
SR 544 Nooksack River Overflow Culvert - ER Permanent Repair		
Latitude	**Longitude**	**County**
48.917043000000000	-122.350370000000000	Whatcom
WRIA	**Waterbody**	**Tributary to**
WRIA	Nooksack River	Nooksack River

APPLIES TO ALL HYDRAULIC PROJECT APPROVALS

This Hydraulic Project Approval (HPA) pertains only to those requirements of the Washington State Hydraulic Code, specifically Chapter 77.55 RCW. Additional authorization from other public agencies may be necessary for this project. If the project requires the handling, capture, and/or transport of aquatic or terrestrial species additional permits and authorizations are required from WDFW. The person(s) to whom this HPA is issued is responsible for applying for and obtaining any additional authorization from other public agencies (local, state, and/or federal) that may be necessary for this project.

This Hydraulic Project Approval (HPA) shall be available on the job site at all times and all its provisions followed by the person(s) to whom this HPA is issued and operator(s) performing the work.

Page 6 of 8

Washington Department of
Fish and Wildlife
PO Box 43234
Olympia, WA 98504-3234
(360) 902-2200

Issue Date: 10/07/2026
Project End Date: 12/31/2028

Permit Type: HPA - Standard
Permit Number: 2026-4-698+02
Application ID: 0049834

This Hydraulic Project Approval does not authorize trespass.

The person(s) to whom this Hydraulic Project Approval (HPA) is issued and operator(s) performing the work may be held liable for any loss or damage to fish life or fish habitat that results from failure to comply with the provisions of this HPA.

Failure to comply with the provisions of this Hydraulic Project Approval could result in a civil action against you, including, but not limited to, a stop work order or notice to comply, and/or a gross misdemeanor criminal charge, possibly punishable by a fine and/or imprisonment.

All Hydraulic Project Approvals (HPA) issued under RCW 77.55.021 are subject to additional restrictions, conditions, or revocation if the Washington Department of Fish and Wildlife determines that changed conditions require such action. The person(s) to whom this HPA is issued has the right to appeal those decisions. Procedures for filing appeals are listed below.

MINOR MODIFICATIONS TO THIS HYDRAULIC PROJECT APPROVAL (HPA): You may request approval of minor modifications to the required work timing or the plans and specifications approved in this HPA unless this is a General HPA. If this is a General HPA you must use the Major Modification process described below. Any approved minor modification will require the issuance of a letter documenting the approval. A minor modification to the required work timing means any change to the work start or end dates of the current work season to enable project or work phase completion. Minor modifications will be approved only if spawning or incubating fish are not present within the vicinity of the project. You may request subsequent minor modifications to the required work timing. A minor modification of the plans and specifications means any changes in the materials, characteristics, or construction of your project that do not alter the project's impact to fish life or habitat and do not require a change in the provisions of the HPA to mitigate the impacts of the modification. If you originally applied for your HPA through the online Aquatic Protection Permitting System (APPS), you may request a minor modification through APPS. A link to APPS is at https://hpa.wdfw.wa.gov/s. If you did not use APPS you must submit a written request for a minor modification to an existing HPA. Written requests must include the name of the permittee, the name of the authorized agent if applicable, the APP ID or HPA number, the date issued, the permitting biologist, the requested changes to the HPA, the reason for the requested change, the date of the request, and the requestor's signature. Send your written request by email to HPAapplications@dfw.wa.gov, or by mail to Washington Department of Fish and Wildlife, PO Box 43234, Olympia, Washington 98504-3234. You should allow up to 45 days for the Department to process your request.

MAJOR MODIFICATIONS TO THIS HYDRUALIC PROJECT APPROVAL (HPA): You may request approval of major modifications to any aspect of your HPA. Any approved change other than a minor modification to your HPA will require the issuance of a new HPA. If you originally applied for your HPA through the online Aquatic Protection Permitting System (APPS), you may request a major modification through APPS. A link to APPS is at https://hpa.wdfw.wa.gov/s. If you did not use APPS you must submit a written request for a major modification to an existing HPA. Written requests must include the name of the permittee, the name of the authorized agent if applicable, the APP ID or HPA number, the date issued, the permitting biologist, the requested changes to the HPA, the reason for the requested change, the date of the request, and the requestor's signature. Send your written request by email to HPAapplications@dfw.wa.gov or by mail to Washington Department of Fish and Wildlife, PO Box 43234, Olympia, Washington 98504-3234. You should allow up to 45 days for the Department to process your request.

APPEALS INFORMATION

If you wish to appeal the issuance, denial, conditioning, or modification of a Hydraulic Project Approval (HPA), the Washington Department of Fish and Wildlife (WDFW) recommends that you first contact the WDFW employee

who issued, denied, or conditioned the HPA to discuss your concerns. Such a discussion may resolve your concerns without the need for further appeal action. If you proceed with an appeal, you may request an informal or formal appeal. WDFW encourages you to take advantage of the informal appeal process before initiating a formal appeal. The informal appeal process includes a review by WDFW management of the HPA or denial and often resolves issues faster and with less legal complexity than the formal appeal process. If the informal appeal process does not resolve your concerns, you may advance your appeal to the formal process.

A. INFORMAL APPEALS: WAC 220-660-460 is the rule describing how to request an informal appeal of WDFW actions taken under Chapter 77.55 RCW. Please refer to that rule for complete informal appeal procedures. The following information summarizes that rule:

   A person who is aggrieved by the issuance, denial, conditioning, or modification of an HPA may request an informal appeal of that action. You must send your request to WDFW by mail to the HPA Appeals Coordinator, Department of Fish and Wildlife, Habitat Program, PO Box 43234, Olympia, Washington 98504-3234; e-mail to HPAapplications@dfw.wa.gov; fax to (360) 902-2946; or hand-delivery to the WDFW Habitat Program, Natural Resources Building, 1111 Washington St SE, Olympia, Washington 98501. WDFW must receive your request within 30 days from the date you receive notice of the decision. If you agree, and you applied for the HPA, resolution of the appeal may be facilitated through an informal conference with the WDFW employee responsible for the decision and a supervisor. If a resolution is not reached through the informal conference, or you are not the person who applied for the HPA, the HPA Appeals Coordinator or designee may conduct an informal hearing or review and recommend a decision to the Habitat Program Director or designee. If you are not satisfied with the results of the informal appeal, you may file a request for a formal appeal.

B. FORMAL APPEALS: WAC 220-660-470 is the rule describing how to request a formal appeal of WDFW actions taken under Chapter 77.55 RCW. Please refer to that rule for complete formal appeal procedures. The following information summarizes that rule:

   A person who is aggrieved by the issuance, denial, conditioning, or modification of an HPA may request a formal appeal of that action. You must send your request for a formal appeal to the clerk of the Pollution Control Hearings Boards and serve a copy on WDFW within 30 days from the date you receive notice of the decision. You may serve WDFW by mail to the HPA Appeals Coordinator, Department of Fish and Wildlife, Habitat Program, PO Box 43234, Olympia, Washington 98504-3234; e-mail to HPAapplications@dfw.wa.gov; fax to (360) 902-2946; or hand-delivery to the Habitat Program, Natural Resources Building, 1111 Washington St SE, Olympia, Washington 98501. The time period for requesting a formal appeal is suspended during consideration of a timely informal appeal. If there has been an informal appeal, you may request a formal appeal within 30 days from the date you receive the Habitat Program Director's or designee's written decision in response to the informal appeal.

C. FAILURE TO APPEAL WITHIN THE REQUIRED TIME PERIODS: If there is no timely request for an appeal, the WDFW action shall be final and unappealable.

Lizzi Lutes
Area Habitat Biologist
(564) 676-1491
lizzi.lutes@dfw.wa.gov



For Director
DFW

Page 8 of 8

CONTRACT PROVISIONS FOR FEDERAL-AID CONSTRUCTION CONTRACTS

I. General
II. Nondiscrimination
III. Davis-Bacon and Related Act Provisions
IV. Contract Work Hours and Safety Standards Act Provisions
V. Subletting or Assigning the Contract
VI. Safety: Accident Prevention
VII. False Statements Concerning Highway Projects
VIII. Implementation of Clean Air Act and Federal Water Pollution Control Act
IX. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion
X. Certification Regarding Use of Contract Funds for Lobbying
XI. Use of United States-Flag Vessels

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only).

I. GENERAL

1. Historically, contracting agencies using Federal-aid highway funds were required to ensure Form FHWA-1273 was physically incorporated into all contracts and subcontracts. Effective June 10, 2026, this requirement was eliminated [91 FR 25492]. Future use of Form FHWA-1273 is now optional on the part of the contracting agency using Federal-aid highway funds. FHWA continues to make Form FHWA-1273 available as a convenience to contracting agencies. Contracting agencies must continue to ensure compliance with the provisions cited in Form FHWA-1273 in accordance with the provisions regardless of the use of Form FHWA-1273. Accordingly, the contracting agency retains the authority to determine whether the contractor must use Form FHWA-1273 to physically incorporate required contract provisions in each subcontract and in lower tier contracts. Where permitted by the contracting agency, the contractor may choose other ways to include required contract provisions in each subcontract, besides incorporating Form FHWA-1273. Contract provisions in Form FHWA-1273 are not required to be physically included in subcontracts for design services on Federal-aid design-build contracts, or in purchase orders, rental agreements and other agreements for supplies or services.

The applicable provisions of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor or design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in solicitation-for-bids or request-for-proposals documents.

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. 23 U.S.C. 114(b). The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors. 23 U.S.C. 101(a).

II. NONDISCRIMINATION

The contractor and all subcontractors must comply with the following policies: 29 CFR Parts 1625-1627, 23 U.S.C. 140, Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. 794), Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C. 2000d et seq.), and related regulations including 49 CFR Parts 21, 26, and 27, including any amendments thereto.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with 29 CFR Parts 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with 23 U.S.C. 140, Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. 794), and Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C. 2000d et seq.), and related regulations including 49 CFR Parts 21, 26, and 27, including any amendments thereto.

The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR Part 35 and 29 CFR Part 1630 are incorporated by reference in this contract.

1. Assurances Required:

a. The requirements of 49 CFR Part 26, including any amendments thereto, and the State DOT's FHWA-approved Disadvantaged Business Enterprise (DBE) program are incorporated by reference.

b. The contractor, subrecipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR part 26, including any amendments thereto, in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate, which may include, but is not limited to:

(1) Withholding monthly progress payments;
(2) Assessing sanctions;
(3) Liquidated damages; and/or
(4) Disqualifying the contractor from future bidding as non-responsible.

c. The Title VI and nondiscrimination provisions of U.S. DOT Order 1050.2A at Appendixes A and E, including any amendments thereto, are incorporated by reference. 49 CFR Part 21.

III. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding $2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size), in accordance with 29 CFR 5.5. The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. 23 U.S.C. 113. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. 23 U.S.C. 101. Where applicable law requires that projects be treated as a project on a Federal-aid highway, the provisions of this subpart will apply regardless of the location of the project. Examples include: Surface Transportation Block Grant Program projects funded under 23 U.S.C. 133 [excluding recreational trails projects], the Nationally Significant Freight and Highway Projects funded under 23 U.S.C. 117, and National Highway Freight Program projects funded under 23 U.S.C. 167.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 “Contract provisions and related matters” with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages (29 CFR 5.5)

a. *Wage rates and fringe benefits.* All laborers and mechanics employed or working upon the site of the work (or otherwise working in construction or development of the project under a development statute), will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of basic hourly wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics. As provided in paragraphs (d) and (e) of 29 CFR 5.5, the appropriate wage determinations are effective by operation of law even if they have not been attached to the contract. Contributions made or costs reasonably anticipated for bona fide fringe benefits under the Davis-Bacon Act (40 U.S.C. 3141(2)(B)) on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.e. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics must be paid the appropriate wage rate and fringe benefits on the wage determination for the classification(s) of work actually performed, without regard to skill, except as provided in paragraph 4. of this section. Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: *Provided,* That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classifications and wage rates conformed under paragraph 1.c. of this section) and the Davis-Bacon poster (WH–1321) must be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b. *Frequently recurring classifications.* (1) In addition to wage and fringe benefit rates that have been determined to be prevailing under the procedures set forth in 29 CFR part 1, a wage determination may contain, pursuant to § 1.3(f), wage and fringe benefit rates for classifications of laborers and mechanics for which conformance requests are regularly submitted pursuant to paragraph 1.c. of this section, provided that:

(i) The work performed by the classification is not performed by a classification in the wage determination for which a prevailing wage rate has been determined;

(ii) The classification is used in the area by the construction industry; and

(iii) The wage rate for the classification bears a reasonable relationship to the prevailing wage rates contained in the wage determination.

(2) The Administrator will establish wage rates for such classifications in accordance with paragraph 1.c.(1)(iii) of this section. Work performed in such a classification must be paid at no less than the wage and fringe benefit rate listed on the wage determination for such classification.

c. *Conformance.* (1) The contracting officer must require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract be classified in conformance with the wage determination. Conformance of an additional classification and wage rate and fringe benefits is appropriate only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(ii) The classification is used in the area by the construction industry; and

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) The conformance process may not be used to split, subdivide, or otherwise avoid application of classifications listed in the wage determination.

(3) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the

classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken will be sent by the contracting officer by email to *DBAconformance@dol.gov*. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30–day period that additional time is necessary.

(4) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer will, by email to *DBAconformance@dol.gov*, refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Administrator for determination. The Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30–day period that additional time is necessary.

(5) The contracting officer must promptly notify the contractor of the action taken by the Wage and Hour Division under paragraphs 1.c.(3) and (4) of this section. The contractor must furnish a written copy of such determination to each affected worker or it must be posted as a part of the wage determination. The wage rate (including fringe benefits where appropriate) determined pursuant to paragraph 1.c.(3) or (4) of this section must be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

d. *Fringe benefits not expressed as an hourly rate.* Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor may either pay the benefit as stated in the wage determination or may pay another bona fide fringe benefit or an hourly cash equivalent thereof.

e. *Unfunded plans.* If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, *Provided,* That the Secretary of Labor has found, upon the written request of the contractor, in accordance with the criteria set forth in § 5.28, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

f. *Interest.* In the event of a failure to pay all or part of the wages required by the contract, the contractor will be required to pay interest on any underpayment of wages.

2. Withholding (29 CFR 5.5)

a. *Withholding requirements.* The contracting agency may, upon its own action, or must, upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor so much of the accrued payments or advances as may be considered necessary to satisfy the liabilities of the prime contractor or any subcontractor for the full amount of wages and monetary relief, including interest, required by the clauses set forth in this section for violations of this contract, or to satisfy any such liabilities required by any other Federal contract, or federally assisted contract subject to Davis-Bacon labor standards, that is held by the same prime contractor (as defined in § 5.2). The necessary funds may be withheld from the contractor under this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract that is subject to Davis-Bacon labor standards requirements and is held by the same prime contractor, regardless of whether the other contract was awarded or assisted by the same agency, and such funds may be used to satisfy the contractor liability for which the funds were withheld. In the event of a contractor's failure to pay any laborer or mechanic, including any apprentice or helper working on the site of the work all or part of the wages required by the contract, or upon the contractor's failure to submit the required records as discussed in paragraph 3.d. of this section, the contracting agency may on its own initiative and after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

b. *Priority to withheld funds.* The Department has priority to funds withheld or to be withheld in accordance with paragraph 2.a. of this section or Section IV, paragraph 3.a., or both, over claims to those funds by:

(1) A contractor's surety(ies), including without limitation performance bond sureties and payment bond sureties;

(2) A contracting agency for its reprocurement costs;

(3) A trustee(s) (either a court-appointed trustee or a U.S. trustee, or both) in bankruptcy of a contractor, or a contractor's bankruptcy estate;

(4) A contractor's assignee(s);

(5) A contractor's successor(s); or

(6) A claim asserted under the Prompt Payment Act, 31 U.S.C. 3901–3907.

3. Records and certified payrolls (29 CFR 5.5)

a. *Basic record requirements* (1) *Length of record retention.* All regular payrolls and other basic records must be maintained by the contractor and any subcontractor during the course of the work and preserved for all laborers and mechanics working at the site of the work (or otherwise working in construction or development of the project under a development statute) for a period of at least 3 years after all the work on the prime contract is completed.

(2) *Information required.* Such records must contain the name; Social Security number; last known address, telephone number, and email address of each such worker; each worker's correct classification(s) of work actually performed; hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in 40 U.S.C. 3141(2)(B) of the Davis-Bacon Act); daily and weekly number

of hours actually worked in total and on each covered contract; deductions made; and actual wages paid.

(3) *Additional records relating to fringe benefits.* Whenever the Secretary of Labor has found under paragraph 1.e. of this section that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in 40 U.S.C. 3141(2)(B) of the Davis-Bacon Act, the contractor must maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits.

(4) *Additional records relating to apprenticeship.* Contractors with apprentices working under approved programs must maintain written evidence of the registration of apprenticeship programs, the registration of the apprentices, and the ratios and wage rates prescribed in the applicable programs.

b. *Certified payroll requirements* (1) *Frequency and method of submission.* The contractor or subcontractor must submit weekly, for each week in which any DBA- or Related Acts-covered work is performed, certified payrolls to the contracting agency. The prime contractor is responsible for the submission of all certified payrolls by all subcontractors. A contracting agency or prime contractor may permit or require contractors to submit certified payrolls through an electronic system, as long as the electronic system requires a legally valid electronic signature; the system allows the contractor, the contracting agency, and the Department of Labor to access the certified payrolls upon request for at least 3 years after the work on the prime contract has been completed; and the contracting agency or prime contractor permits other methods of submission in situations where the contractor is unable or limited in its ability to use or access the electronic system.

(2) *Information required.* The certified payrolls submitted must set out accurately and completely all of the information required to be maintained under paragraph 3.a.(2) of this section, except that full Social Security numbers and last known addresses, telephone numbers, and email addresses must not be included on weekly transmittals. Instead, the certified payrolls need only include an individually identifying number for each worker (*e.g.,* the last four digits of the worker's Social Security number). The required weekly certified payroll information may be submitted using Optional Form WH–347 or in any other format desired. Optional Form WH–347 is available for this purpose from the Wage and Hour Division website at *https://www.dol.gov/sites/dolgov/files/WHD/legacy/files/wh347/.pdf* or its successor website. It is not a violation of this section for a prime contractor to require a subcontractor to provide full Social Security numbers and last known addresses, telephone numbers, and email addresses to the prime contractor for its own records, without weekly submission by the subcontractor to the contracting agency.

(3) *Statement of Compliance.* Each certified payroll submitted must be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor, or the contractor's or subcontractor's agent who pays or supervises the payment of the persons working on the contract, and must certify the following:

(i) That the certified payroll for the payroll period contains the information required to be provided under paragraph 3.b. of this section, the appropriate information and basic records are being maintained under paragraph 3.a. of this section, and such information and records are correct and complete;

(ii) That each laborer or mechanic (including each helper and apprentice) working on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in 29 CFR part 3; and

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification(s) of work actually performed, as specified in the applicable wage determination incorporated into the contract.

(4) *Use of Optional Form WH–347.* The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH–347 will satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(3) of this section.

(5) *Signature.* The signature by the contractor, subcontractor, or the contractor's or subcontractor's agent must be an original handwritten signature or a legally valid electronic signature.

(6) *Falsification.* The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under 18 U.S.C. 1001 and 31 U.S.C. 3729.

(7) *Length of certified payroll retention.* The contractor or subcontractor must preserve all certified payrolls during the course of the work and for a period of 3 years after all the work on the prime contract is completed.

c. *Contracts, subcontracts, and related documents.* The contractor or subcontractor must maintain this contract or subcontract and related documents including, without limitation, bids, proposals, amendments, modifications, and extensions. The contractor or subcontractor must preserve these contracts, subcontracts, and related documents during the course of the work and for a period of 3 years after all the work on the prime contract is completed.

d. *Required disclosures and access* (1) *Required record disclosures and access to workers.* The contractor or subcontractor must make the records required under paragraphs 3.a. through 3.c. of this section, and any other documents that the contracting agency, the State DOT, the FHWA, or the Department of Labor deems necessary to determine compliance with the labor standards provisions of any of the applicable statutes referenced by § 5.1, available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and must permit such representatives to interview workers during working hours on the job.

(2) *Sanctions for non-compliance with records and worker access requirements.* If the contractor or subcontractor fails to submit the required records or to make them available, or refuses to permit worker interviews during working hours on the job, the Federal agency may, after written notice to the contractor, sponsor, applicant, owner, or other entity, as the case may be, that maintains such records or that employs such workers, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available, or to permit worker interviews during working hours on the job, may be grounds for debarment action pursuant to § 5.12. In addition, any contractor or other person that fails to submit the required records or make those records available to WHD within the time WHD requests that the records be produced will be precluded from introducing as evidence in an administrative proceeding under 29 CFR part 6 any of the required records that were not provided or made available to WHD. WHD will take into consideration a reasonable request from the contractor or person for an extension of the time for submission of records. WHD will determine the reasonableness of the request and may consider, among other things, the location of the records and the volume of production.

(3) *Required information disclosures.* Contractors and subcontractors must maintain the full Social Security number and last known address, telephone number, and email address of each covered worker, and must provide them upon request to the contracting agency, the State DOT, the FHWA, the contractor, or the Wage and Hour Division of the Department of Labor for purposes of an investigation or other compliance action.

4. Apprentices and equal employment opportunity (29 CFR 5.5)

a. *Apprentices* (1) *Rate of pay.* Apprentices will be permitted to work at less than the predetermined rate for the work they perform when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship (OA), or with a State Apprenticeship Agency recognized by the OA. A person who is not individually registered in the program, but who has been certified by the OA or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice, will be permitted to work at less than the predetermined rate for the work they perform in the first 90 days of probationary employment as an apprentice in such a program. In the event the OA or a State Apprenticeship Agency recognized by the OA withdraws approval of an apprenticeship program, the contractor will no longer be permitted to use apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

(2) *Fringe benefits.* Apprentices must be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringe benefits must be paid in accordance with that determination.

(3) *Apprenticeship ratio.* The allowable ratio of apprentices to journeyworkers on the job site in any craft classification must not be greater than the ratio permitted to the contractor as to the entire work force under the registered program or the ratio applicable to the locality of the project pursuant to paragraph 4.a.(4) of this section. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated in paragraph 4.a.(1) of this section, must be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under this section must be paid not less than the applicable wage rate on the wage determination for the work actually performed.

(4) *Reciprocity of ratios and wage rates.* Where a contractor is performing construction on a project in a locality other than the locality in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyworker's hourly rate) applicable within the locality in which the construction is being performed must be observed. If there is no applicable ratio or wage rate for the locality of the project, the ratio and wage rate specified in the contractor's registered program must be observed.

b. *Equal employment opportunity.* The use of apprentices and journeyworkers under this part must be in conformity with 29 CFR part 30, including any amendments thereto.

c. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section III. 23 CFR 230.111(e)(2). The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeyworkers shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract as provided in 29 CFR 5.5.

6. Subcontracts. The contractor or subcontractor must insert in any subcontracts the clauses set forth in paragraphs (1) through (11) of this section, along with the applicable wage determination(s) and such other clauses or contract modifications as the contracting agency may by appropriate instructions require, and a clause requiring the subcontractors to include these clauses and wage determination(s) in any lower tier subcontracts. The prime contractor is responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in this section. In the event of any violations of these clauses, the prime contractor and any subcontractor(s) responsible will be liable for any unpaid wages and monetary relief, including interest from the date of the underpayment or loss, due to any workers of lower-tier subcontractors, and may be subject to debarment, as appropriate. 29 CFR 5.5.

7. Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the

contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract as provided in 29 CFR 5.5.

9. Disputes concerning labor standards. As provided in 29 CFR 5.5, disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility. a. By entering into this contract, the contractor certifies that neither it nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of 40 U.S.C. 3144(b) or § 5.12(a).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of 40 U.S.C. 3144(b) or § 5.12(a).

c. The penalty for making false statements is prescribed in the U.S. Code, Title 18 Crimes and Criminal Procedure, 18 U.S.C. 1001.

11. Anti-retaliation. It is unlawful for any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, or to cause any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, any worker or job applicant for:

a. Notifying any contractor of any conduct which the worker reasonably believes constitutes a violation of the DBA, Related Acts, this part, or 29 CFR part 1 or 3;

b. Filing any complaint, initiating or causing to be initiated any proceeding, or otherwise asserting or seeking to assert on behalf of themselves or others any right or protection under the DBA, Related Acts, this part, or 29 CFR part 1 or 3;

c. Cooperating in any investigation or other compliance action, or testifying in any proceeding under the DBA, Related Acts, this part, or 29 CFR part 1 or 3; or

d. Informing any other person about their rights under the DBA, Related Acts, this part, or 29 CFR part 1 or 3.

IV. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

Pursuant to 29 CFR 5.5(b), the following clauses apply to any Federal-aid construction contract in an amount in excess of $100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchpersons and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek. 29 CFR 5.5.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph 1. of this section the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages and interest from the date of the underpayment. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchpersons and guards, employed in violation of the clause set forth in paragraph 1. of this section, in the sum currently provided in 29 CFR 5.5(b)(2)* for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph 1. of this section.

* $33 as of January 15, 2025 (See 90 FR 1859) as may be adjusted annually by the Department of Labor, pursuant to the Federal Civil Penalties Inflation Adjustment Act of 1990.

3. Withholding for unpaid wages and liquidated damages

a. *Withholding process.* The FHWA or the contracting agency may, upon its own action, or must, upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor so much of the accrued payments or advances as may be considered necessary to satisfy the liabilities of the prime contractor or any subcontractor for any unpaid wages; monetary relief, including interest; and liquidated damages required by the clauses set forth in this section on this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract subject to the Contract Work Hours and Safety Standards Act that is held by the same prime contractor (as defined in § 5.2). The necessary funds may be withheld from the contractor under this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract that is subject to the Contract Work Hours and Safety Standards Act and is held by the same prime contractor, regardless of whether the other contract was awarded or assisted by the same agency, and such funds may be used to satisfy the contractor liability for which the funds were withheld.

b. *Priority to withheld funds.* The Department has priority to funds withheld or to be withheld in accordance with Section III paragraph 2.a. or paragraph 3.a. of this section, or both, over claims to those funds by:

(1) A contractor's surety(ies), including without limitation performance bond sureties and payment bond sureties;

(2) A contracting agency for its reprocurement costs;

(3) A trustee(s) (either a court-appointed trustee or a U.S. trustee, or both) in bankruptcy of a contractor, or a contractor's bankruptcy estate;

(4) A contractor's assignee(s);

(5) A contractor's successor(s); or

(6) A claim asserted under the Prompt Payment Act, 31 U.S.C. 3901–3907.

4. Subcontracts. The contractor or subcontractor must insert in any subcontracts the clauses set forth in paragraphs 1. through 5. of this section and a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor is responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs 1. through 5. In the event of any violations of these clauses, the prime contractor and any subcontractor(s) responsible will be liable for any unpaid wages and monetary relief, including interest from the date of the underpayment or loss, due to any workers of lower-tier subcontractors, and associated liquidated damages and may be subject to debarment, as appropriate.

5. Anti-retaliation. It is unlawful for any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, or to cause any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, any worker or job applicant for:

a. Notifying any contractor of any conduct which the worker reasonably believes constitutes a violation of the Contract Work Hours and Safety Standards Act (CWHSSA) or its implementing regulations in this part;

b. Filing any complaint, initiating or causing to be initiated any proceeding, or otherwise asserting or seeking to assert on behalf of themselves or others any right or protection under CWHSSA or this part;

c. Cooperating in any investigation or other compliance action, or testifying in any proceeding under CWHSSA or this part; or

d. Informing any other person about their rights under CWHSSA or this part.

V. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System pursuant to 23 CFR 635.116.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term “perform work with its own organization” in paragraph 1. of this section refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions: (based on longstanding interpretation)

(1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;
(2) the prime contractor remains responsible for the quality of the work of the leased employees;
(3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and
(4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract. 23 CFR 635.102.

2. Pursuant to 23 CFR 635.116(a), the contract amount upon which the requirements set forth in paragraph 1. of this section is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. Pursuant to 23 CFR 635.116(c), the contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract. (based on long-standing interpretation of 23 CFR 635.116).

5. The 30-percent self-performance requirement of paragraph (1) is not applicable to design-build contracts; however,

contracting agencies may establish their own self-performance requirements. 23 CFR 635.116(d).

VI. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR Part 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract. 23 CFR 635.108.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR Part 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704). 29 CFR 1926.10.

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

VII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR Part 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 11, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

VIII. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT (42 U.S.C. 7606; 2 CFR 200.88; EO 11738)

This provision is applicable to all Federal-aid construction contracts in excess of $150,000 and to all related subcontracts. 48 CFR 2.101; 2 CFR 200.327.

By submission of this bid/proposal or the execution of this contract or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, subcontractor, supplier, or vendor agrees to comply with all applicable standards, orders or regulations issued pursuant to the Clean Air Act (42 U.S.C. 7401-7671q) and the Federal Water Pollution Control Act, as amended (33 U.S.C. 1251-1387). Violations must be reported to the Federal Highway Administration and the Regional Office of the Environmental Protection Agency. 2 CFR Part 200, Appendix II.

The contractor agrees to include or cause to be included the requirements of this Section in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements. 2 CFR 200.327.

IX. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost $25,000 or more – as defined in 2 CFR Parts 180 and 1200. 2 CFR 180.220 and 1200.220.

1**. Instructions for Certification – First Tier Participants:**

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this

covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction. 2 CFR 180.320.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default. 2 CFR 180.325.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances. 2 CFR 180.345 and 180.350.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180, Subpart I, 180.900-180.1020, and 1200. “First Tier Covered Transactions” refers to any covered transaction between a recipient or subrecipient of Federal funds and a participant (such as the prime or general contract). “Lower Tier Covered Transactions” refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). “First Tier Participant” refers to the participant who has entered into a covered transaction with a recipient or subrecipient of Federal funds (such as the prime or general contractor). “Lower Tier Participant” refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction. 2 CFR 180.330.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold. 2 CFR 180.220 and 180.300.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. 2 CFR 180.300; 180.320, and 180.325. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. 2 CFR 180.335. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the System for Award Management website (https://www.sam.gov/). 2 CFR 180.300, 180.320, and 180.325.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default. 2 CFR 180.325.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency, 2 CFR 180.335;

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State, or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property, 2 CFR 180.800;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification, 2 CFR 180.700 and 180.800; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default. 2 CFR 180.335(d).

(5) Are not a corporation that has been convicted of a felony violation under any Federal law within the two-year period preceding this proposal (USDOT Order 4200.6 implementing appropriations act requirements); and

(6) Are not a corporation with any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted, or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability (USDOT Order 4200.6 implementing appropriations act requirements).

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant should attach an explanation to this proposal. 2 CFR 180.335 and 180.340.

* * * * *

3. **Instructions for Certification - Lower Tier Participants:**

(Applicable to all subcontracts, purchase orders, and other lower tier transactions requiring prior FHWA approval or estimated to cost $25,000 or more - 2 CFR Parts 180 and 1200). 2 CFR 180.220 and 1200.220.

a. By signing and submitting this proposal, the prospective lower tier participant is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances. 2 CFR 180.365.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180, Subpart I, 180.900 – 180.1020, and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. “First Tier Covered Transactions” refers to any covered transaction between a recipient or subrecipient of Federal funds and a participant (such as the prime or general contract). “Lower Tier Covered Transactions” refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). “First Tier Participant” refers to the participant who has entered into a covered transaction with a recipient or subrecipient of Federal funds (such as the prime or general contractor). “Lower Tier Participant” refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated. 2 CFR 1200.220 and 1200.332.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold. 2 CFR 180.220 and 1200.220.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the System for Award Management website (https://www.sam.gov/), which is compiled by the General Services Administration. 2 CFR 180.300, 180.320, 180.330, and 180.335.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment. 2 CFR 180.325.

* * * * *

4. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

a. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals:

(1) is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency, 2 CFR 180.355;

(2) is a corporation that has been convicted of a felony violation under any Federal law within the two-year period preceding this proposal (USDOT Order 4200.6 implementing appropriations act requirements); and

(3) is a corporation with any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted, or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability. (USDOT Order 4200.6 implementing appropriations act requirements)

b. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant should attach an explanation to this proposal.

* * * * *

X. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed $100,000. 49 CFR Part 20, App. A.

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such recipients shall certify and disclose accordingly.

XI. USE OF UNITED STATES-FLAG VESSELS:

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, or any other covered transaction. 46 CFR Part 381.

This requirement applies to material or equipment that is acquired for a specific Federal-aid highway project. 46 CFR 381.7. It is not applicable to goods or materials that come into inventories independent of an FHWA funded-contract.

When oceanic shipments (or shipments across the Great Lakes) are necessary for materials or equipment acquired for a specific Federal-aid construction project, the bidder, proposer, contractor, subcontractor, or vendor agrees:

1. To utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels. 46 CFR 381.7.

2. To furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, ‘on-board’ commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph (b)(1) of this section to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Office of Cargo and Commercial Sealift (MAR-620), Maritime Administration, Washington, DC 20590. (MARAD requires copies of the ocean carrier's (master) bills of lading, certified onboard, dated, with rates and charges. These bills of lading may contain business sensitive information and therefore may be submitted directly to MARAD by the Ocean Transportation Intermediary on behalf of the contractor). 46 CFR 381.7.

ATTACHMENT A - EMPLOYMENT AND MATERIALS PREFERENCE FOR APPALACHIAN DEVELOPMENT HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS ROAD CONTRACTS (40 U.S.C. sections 14501(d) and 14701 and the Appalachian Regional Commission Code as authorized under 40 U.S.C. section 14302)
This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

a. To the extent that qualified persons regularly residing in the area are not available.

b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 40 U.S.C. 14501 allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

"General Decision Number: WA20260001 06/16/2026

State: Washington

Construction Types: Highway

Counties: Washington Counties of
Adams, Asotin, Benton, Chelan, Clallam,
Clark, Columbia, Cowlitz, Douglas,
Ferry, Franklin, Garfield, Grant, Grays
Harbor, Island, Jefferson, King, Kitsap,
Kittitas, Klickitat, Lewis, Lincoln,
Mason, Okanogan, Pacific, Pend Oreille,
Pierce, San Juan, Skagit, Skamania,
Snohomish, Spokane, Stevens, Thurston,
Wahkiakum, Walla Walla, Whatcom, Whitman
and Yakima

Excludes D.O.E. Hanford Site in Benton and Franklin Counties

Modification Number	Publication Date
1	01/23/2026
2	05/18/2026
3	05/20/2026
4	**06/16/2026**

CARP0059-021 06/01/2025

	Rates	Fringes
CARPENTER: PILEDRIVER: INCLUDES DRIVING, PULLING, CUTTING, PLACING COLLARS, SETTING, WELDING, OR CREOSOTE TREATED MATERIAL, ON ALL PILING (ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN, AND YAKIMA COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGHEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT...	$ 49.76	17.28
CARPENTER: DIVER TENDER, MANIFOLD OPERATOR, ROV OPERATOR (ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN, AND YAKIMA COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGHEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT.....	$ 54.24	17.28
CARPENTER: MANIFOLD OPERATOR-MIXED GAS (ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT, KITTITAS, LINCOLN,		

OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN, AND YAKIMA COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGHEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT...$ 58.24 17.28

CARPENTER: CARPENTER (ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN, AND YAKIMA COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGHEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT.....$ 44.21 17.28

CARPENTER: ASSISTANT DIVER TENDER, ROV TENDER/TECHNICIAN (ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN, AND YAKIMA COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGHEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT.....$ 50.76 17.28

CARPENTER :BRIDGE, DOCK, AND WHARF CARPENTER (ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN, AND YAKIMA COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGHEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT.....$ 48.21 17.28

CARPENTER: DIVER STANDBY (ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN, AND YAKIMA COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGHEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT.....$ 55.24 17.28

CARPENTER: DIVER WET (ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN, AND YAKIMA COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGHEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT.....$ 110.48 17.28

CARP0096-002 06/01/2025

	Rates	Fringes
MILLWRIGHT (CLALLAM, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS,MASON, PACIFIC (NORTH OF A STRAIGHT LINE MADE BY EXTENDING THENORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFICOCEAN), PIERCE, SAN JUAN, SKAGIT, SNOHOMISH, THURSTON AND WHATCOM COUNTIES)	$ 55.39	22.38

CARP0096-007 06/01/2025

	Rates	Fringes
MILLWRIGHT (SOUTHWEST WASHINGTON: CLARK, COWLITZ, LEWIS (PILEDRIVER ONLY), PACIFIC (SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO WILLAPA BAY TO THE PACIFIC OCEAN), SKAMANIA, AND WAHKIAKUM COUNTIES.)	$ 59.35	22.38

CARP0196-004 06/01/2025

	Rates	Fringes
PILEDRIVER (CLARK, COWLITZ, *PACIFIC, SKAMANIA, AND WAHKIAKUM COUNTIES *PORTION OF PACIFIC COUNTY SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO WILLAPA BAY TO THE PACIFIC OCEAN, AND THENCE NORTH THROUGH THE NATURAL WATERWAY TO THE PACIFIC OCEAN (THIS INCLUDES THE ENTIRE PENINSULA WEST OF WILLAPA BAY))	$ 56.06	16.81

CARP0196-006 06/01/2025

	Rates	Fringes
PILEDRIVER (CLALLAM, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS, MASON, *PACIFIC, PIERCE, SAN JUAN, SKAGIT, SNOHOMISH, THURSTON AND WHATCOM COUNTIES * PORTION OF PACIFIC COUNTY NORTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN COUNTIES OR PARTS OF COUNTIES EAST OF THE 120TH MERIDIAN)	$ 65.53	19.13

CARP0206-009 06/01/2025

	Rates	Fringes
CARPENTER: BRIDGE CARPENTER (KING AND KITSAP COUNTIES)	$ 65.58	19.13
CARPENTER: CARPENTER (KING AND KITSAP COUNTIES)	$ 63.98	19.13
CARPENTER: DIVER (KING AND KITSAP COUNTIES)	$ 125.44	19.13
CARPENTER: DIVER TENDER (KING AND KITSAP COUNTIES)	$ 71.77	19.13

CARP0360-006 09/15/2025

	Rates	Fringes
CARPENTER: BRIDGE CARPENTER (PACIFIC COUNTY. PORTION OF PACIFIC COUNTY NORTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN COUNTIES OR PARTS OF COUNTIES EAST OF THE 120TH MERIDIAN) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT	$ 65.58	19.13
CARPENTER: CARPENTER/DRYWALL HANGER (PACIFIC COUNTY. PORTION OF PACIFIC COUNTY NORTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN COUNTIES OR PARTS OF COUNTIES EAST OF THE 120TH MERIDIAN) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT	$ 63.98	19.13
CARPENTER: DIVER (PACIFIC COUNTY. PORTION OF PACIFIC COUNTY NORTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN COUNTIES OR PARTS OF COUNTIES EAST OF THE 120TH MERIDIAN) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT	$ 125.44	19.13
CARPENTER: DIVER TENDER (PACIFIC COUNTY. PORTION OF PACIFIC COUNTY NORTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN COUNTIES OR PARTS OF COUNTIES EAST OF THE 120TH MERIDIAN) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT	$ 71.77	19.13

CARP0360-007 06/01/2025

	Rates	Fringes
CARPENTERS: CARPENTERS (PACIFIC COUNTY. PORTION OF PACIFIC COUNTY SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO WILLAPA BAY TO THE PACIFIC OCEAN, AND THENCE NORTH THROUGH THE NATURAL WATERWAY TO THE PACIFIC OCEAN (THIS INCLUDES THE ENTIRE PENINSULA WEST OF WILLAPA BAY)) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT	$ 54.69	16.81

CARPENTERS: DIVERS (PACIFIC COUNTY PORTION OF PACIFIC COUNTY SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO WILLAPA BAY TO THE PACIFIC OCEAN, AND THENCE NORTH THROUGH THE NATURAL WATERWAY TO THE PACIFIC OCEAN (THIS INCLUDES THE ENTIRE PENINSULA WEST OF WILLAPA BAY)) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT	$ 108.33	16.81
CARPENTERS: DIVERS TENDERS (PACIFIC COUNTY PORTION OF PACIFIC COUNTY SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO WILLAPA BAY TO THE PACIFIC OCEAN, AND THENCE NORTH THROUGH THE NATURAL WATERWAY TO THE PACIFIC OCEAN (THIS INCLUDES THE ENTIRE PENINSULA WEST OF WILLAPA BAY)) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT.	$ 64.32	16.81
CARPENTERS: DRYWALL (PACIFIC COUNTY PORTION OF PACIFIC COUNTY SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO WILLAPA BAY TO THE PACIFIC OCEAN, AND THENCE NORTH THROUGH THE NATURAL WATERWAY TO THE PACIFIC OCEAN (THIS INCLUDES THE ENTIRE PENINSULA WEST OF WILLAPA BAY)) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT	$ 54.59	16.81

CARP0360-013 06/01/2025

	Rates	Fringes
CARPENTER: BRIDGE CARPENTER (GRAYS HARBOR, LEWIS, MASON, PIERCE, AND THURSTON COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT	$ 65.58	19.13
CARPENTER: CARPENTER (GRAYS HARBOR, LEWIS, MASON, PIERCE, AND THURSTON COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT	$ 63.98	19.13
CARPENTER: DIVER (GRAYS HARBOR, LEWIS, MASON, PIERCE, AND THURSTON COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGHEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT	$ 125.44	19.13

CARPENTER: DIVER TENDER (GRAYS HARBOR, LEWIS, MASON, PIERCE, AND THURSTON COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGHEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT...$ 71.77 19.13

CARP0425-006 09/15/2025

	Rates	Fringes
CARPENTER: BRIDGE CARPENTER (CLALLAM, ISLAND, JEFFERSON, SAN JUAN, SKAGIT, SNOHOMISH, AND WHATCOM COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGHEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT.....	$ 65.58	19.13
CARPENTER: CARPENTER (CLALLAM, ISLAND, JEFFERSON, SAN JUAN, SKAGIT, SNOHOMISH, AND WHATCOM COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGHEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT.....	$ 63.98	19.13
CARPENTER: DIVER (CLALLAM, ISLAND, JEFFERSON, SAN JUAN, SKAGIT, SNOHOMISH, AND WHATCOM COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGHEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT.....	$ 125.44	19.13
CARPENTER: DIVER TENDER (CLALLAM, ISLAND, JEFFERSON, SAN JUAN, SKAGIT, SNOHOMISH, AND WHATCOM COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGHEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT.	$ 71.77	19.13

CARP0503-021 06/01/2025

	Rates	Fringes
CARPENTERS: CARPENTERS (CLARK, COWLITZ, SKAMANIA, AND WAHKIAKUM COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT.....	$ 54.69	16.81
CARPENTERS: DIVERS (CLARK, COWLITZ, SKAMANIA, AND WAHKIAKUM COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT.....	$ 108.33	16.81

CARPENTERS: DIVERS TENDERS (CLARK, COWLITZ, SKAMANIA, AND WAHKIAKUM COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW, (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGHEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT.....$ 64.32 16.81

CARPENTERS: DRYWALL (CLARK, COWLITZ, SKAMANIA, AND WAHKIAKUM COUNTIES) EMPLOYEES MAY BE REQUIRED TO PERFORM ANY COMBINATION OF WORK WITHIN THE DIVING TEAM/CREW (EXCEPT FOR DIVE SUPERVISOR) PROVIDED THEY ARE PAID AT THE HIGEST RATE OF PAY THAT THEY RECEIVED DURING THEIR SHIFT.....$ 54.59 16.81

CARP1607-010 06/01/2025

	Rates	Fringes
MILLWRIGHT (ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT, KLICKITAT, KITTITAS, LINCOLNC, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN, AND YAKIMA COUNTIES).....	$ 61.62	20.43

ELEC0046-001 08/04/2025

	Rates	Fringes
CABLE SPLICER (CALLAM, JEFFERSON, KING AND KITSAP COUNTIES).....	$ 83.56	33.71
ELECTRICIAN (CALLAM, JEFFERSON, KING AND KITSAP COUNTIES).....	$ 75.96	33.48

ELEC0048-003 01/01/2025

	Rates	Fringes
CABLE SPLICER (CLARK, KLICKITAT AND SKAMANIA COUNTIES). HOURLY ZONE PAY: HOURLY ZONE PAY SHALL BE PAID ON JOBS LOCATED OUTSIDE OF THE FREE ZONE COMPUTED FROM THE CITY CENTER OF THE FOLLOWING LISTED CITIES: PORTLAND, THE DALLES, HOOD RIVER, TILLAMOOK, SEASIDE AND ASTORIA. ZONE PAY: ZONE 1: 31-50 MILES $1.50/HOUR ZONE 2: 51-70 MILES $3.50/HOUR ZONE 3: 71-90 MILES $5.50/HOUR ZONE 4: BEYOND 90 MILES $9.00/HOUR *THESE ARE NOT MILES DRIVEN. ZONES ARE BASED ON DELORRNE STREET ATLAS USA 2006 PLUS.....	$ 44.22	21.50
ELECTRICIAN (CLARK, KLICKITAT AND SKAMANIA COUNTIES). HOURLY ZONE PAY: HOURLY ZONE PAY SHALL BE PAID ON JOBS LOCATED OUTSIDE OF THE FREE ZONE COMPUTED FROM THE CITY CENTER OF THE FOLLOWING LISTED CITIES: PORTLAND, THE DALLES, HOOD RIVER, TILLAMOOK, SEASIDE AND ASTORIA. ZONE PAY: ZONE 1: 31-50 MILES $1.50/HOUR ZONE 2: 51-70 MILES $3.50/HOUR ZONE 3: 71-90 MILES $5.50/HOUR ZONE 4: BEYOND 90 MILES $9.00/HOUR *THESE ARE NOT MILES DRIVEN. ZONES ARE BASED ON DELORRNE STREET ATLAS USA 2006 PLUS.....	$ 63.50	29.73

ELEC0048-029 01/01/2025

	Rates	Fringes
CABLE SPLICER (COWLITZ AND WAHKIAKUM COUNTY)	$ 44.22	21.50
ELECTRICIAN (COWLITZ AND WAHKIAKUM COUNTY)	$ 63.50	29.73

ELEC0073-001 07/01/2025

	Rates	Fringes
CABLE SPLICER (ADAMS, FERRY, LINCOLN, PEND OREILLE, SPOKANE, STEVENS, WHITMAN COUNTIES)	$ 34.10	16.68
ELECTRICIAN (ADAMS, FERRY, LINCOLN, PEND OREILLE, SPOKANE, STEVENS, WHITMAN COUNTIES)	$ 49.55	19.09

ELEC0076-002 08/31/2025

	Rates	Fringes
CABLE SPLICER (GRAYS HARBOR, LEWIS, MASON, PACIFIC, PIERCE, AND THURSTON COUNTIES)	$ 71.65	26.76
ELECTRICIAN (GRAYS HARBOR, LEWIS, MASON, PACIFIC, PIERCE, AND THURSTON COUNTIES)	$ 65.14	26.56

ELEC0112-005 06/01/2025

	Rates	Fringes
CABLE SPLICER (ASOTIN, BENTON, COLUMBIA, FRANKLIN, GARFIELD, KITTITAS, WALLA WALLA, YAKIMA COUNTIES)	$ 63.00	27.87
ELECTRICIAN (ASOTIN, BENTON, COLUMBIA, FRANKLIN, GARFIELD, KITTITAS, WALLA WALLA, YAKIMA COUNTIES)	$ 60.00	27.78

ELEC0191-003 06/01/2022

	Rates	Fringes
CABLE SPLICER (ISLAND, SAN JUAN, SNOHOMISH, SKAGIT AND WHATCOM COUNTIES)	$ 44.23	17.73
ELECTRICIAN (ISLAND, SAN JUAN, SNOHOMISH, SKAGIT AND WHATCOM COUNTIES)	$ 53.20	27.51

ELEC0191-004 06/01/2018

	Rates	Fringes
CABLE SPLICER (CHELAN, DOUGLAS, GRANT AND OKANOGAN COUNTIES)	$ 40.82	17.63
ELECTRICIAN (CHELAN, DOUGLAS, GRANT AND OKANOGAN COUNTIES)	$ 42.45	21.34

ENGI0302-092 06/01/2025

	Rates	Fringes
POWER EQUIPMENT OPERATOR: GROUP 1- ASPHALT PLANT OPERATORS; CABLEWAYS; CONCRETE PUMP: TRUCK MOUNT WITH BOOM ATTACHMENT OVER 42M; CRANES: 45 TONS THROUGH 99 TONS, UNDER 150? OF BOOM (INCLUDING JIB WITH ATTACHMENTS); OVERHEAD, BRIDGE TYPE: 45 TONS THROUGH 99 TONS; DERRICKS: ON BUILDING WORK; HARD TAIL END DUMP: ARTICULATING OFF-ROAD EQUIPMENT 45		

YARDS & OVER; LOADER: OVERHEAD 6 YARDS BUT NOT INCLUDING 8 YARDS; MOTOR PATROL GRADERS; MUCKING MACHINE, MOLE, TUNNEL DRILL, BORING, ROAD HEADER AND/OR SHIELD; QUAD 9, HD 41, D10 AND OVER; REMOTE CONTROL OPERATOR ON RUBBER TIRED EARTH MOVING EQUIPMENT; ROLLAGON; SCRAPERS, SELF-PROPELLED: 45 YARDS AND OVER; SPREADER: TOPSIDER & SCREEDMAN; SHOVEL, EXCAVATOR, BACKHOE: OVER 30 METRIC TONS AND UP TO 50 METRIC TONS; SLIPFORM PAVERS; TRANSPORTERS: ALL TRACK OR TRUCK TYPE; WELDER. (KING AND SNOHOMISH COUNTIES).....$ 61.93 27.57

POWER EQUIPMENT OPERATOR: GROUP 1A- CRANES: 100 TONS THROUGH 199 TONS, OR 150' OF BOOM (INCLUDING JIB WITH ATTACHMENTS); DRILLING MACHINE; OVERHEAD, BRIDGE TYPE: 100 TONS AND OVER; TOWER CRANE: UP TO 175' IN HEIGHT BASE TO BOOM; LOADER: OVERHEAD 8 YARDS & OVER; SHOVEL, EXCAVATOR, BACKHOES: OVER 50 METRIC TONS AND UP TO 90 METRIC TONS; MECHANICS. (KING AND SNOHOMISH COUNTIES).....$ 62.85 27.57

POWER EQUIPMENT OPERATOR: GROUP 1AA- CRANES: 200 TONS- 299 TONS, OR 250' OF BOOM (INCLUDING JIB WITH ATTACHMENTS); CRANES: FRICTION CRANES THROUGH 199 TONS; LEVERMAN; SHOVEL, EXCAVATOR, BACKHOES: OVER 90 METRIC TONS; TOWER CRANE: OVER 175'?THROUGH 250'?IN HEIGHT, BASE TO BOOM. (KING AND SNOHOMISH COUNTIES).....$ 63.75 27.57

POWER EQUIPMENT OPERATOR: GROUP 1AAA- CRANES: 300 TONS AND OVER OR 300'?OF BOOM (INCLUDING JIB WITH ATTACHMENTS); CRANES FRICTION: 200 TONS AND OVER; TOWER CRANES: OVER 250'?IN HEIGHT FROM BASE TO BOOM. (KING AND SNOHOMISH COUNTIES).....$ 64.66 27.57

POWER EQUIPMENT OPERATOR: GROUP 2- BATCH PLANT OPERATOR: CONCRETE; BARRIER MACHINE: (ZIPPER); BUMP CUTTER; CRANES: 20 TONS THROUGH 44 TONS WITH ATTACHMENTS; OVERHEAD, BRIDGE TYPE CRANE: 20 TONS THROUGH 44 TONS; CHIPPER; CONCRETE PUMP: TRUCK MOUNT WITH BOOM ATTACHMENT UP TO 42M; CRUSHER; DECK ENGINEER/DECK WINCHES (POWER); GRADE ENGINEER: USING BLUE PRINTS, CUT SHEETS, ETC.; FINISHING MACHINE: BIDWELL AND GAMACO & SIMILAR EQUIPMENT; GUARDRAIL PUNCH; HARD TAIL END DUMP: ARTICULATING OFF-ROAD EQUIPMENT UNDER 45 YARDS; HORIZONTAL/DIRECTIONAL DRILL OPERATOR; LOADERS: OVERHEAD UNDER 6 YARDS; LOADERS: PLANT FEED; LOCOMOTIVES: ALL; MATERIAL TRANSFER DEVICE; PILEDRIVER: (OTHER THAN CRANE MOUNT); QUICK TOWER: NO CAB, UNDER 100 FEET IN HEIGHT BASE TO BOOM; ROTO-MILL, ROTO-GRINDER; SHOVEL, EXCAVATOR, BACKHOE, TRACTOR: 15 TO 30 METRIC TONS; SUBGRADER TRIMMER; SCRAPER: SELF PROPELLED UNDER 45 YARDS; TRUCK CRANE OILER/DRIVER: 100 TONS AND OVER; TRUCK MOUNT PORTABLE CONVEYOR; -VAC TRUCK (VACTOR GUZZLER, HYDRO EXCAVATOR); YO YO PAY DOZER. (KING AND SNOHOMISH COUNTIES).....$ 61.14 27.57

POWER EQUIPMENT OPERATOR: GROUP 3- CRANES: THROUGH 19 TONS WITH ATTACHMENTS, A-FRAME OVER 10 TONS;

CONCRETE PUMP: MOUNTED OR TRAILER HIGH PRESSURE LINE PUMP, PUMP HIGH PRESSURE; CONVEYORS; DOZERS: D-9 & UNDER; DRILL OILERS: AUGER TYPE, TRUCK OR CRANE MOUNT; FORKLIFT: 3000 LBS AND OVER WITH ATTACHMENTS; HORIZONTAL/DIRECTIONAL DRILL LOCATOR; OUTSIDE HOISTS (ELEVATORS AND MANLIFTS), AIR TUGGERS, STRATO; TOWER BUCKET ELEVATORS; HYDRALIFTS/BOOM TRUCKS: OVER 10 TONS; LOADERS: ELEVATING TYPE BELT; PLANT OILER: ASPHALT, CRUSHER; RIGGER/SIGNAL PERSON, BELLMAN (CERTIFIED); ROLLER: PLANT MIX OR MULTI-LIFT MATERIALS; SAWS: CONCRETE; SCRAPERS: CONCRETE & CARRY ALL SERVICE ENGINEERS: EQUIPMENT; TRENCHING MACHINES; TRUCK CRANE OILER/DRIVER: UNDER 100 TONS; SHOVEL, EXCAVATOR, BACKHOE, TRACTORS: UNDER 15 METRIC TONS. (KING AND SNOHOMISH COUNTIES).....$ 60.46 27.57

POWER EQUIPMENT OPERATOR: GROUP 4- ASSISTANT ENGINEER; BOBCAT; BROOMS; COMPRESSOR; CONCRETE FINISH MACHINE: LASER SCREED; CRANES, A-FRAME: 10 TONS AND UNDER; ELEVATOR AND MAN-LIFT: PERMANENT AND SHAFT TYPE; FORKLIFTS: UNDER 3000 LBS. WITH ATTACHMENTS; GRADECHECKER/STAKEMAN; HYDRALIFTS/BOOM TRUCKS: 10 TONS AND UNDER; OIL DISTRIBUTORS, BLOWER DISTRIBUTION & MULCH SEEDING OPERATOR; PAVEMENT BREAKER; POSTHOLE DIGGER: MECHANICAL; POWER PLANT; PUMPS: WATER; -RIGGER AND BELLMAN; ROLLER: OTHER THAN PLANT MIX; WHEEL TRACTORS: FARM ALL TYPE; SHOTCRETE/GUNITE EQUIPMENT; BROKK: REMOTE DEMOLITION EQUIPMENT. (KING AND SNOHOMISH COUNTIES).....$ 56.63 27.57

ENGI0302-093 06/01/2025

	Rates	Fringes
POWER EQUIPMENT OPERATOR: GROUP 1- ASPHALT PLANT OPERATORS; CABLEWAYS; CONCRETE PUMP: TRUCK MOUNT WITH BOOM ATTACHMENT OVER 42M; CRANES: 45 TONS THROUGH 99 TONS, UNDER 150'?OF BOOM (INCLUDING JIB WITH ATTACHMENTS); OVERHEAD, BRIDGE TYPE: 45 TONS THROUGH 99 TONS; DERRICKS: ON BUILDING WORK; HARD TAIL END DUMP: ARTICULATING OFF-ROAD EQUIPMENT 45 YARDS & OVER; LOADER: OVERHEAD 6 YARDS BUT NOT INCLUDING 8 YARDS; MOTOR PATROL GRADERS; MUCKING MACHINE, MOLE, TUNNEL DRILL, BORING, ROAD HEADER AND/OR SHIELD; QUAD 9, HD 41, D10 AND OVER; REMOTE CONTROL OPERATOR ON RUBBER TIRED EARTH MOVING EQUIPMENT; ROLLAGON; SCRAPERS, SELF-PROPELLED: 45 YARDS AND OVER; SPREADER: TOPSIDER & SCREEDMAN; SHOVEL, EXCAVATOR, BACKHOE: OVER 30 METRIC TONS AND UP TO 50 METRIC TONS; SLIPFORM PAVERS; TRANSPORTERS: ALL TRACK OR TRUCK TYPE; WELDER. (SKAGIT AND WHATCOM COUNTIES).....	$ 61.47	27.57
POWER EQUIPMENT OPERATOR: GROUP 1A- CRANES: 100 TONS THROUGH 199 TONS, OR 150'?OF BOOM (INCLUDING JIB WITH ATTACHMENTS); DRILLING MACHINE; OVERHEAD, BRIDGE TYPE: 100 TONS AND OVER; TOWER CRANE: UP TO		

175'?IN HEIGHT BASE TO BOOM; LOADER: OVERHEAD 8 YARDS & OVER; SHOVEL, EXCAVATOR, BACKHOES: OVER 50 METRIC TONS AND UP TO 90 METRIC TONS; MECHANICS. (SKAGIT AND WHATCOM COUNTIES).....$ 62.39 27.57

POWER EQUIPMENT OPERATOR: GROUP 1AA- CRANES: 200 TONS- 299 TONS, OR 250'?OF BOOM (INCLUDING JIB WITH ATTACHMENTS); CRANES: FRICTION CRANES THROUGH 199 TONS; LEVERMAN; SHOVEL, EXCAVATOR, BACKHOES: OVER 90 METRIC TONS; TOWER CRANE: OVER 175'?THROUGH 250'?IN HEIGHT, BASE TO BOOM. (SKAGIT AND WHATCOM COUNTIES).....$ 63.29 27.57

POWER EQUIPMENT OPERATOR: GROUP 1AAA- CRANES: 300 TONS AND OVER OR 300'?OF BOOM (INCLUDING JIB WITH ATTACHMENTS); CRANES FRICTION: 200 TONS AND OVER; TOWER CRANES: OVER 250'?IN HEIGHT FROM BASE TO BOOM. (SKAGIT AND WHATCOM COUNTIES).....$ 64.19 27.57

POWER EQUIPMENT OPERATOR: GROUP 2- BATCH PLANT OPERATOR: CONCRETE; BARRIER MACHINE: (ZIPPER); BUMP CUTTER; CRANES: 20 TONS THROUGH 44 TONS WITH ATTACHMENTS; OVERHEAD, BRIDGE TYPE CRANE: 20 TONS THROUGH 44 TONS; CHIPPER; CONCRETE PUMP: TRUCK MOUNT WITH BOOM ATTACHMENT UP TO 42M; CRUSHER; DECK ENGINEER/DECK WINCHES (POWER); GRADE ENGINEER: USING BLUE PRINTS, CUT SHEETS, ETC.; FINISHING MACHINE: BIDWELL AND GAMACO & SIMILAR EQUIPMENT; GUARDRAIL PUNCH; HARD TAIL END DUMP: ARTICULATING OFF-ROAD EQUIPMENT UNDER 45 YARDS; HORIZONTAL/DIRECTIONAL DRILL OPERATOR; LOADERS: OVERHEAD UNDER 6 YARDS; LOADERS: PLANT FEED; LOCOMOTIVES: ALL; MATERIAL TRANSFER DEVICE; PILEDRIVER: (OTHER THAN CRANE MOUNT); QUICK TOWER: NO CAB, UNDER 100 FEET IN HEIGHT BASE TO BOOM; ROTO-MILL, ROTO-GRINDER; SHOVEL, EXCAVATOR, BACKHOE, TRACTOR: 15 TO 30 METRIC TONS; SUBGRADER TRIMMER; SCRAPER: SELF PROPELLED UNDER 45 YARDS; TRUCK CRANE OILER/DRIVER: 100 TONS AND OVER; TRUCK MOUNT PORTABLE CONVEYOR; -VAC TRUCK (VACTOR GUZZLER, HYDRO EXCAVATOR); YO YO PAY DOZER. (SKAGIT AND WHATCOM COUNTIES).....$ 60.69 27.57

POWER EQUIPMENT OPERATOR: GROUP 3- CRANES: THROUGH 19 TONS WITH ATTACHMENTS, A-FRAME OVER 10 TONS; CONCRETE PUMP: MOUNTED OR TRAILER HIGH PRESSURE LINE PUMP, PUMP HIGH PRESSURE; CONVEYORS; DOZERS: D-9 & UNDER; DRILL OILERS: AUGER TYPE, TRUCK OR CRANE MOUNT; FORKLIFT: 3000 LBS AND OVER WITH ATTACHMENTS; HORIZONTAL/DIRECTIONAL DRILL LOCATOR; OUTSIDE HOISTS (ELEVATORS AND MANLIFTS), AIR TUGGERS, STRATO; TOWER BUCKET ELEVATORS; HYDRALIFTS/BOOM TRUCKS: OVER 10 TONS; LOADERS: ELEVATING TYPE BELT; PLANT OILER: ASPHALT, CRUSHER; RIGGER/SIGNAL PERSON, BELLMAN (CERTIFIED); ROLLER: PLANT MIX OR MULTI-LIFT MATERIALS; SAWS: CONCRETE; SCRAPERS: CONCRETE & CARRY ALL SERVICE ENGINEERS: EQUIPMENT; TRENCHING MACHINES; TRUCK CRANE OILER/DRIVER: UNDER 100 TONS; SHOVEL, EXCAVATOR, BACKHOE, TRACTORS: UNDER 15 METRIC TONS. (SKAGIT

AND WHATCOM COUNTIES).....$ 60.02 27.57
POWER EQUIPMENT OPERATOR: GROUP 4- ASSISTANT ENGINEER; BOBCAT; BROOMS; COMPRESSOR; CONCRETE FINISH MACHINE: LASER SCREED; CRANES, A-FRAME: 10 TONS AND UNDER; ELEVATOR AND MAN-LIFT: PERMANENT AND SHAFT TYPE; FORKLIFTS: UNDER 3000 LBS. WITH ATTACHMENTS; GRADECHECKER/STAKEMAN; HYDRALIFTS/BOOM TRUCKS: 10 TONS AND UNDER; OIL DISTRIBUTORS, BLOWER DISTRIBUTION & MULCH SEEDING OPERATOR; PAVEMENT BREAKER; POSTHOLE DIGGER: MECHANICAL; POWER PLANT; PUMPS: WATER; -RIGGER AND BELLMAN; ROLLER: OTHER THAN PLANT MIX; WHEEL TRACTORS: FARM ALL TYPE; SHOTCRETE/GUNITE EQUIPMENT; BROKK: REMOTE DEMOLITION EQUIPMENT SKAGIT AND WHATCOM COUNTIES.$ 56.19 27.57

ENGI0302-094 06/01/2025

	Rates	Fringes
POWER EQUIPMENT OPERATOR: GROUP 1- ASPHALT PLANT OPERATORS; CABLEWAYS; CONCRETE PUMP: TRUCK MOUNT WITH BOOM ATTACHMENT OVER 42M; CRANES: 45 TONS THROUGH 99 TONS, UNDER 150'?OF BOOM (INCLUDING JIB WITH ATTACHMENTS); OVERHEAD, BRIDGE TYPE: 45 TONS THROUGH 99 TONS; DERRICKS: ON BUILDING WORK; HARD TAIL END DUMP: ARTICULATING OFF-ROAD EQUIPMENT 45 YARDS & OVER; LOADER: OVERHEAD 6 YARDS BUT NOT INCLUDING 8 YARDS; MOTOR PATROL GRADERS; MUCKING MACHINE, MOLE, TUNNEL DRILL, BORING, ROAD HEADER AND/OR SHIELD; QUAD 9, HD 41, D10 AND OVER; REMOTE CONTROL OPERATOR ON RUBBER TIRED EARTH MOVING EQUIPMENT; ROLLAGON; SCRAPERS, SELF-PROPELLED: 45 YARDS AND OVER; SPREADER: TOPSIDER & SCREEDMAN; SHOVEL, EXCAVATOR, BACKHOE: OVER 30 METRIC TONS AND UP TO 50 METRIC TONS; SLIPFORM PAVERS; TRANSPORTERS: ALL TRACK OR TRUCK TYPE; WELDER. (KITSAP COUNTY)	$ 60.93	27.57
POWER EQUIPMENT OPERATOR: GROUP 1A- CRANES: 100 TONS THROUGH 199 TONS, OR 150'?OF BOOM (INCLUDING JIB WITH ATTACHMENTS); DRILLING MACHINE; OVERHEAD, BRIDGE TYPE: 100 TONS AND OVER; TOWER CRANE: UP TO 175'?IN HEIGHT BASE TO BOOM; LOADER: OVERHEAD 8 YARDS & OVER; SHOVEL, EXCAVATOR, BACKHOES: OVER 50 METRIC TONS AND UP TO 90 METRIC TONS; MECHANICS. KITSAP COUNTY	$ 61.83	27.57
POWER EQUIPMENT OPERATOR: GROUP 1AA- CRANES: 200 TONS- 299 TONS, OR 250'?OF BOOM (INCLUDING JIB WITH ATTACHMENTS); CRANES: FRICTION CRANES THROUGH 199 TONS; LEVERMAN; SHOVEL, EXCAVATOR, BACKHOES: OVER 90 METRIC TONS; TOWER CRANE: OVER 175' THROUGH 250'?IN HEIGHT, BASE TO BOOM. (KITSAP COUNTY)	$ 62.73	27.57
POWER EQUIPMENT OPERATOR: GROUP 1AAA- CRANES: 300 TONS AND OVER OR 300'?OF BOOM (INCLUDING JIB WITH ATTACHMENTS); CRANES FRICTION: 200 TONS AND OVER; TOWER CRANES: OVER 250'?IN HEIGHT FROM BASE TO BOOM. (KITSAP COUNTY)	$ 63.62	27.57

POWER EQUIPMENT OPERATOR: GROUP 2- BATCH PLANT OPERATOR: CONCRETE; BARRIER MACHINE: (ZIPPER); BUMP CUTTER; CRANES: 20 TONS THROUGH 44 TONS WITH ATTACHMENTS; OVERHEAD, BRIDGE TYPE CRANE: 20 TONS THROUGH 44 TONS; CHIPPER; CONCRETE PUMP: TRUCK MOUNT WITH BOOM ATTACHMENT UP TO 42M; CRUSHER; DECK ENGINEER/DECK WINCHES (POWER); GRADE ENGINEER: USING BLUE PRINTS, CUT SHEETS, ETC.; FINISHING MACHINE: BIDWELL AND GAMACO & SIMILAR EQUIPMENT; GUARDRAIL PUNCH; HARD TAIL END DUMP: ARTICULATING OFF-ROAD EQUIPMENT UNDER 45 YARDS; HORIZONTAL/DIRECTIONAL DRILL OPERATOR; LOADERS: OVERHEAD UNDER 6 YARDS; LOADERS: PLANT FEED; LOCOMOTIVES: ALL; MATERIAL TRANSFER DEVICE; PILEDRIVER: (OTHER THAN CRANE MOUNT); QUICK TOWER: NO CAB, UNDER 100 FEET IN HEIGHT BASE TO BOOM; ROTO-MILL, ROTO-GRINDER; SHOVEL, EXCAVATOR, BACKHOE, TRACTOR: 15 TO 30 METRIC TONS; SUBGRADER TRIMMER; SCRAPER: SELF PROPELLED UNDER 45 YARDS; TRUCK CRANE OILER/DRIVER: 100 TONS AND OVER; TRUCK MOUNT PORTABLE CONVEYOR; -VAC TRUCK (VACTOR GUZZLER, HYDRO EXCAVATOR); YO YO PAY DOZER. (KITSAP COUNTY).....$ 60.14 27.57

POWER EQUIPMENT OPERATOR: GROUP 3- CRANES: THROUGH 19 TONS WITH ATTACHMENTS, A-FRAME OVER 10 TONS; CONCRETE PUMP: MOUNTED OR TRAILER HIGH PRESSURE LINE PUMP, PUMP HIGH PRESSURE; CONVEYORS; DOZERS: D-9 & UNDER; DRILL OILERS: AUGER TYPE, TRUCK OR CRANE MOUNT; FORKLIFT: 3000 LBS AND OVER WITH ATTACHMENTS; HORIZONTAL/DIRECTIONAL DRILL LOCATOR; OUTSIDE HOISTS (ELEVATORS AND MANLIFTS), AIR TUGGERS, STRATO; TOWER BUCKET ELEVATORS; HYDRALIFTS/BOOM TRUCKS: OVER 10 TONS; LOADERS: ELEVATING TYPE BELT; PLANT OILER: ASPHALT, CRUSHER; RIGGER/SIGNAL PERSON, BELLMAN (CERTIFIED); ROLLER: PLANT MIX OR MULTI-LIFT MATERIALS; SAWS: CONCRETE; SCRAPERS: CONCRETE & CARRY ALL SERVICE ENGINEERS: EQUIPMENT; TRENCHING MACHINES; TRUCK CRANE OILER/DRIVER: UNDER 100 TONS; SHOVEL, EXCAVATOR, BACKHOE, TRACTORS: UNDER 15 METRIC TONS. (KITSAP COUNTY).....$ 59.49 27.57

POWER EQUIPMENT OPERATOR: GROUP 4- ASSISTANT ENGINEER; BOBCAT; BROOMS; COMPRESSOR; CONCRETE FINISH MACHINE: LASER SCREED; CRANES, A-FRAME: 10 TONS AND UNDER; ELEVATOR AND MAN-LIFT: PERMANENT AND SHAFT TYPE; FORKLIFTS: UNDER 3000 LBS. WITH ATTACHMENTS; GRADECHECKER/STAKEMAN; HYDRALIFTS/BOOM TRUCKS: 10 TONS AND UNDER; OIL DISTRIBUTORS, BLOWER DISTRIBUTION & MULCH SEEDING OPERATOR; PAVEMENT BREAKER; POSTHOLE DIGGER: MECHANICAL; POWER PLANT; PUMPS: WATER; RIGGER AND BELLMAN; ROLLER: OTHER THAN PLANT MIX; WHEEL TRACTORS: FARM ALL TYPE; SHOTCRETE/GUNITE EQUIPMENT; BROKK: REMOTE DEMOLITION EQUIPMENT. (KITSAP COUNTY).....$ 55.68 27.57

ENGI0302-095 06/01/2025

	Rates	Fringes
POWER EQUIPMENT OPERATOR: GROUP 1- ASPHALT PLANT OPERATORS; CABLEWAYS; CONCRETE PUMP: TRUCK MOUNT WITH BOOM ATTACHMENT OVER 42M; CRANES: 45 TONS THROUGH 99 TONS, UNDER 150'?OF BOOM (INCLUDING JIB WITH ATTACHMENTS); OVERHEAD, BRIDGE TYPE: 45 TONS THROUGH 99 TONS; DERRICKS: ON BUILDING WORK; HARD TAIL END DUMP: ARTICULATING OFF-ROAD EQUIPMENT 45 YARDS & OVER; LOADER: OVERHEAD 6 YARDS BUT NOT INCLUDING 8 YARDS; MOTOR PATROL GRADERS; MUCKING MACHINE, MOLE, TUNNEL DRILL, BORING, ROAD HEADER AND/OR SHIELD; QUAD 9, HD 41, D10 AND OVER; REMOTE CONTROL OPERATOR ON RUBBER TIRED EARTH MOVING EQUIPMENT; ROLLAGON; SCRAPERS, SELF-PROPELLED: 45 YARDS AND OVER; SPREADER: TOPSIDER & SCREEDMAN; SHOVEL, EXCAVATOR, BACKHOE: OVER 30 METRIC TONS AND UP TO 50 METRIC TONS; SLIPFORM PAVERS; TRANSPORTERS: ALL TRACK OR TRUCK TYPE; WELDER. (CHELAN (WEST OF THE 120TH MERIDIAN), CLALLAM, DOUGLAS (WEST OF THE 120TH MERIDIAN), GRAYS HARBOR, ISLAND, JEFFERSON, KITTITAS (WEST OF THE 120TH MERIDIAN), MASON, OKANOGAN (WEST OF THE 120TH MERIDIAN), SAN JUNA, AND YAKIMA (WEST OF THE 120TH MERIDIAN) COUNTIES)	$ 60.67	27.57
POWER EQUIPMENT OPERATOR: GROUP 1A- CRANES: 100 TONS THROUGH 199 TONS, OR 150'?OF BOOM (INCLUDING JIB WITH ATTACHMENTS); DRILLING MACHINE; OVERHEAD, BRIDGE TYPE: 100 TONS AND OVER; TOWER CRANE: UP TO 175'?IN HEIGHT BASE TO BOOM; LOADER: OVERHEAD 8 YARDS & OVER; SHOVEL, EXCAVATOR, BACKHOES: OVER 50 METRIC TONS AND UP TO 90 METRIC TONS; MECHANICS. (CHELAN (WEST OF THE 120TH MERIDIAN), CLALLAM, DOUGLAS (WEST OF THE 120TH MERIDIAN), GRAYS HARBOR, ISLAND, JEFFERSON, KITTITAS (WEST OF THE 120TH MERIDIAN), MASON, OKANOGAN (WEST OF THE 120TH MERIDIAN), SAN JUNA, AND YAKIMA (WEST OF THE 120TH MERIDIAN) COUNTIES)	$ 61.56	27.57
POWER EQUIPMENT OPERATOR: GROUP 1AA- CRANES: 200 TONS- 299 TONS, OR 250' OF BOOM (INCLUDING JIB WITH ATTACHMENTS); CRANES: FRICTION CRANES THROUGH 199 TONS; LEVERMAN; SHOVEL, EXCAVATOR, BACKHOES: OVER 90 METRIC TONS; TOWER CRANE: OVER 175' THROUGH 250' IN HEIGHT, BASE TO BOOM. (CHELAN (WEST OF THE 120TH MERIDIAN), CLALLAM, DOUGLAS (WEST OF THE 120TH MERIDIAN), GRAYS HARBOR, ISLAND, JEFFERSON, KITTITAS (WEST OF THE 120TH MERIDIAN), MASON, OKANOGAN (WEST OF THE 120TH MERIDIAN), SAN JUNA, AND YAKIMA (WEST OF THE 120TH MERIDIAN) COUNTIES)	$ 62.47	27.57
POWER EQUIPMENT OPERATOR: GROUP 1AAA- CRANES: 300 TONS AND OVER OR 300'?OF BOOM (INCLUDING JIB WITH ATTACHMENTS); CRANES FRICTION: 200 TONS AND OVER; TOWER CRANES: OVER 250'?IN HEIGHT FROM BASE TO BOOM. (CHELAN (WEST OF THE 120TH MERIDIAN), CLALLAM, DOUGLAS (WEST OF THE 120TH MERIDIAN), GRAYS HARBOR, ISLAND, JEFFERSON, KITTITAS (WEST OF		

THE 120TH MERIDIAN), MASON, OKANOGAN (WEST OF THE 120TH MERIDIAN), SAN JUNA, AND YAKIMA (WEST OF THE 120TH MERIDIAN) COUNTIES).....$ 63.35 27.57

POWER EQUIPMENT OPERATOR: GROUP 2- BATCH PLANT OPERATOR: CONCRETE; BARRIER MACHINE: (ZIPPER); BUMP CUTTER; CRANES: 20 TONS THROUGH 44 TONS WITH ATTACHMENTS; OVERHEAD, BRIDGE TYPE CRANE: 20 TONS THROUGH 44 TONS; CHIPPER; CONCRETE PUMP: TRUCK MOUNT WITH BOOM ATTACHMENT UP TO 42M; CRUSHER; DECK ENGINEER/DECK WINCHES (POWER); GRADE ENGINEER: USING BLUE PRINTS, CUT SHEETS, ETC.; FINISHING MACHINE: BIDWELL AND GAMACO & SIMILAR EQUIPMENT; GUARDRAIL PUNCH; HARD TAIL END DUMP: ARTICULATING OFF-ROAD EQUIPMENT UNDER 45 YARDS; HORIZONTAL/DIRECTIONAL DRILL OPERATOR; LOADERS: OVERHEAD UNDER 6 YARDS; LOADERS: PLANT FEED; LOCOMOTIVES: ALL; MATERIAL TRANSFER DEVICE; PILEDRIVER: (OTHER THAN CRANE MOUNT); QUICK TOWER: NO CAB, UNDER 100 FEET IN HEIGHT BASE TO BOOM; ROTO-MILL, ROTO-GRINDER; SHOVEL, EXCAVATOR, BACKHOE, TRACTOR: 15 TO 30 METRIC TONS; SUBGRADER TRIMMER; SCRAPER: SELF PROPELLED UNDER 45 YARDS; TRUCK CRANE OILER/DRIVER: 100 TONS AND OVER; TRUCK MOUNT PORTABLE CONVEYOR; VAC TRUCK (VACTOR GUZZLER, HYDRO EXCAVATOR); YO YO PAY DOZER. (CHELAN (WEST OF THE 120TH MERIDIAN), CLALLAM, DOUGLAS (WEST OF THE 120TH MERIDIAN), GRAYS HARBOR, ISLAND, JEFFERSON, KITTITAS (WEST OF THE 120TH MERIDIAN), MASON, OKANOGAN (WEST OF THE 120TH MERIDIAN), SAN JUNA, AND YAKIMA (WEST OF THE 120TH MERIDIAN) COUNTIES).....$ 59.88 27.57

POWER EQUIPMENT OPERATOR: GROUP 3- CRANES: THROUGH 19 TONS WITH ATTACHMENTS, A-FRAME OVER 10 TONS; CONCRETE PUMP: MOUNTED OR TRAILER HIGH PRESSURE LINE PUMP, PUMP HIGH PRESSURE; CONVEYORS; DOZERS: D-9 & UNDER; DRILL OILERS: AUGER TYPE, TRUCK OR CRANE MOUNT; FORKLIFT: 3000 LBS AND OVER WITH ATTACHMENTS; HORIZONTAL/DIRECTIONAL DRILL LOCATOR; OUTSIDE HOISTS (ELEVATORS AND MANLIFTS), AIR TUGGERS, STRATO; TOWER BUCKET ELEVATORS; HYDRALIFTS/BOOM TRUCKS: OVER 10 TONS; LOADERS: ELEVATING TYPE BELT; PLANT OILER: ASPHALT, CRUSHER; RIGGER/SIGNAL PERSON, BELLMAN (CERTIFIED); ROLLER: PLANT MIX OR MULTI-LIFT MATERIALS; SAWS: CONCRETE; SCRAPERS: CONCRETE & CARRY ALL SERVICE ENGINEERS: EQUIPMENT; TRENCHING MACHINES; TRUCK CRANE OILER/DRIVER: UNDER 100 TONS; SHOVEL, EXCAVATOR, BACKHOE, TRACTORS: UNDER 15 METRIC TONS. (CHELAN (WEST OF THE 120TH MERIDIAN), CLALLAM, DOUGLAS (WEST OF THE 120TH MERIDIAN), GRAYS HARBOR, ISLAND, JEFFERSON, KITTITAS (WEST OF THE 120TH MERIDIAN), MASON, OKANOGAN (WEST OF THE 120TH MERIDIAN), SAN JUNA, AND YAKIMA (WEST OF THE 120TH MERIDIAN) COUNTIES).....$ 59.23 27.57

POWER EQUIPMENT OPERATOR: GROUP 4- ASSISTANT ENGINEER; BOBCAT; BROOMS; COMPRESSOR; CONCRETE FINISH MACHINE: LASER SCREED; CRANES, A-FRAME: 10 TONS AND UNDER; ELEVATOR AND MAN-LIFT: PERMANENT AND SHAFT TYPE; FORKLIFTS: UNDER 3000 LBS. WITH ATTACHMENTS; GRADECHECKER/STAKEMAN; HYDRALIFTS/BOOM TRUCKS: 10 TONS AND UNDER; OIL DISTRIBUTORS, BLOWER DISTRIBUTION & MULCH SEEDING OPERATOR; PAVEMENT BREAKER; POSTHOLE DIGGER: MECHANICAL; POWER PLANT; PUMPS: WATER; RIGGER AND BELLMAN; ROLLER: OTHER THAN PLANT MIX; WHEEL TRACTORS: FARM ALL TYPE; SHOTCRETE/GUNITE EQUIPMENT; BROKK: REMOTE DEMOLITION EQUIPMENT. (CHELAN (WEST OF THE 120TH MERIDIAN), CLALLAM, DOUGLAS (WEST OF THE 120TH MERIDIAN), GRAYS HARBOR, ISLAND, JEFFERSON, KITTITAS (WEST OF THE 120TH MERIDIAN), MASON, OKANOGAN (WEST OF THE 120TH MERIDIAN), SAN JUNA, AND YAKIMA (WEST OF THE 120TH MERIDIAN) COUNTIES)...$ 55.43 27.57

ENGI0302-124 06/01/2025

	Rates	Fringes
POWER EQUIPMENT OPERATOR: GROUP 1- BIT GRINDERS; BOLT THREADING MACHINE; COMPRESSORS (UNDER 2000 CFM, GAS, DIESEL, OR ELECTRIC POWER); DECK HAND; FIREMAN & HEATER TENDER; HYDRO-SEEDER, MULCHER, NOZZLEMAN; OILER DRIVER, & CABLE TENDER, MUCKING MACHINE; PUMPMAN; ROLLERS, ALL TYPES ON SUBGRADE, INCLUDING SEAL AND CHIP COATINGS (FARM TYPE, CASE, JOHN DEERE & SIMILAR, OR COMPACTING VIBRATOR), EXCEPT WHEN PULLED BY DOZER WITH OPERABLE BLADE; WELDING MACHINE; CRANE OILER-DRIVER (CLD REQUIRED) & CABLE TENDER, MUCKING MACHINE. (ASOTIN, BENTON, FRANKLIN, GARFIELD, LINCOLN, SPOKANE, STEVENS, WALLA WALLA, AND WHITMAN)	$ 38.17	23.40
POWER EQUIPMENT OPERATOR: GROUP 2- A-FRAME TRUCK (SINGLE DRUM); ASSISTANT REFRIGERATION PLANT (UNDER 1000 TON); ASSISTANT PLANT OPERATOR, FIREMAN OR PUGMIXER (ASPHALT); BAGLEY OR STATIONARY SCRAPER; BELT FINISHING MACHINE; BLOWER OPERATOR (CEMENT); CEMENT HOG; COMPRESSOR (2000 CFM OR OVER, 2 OR MORE, GAS DIESEL OR ELECTRIC POWER); CONCRETE SAW (MULTIPLE CUT); DISTRIBUTOR LEVERMAN; DITCH WITCH OR SIMILAR; ELEVATOR HOISTING MATERIALS; DOPE POTS (POWER AGITATED); FORK LIFT OR LUMBER STACKER, HYDRA-LIFT & SIMILAR; GIN TRUCKS (PIPELINE); HOIST, SINGLE DRUM; LOADERS (BUCKET ELEVATORS AND CONVEYORS); LONGITUDINAL FLOAT; MIXER (PORTABLE-CONCRETE); PAVEMENT BREAKER, HYDRA-HAMMER & SIMILAR; POWER BROOM; RAILROAD BALLAST REGULATION OPERATOR (SELF-PROPELLED); RAILROAD POWER TAMPER OPERATOR (SELF-PROPELLED); RAILROAD TAMPER JACK OPERATOR (SELF-PROPELLED; SPRAY CURING MACHINE (CONCRETE); SPREADER BOX (SELF-PROPELLED); STRADDLE BUGGY (ROSS & SIMILAR ON CONSTRUCTION JOB ONLY); TRACTOR (FARM TYPE R/T WITH ATTACHMENT, EXCEPT		

BACKHOE); TUGGER OPERATOR. (ASOTIN, BENTON, FRANKLIN, GARFIELD, LINCOLN, SPOKANE, STEVENS, WALLA WALLA, AND WHITMAN) .....$ 38.56 23.40

POWER EQUIPMENT OPERATOR: GROUP 3- A-FRAME TRUCK (2 OR MORE DRUMS); ASSISTANT REFRIGERATION PLANT & CHILLER OPERATOR (OVER 1000 TON); BACKFILLERS (CLEVELAND & SIMILAR); BATCH PLANT & WET MIX OPERATOR, SINGLE UNIT (CONCRETE); BELT-CRETE CONVEYORS WITH POWER PACK OR SIMILAR; BELT LOADER (KOCAL OR SIMILAR); BENDING MACHINE; BOB CAT (SKID STEER); BORING MACHINE (EARTH); BORING MACHINE (ROCK UNDER 8 INCH BIT) (QUARRY MASTER, JOY OR SIMILAR); BUMP CUTTER (WAYNE, SAGINAU OR SIMILAR); CANAL LINING MACHINE (CONCRETE); CHIPPER (WITHOUT CRANE); CLEANING & DOPING MACHINE (PIPELINE); DECK ENGINEER; ELEVATING BELT-TYPE LOADER (EUCLID, BARBER GREEN & SIMILAR); ELEVATING GRADER-TYPE LOADER (DUMOR, ADAMS OR SIMILAR); GENERATOR PLANT ENGINEERS (DIESEL OR ELECTRIC); GUNNITE COMBINATION MIXER & COMPRESSOR; LOCOMOTIVE ENGINEER; MIXERMOBILE; MUCKING MACHINE; POSTHOLE AUGER OR PUNCH; PUMP (GROUT OR JET); SOIL STABILIZER (P & H OR SIMILAR); SPREADER MACHINE; DOZER/TRACTOR (UP TO D-6 OR EQUIVALENT) AND TRAXCAVATOR; TRAVERSE FINISH MACHINE; TURNHEAD OPERATOR. (ASOTIN, BENTON, FRANKLIN, GARFIELD, LINCOLN, SPOKANE, STEVENS, WALLA WALLA, AND WHITMAN) .....$ 39.31 23.40

POWER EQUIPMENT OPERATOR: GROUP 4- CONCRETE PUMPS (SQUEEZE-CRETE, FLOW-CRETE, PUMP- CRETE, WHITMAN & SIMILAR); CURB EXTRUDER (ASPHALT OR CONCRETE); DRILLS (CHURN, CORE, CALYX OR DIAMOND); EQUIPMENT SERVICEMAN; GREASER & OILER; HOIST (2 OR MORE DRUMS OR TOWER HOIST); LOADERS (OVERHEAD & FRONT-END, UNDER 4 YDS. R/T); REFRIGERATION PLANT ENGINEER (UNDER 1000 TON); RUBBER-TIRED SKIDDERS (R/T WITH OR WITHOUT ATTACHMENTS); SURFACE HEATER & PLANT MACHINE; TRENCHING MACHINES (UNDER 7 FT. DEPTH CAPACITY); TURNHEAD (WITH RE-SCREENING); VACUUM DRILL (REVERSE CIRCULATION DRILL UNDER 8 INCH BIT). (ASOTIN, BENTON, FRANKLIN, GARFIELD, LINCOLN, SPOKANE, STEVENS, WALLA WALLA, AND WHITMAN).....$ 39.51 23.40

POWER EQUIPMENT OPERATOR: GROUP 5- BACKHOE (UNDER 45,000 GW); BACKHOE & HOE RAM (UNDER 3/4 YD.); CARRYDECK & BOOM TRUCK (UNDER 25 TONS); CRANES (25 TONS & UNDER), ALL ATTACHMENTS INCLUDING CLAMSHELL, DRAGLINE; DERRICKS & STIFFLEGS (UNDER 65 TONS); DRILLING EQUIPMENT(8 INCH BIT & OVER) (ROBBINS, REVERSE CIRCULATION & SIMILAR); HOE RAM; PILEDRIVING ENGINEERS; PAVING (DUAL DRUM); RAILROAD TRACK LINER OPERAOTR (SELF-PROPELLED); REFRIGERATION PLANT ENGINEER (1000 TONS & OVER); SIGNALMAN (WHIRLEYS, HIGHLINE HAMMERHEADS OR SIMILAR); GRADE CHECKER. (ASOTIN, BENTON, FRANKLIN, GARFIELD, LINCOLN, SPOKANE, STEVENS, WALLA WALLA, AND WHITMAN).....$ 39.71 23.40

POWER EQUIPMENT OPERATOR: GROUP 6- ASPHALT PLANT OPERATOR; AUTOMATIC SUBGRADER (DITCHES & TRIMMERS)(AUTOGRADE, ABC, R.A. HANSEN & SIMILAR ON GRADE WIRE); BACKHOE (45,000 GW AND OVER TO 110,000 GW); BACKHOES & HOE RAM (3/4 YD. TO 3 YD.); BATCH PLANT (OVER 4 UNITS); BATCH & WET MIX OPERATOR (MULTIPLE UNITS, 2 & INCL. 4); BLADE OPERATOR (MOTOR PATROL & ATTACHMENTS); CABLE CONTROLLER (DISPATCHER); COMPACTOR (SELF-PROPELLED WITH BLADE); CONCRETE PUMP BOOM TRUCK; CONCRETE SLIP FORM PAVER; CRANES (OVER 25 TONS, TO AND INCLUDING 45 TONS), ALL ATTACHMENTS INCLUDING CLAMSHELL, DRAGLINE; CRUSHER, GRIZZLE & SCREENING PLANT OPERATOR; DOZER, 834 R/T & SIMILAR; DRILL DOCTOR; LOADER OPERATOR (FRONT-END & OVERHEAD, 4 YDS. INCL. 8 YDS.); MULTIPLE DOZER UNITS WITH SINGLE BLADE; PAVING MACHINE (ASPHALT AND CONCRETE); QUAD-TRACK OR SIMILAR EQUIPMENT; ROLLERMAN (FINISHING ASPHALT PAVEMENT); ROTO MILL (PAVEMENT GRINDER); SCRAPERS, ALL, RUBBER-TIRED; SCREED OPERATOR; SHOVEL(UNDER 3 YDS.); TRENCHING MACHINES (7 FT. DEPTH & OVER); TUG BOAT OPERATOR VACTOR GUZZLER, SUPER SUCKER; LIME BATCH TANK OPERATOR (RECYCLE TRAIN); LIME BRAIN OPERATOR (RECYCLE TRAIN); MOBILE CRUSHER OPERATOR (RECYCLE TRAIN). (ASOTIN, BENTON, FRANKLIN, GARFIELD, LINCOLN, SPOKANE, STEVENS, WALLA WALLA, AND WHITMAN) .....$ 40.00 23.40

POWER EQUIPMENT OPERATOR: GROUP 7- BACKHOE (OVER 110,000 GW); BACKHOES & HOE RAM (3 YDS & OVER); BLADE (FINISH & BLUETOP) AUTOMATIC, CMI, ABC, FINISH ATHEY & HUBER & SIMILAR WHEN USED AS AUTOMATIC; CABLEWAY OPERATORS; CONCRETE CLEANING/DECONTAMINATION MACHINE OPERATOR; CRANES (OVER 45 TONS TO BUT NOT INCLUDING 85 TONS), ALL ATTACHMENTS INCLUDING CLAMSHELL AND DRAGINE; DERRICKS & STIFFLEYS (65 TONS & OVER); ELEVATING BELT (HOLLAND TYPE); HEAVY EQUIPMENT ROBOTICS OPERATOR; LOADER (360 DEGREES REVOLVING KOEHRING SCOOPER OR SIMILAR); LOADERS (OVERHEAD & FRONT-END, OVER 8 YDS. TO 10 YDS.); RUBBER-TIRED SCRAPERS (MULTIPLE ENGINE WITH THREE OR MORE SCRAPERS); SHOVELS (3 YDS. & OVER); WHIRLEYS & HAMMERHEADS, ALL; H.D. MECHANIC; H.D. WELDER; HYDRAULIC PLATFORM TRAILERS (GOLDHOFER, SHAURERLY ANDSIMILAR); ULTRA HIGH PRESSURE WATERIET CUTTING TOOL SYSTEM OPERATOR (30,000 PSI); VACUUM BLASTING MACHINE OPERATOR. (ASOTIN, BENTON, FRANKLIN, GARFIELD, LINCOLN, SPOKANE, STEVENS, WALLA WALLA, AND WHITMAN) .....$ 40.39 23.40

POWER EQUIPMENT OPERATOR: GROUP 8- CRANES (85 TONS AND OVER, AND ALL CLIMBING, OVERHEAD,RAIL AND TOWER), ALL ATTACHMENTS INCLUDING CLAMSHELL, DRAGLINE; LOADERS (OVERHEAD AND FRONT-END, 10 YARDS AND OVER); HELICOPTER PILOT. (ASOTIN, BENTON, FRANKLIN, GARFIELD, LINCOLN, SPOKANE, STEVENS, WALLA WALLA, AND WHITMAN).....$ 42.36 23.40

ENGI0302-125 06/01/2025

	Rates	Fringes
POWER EQUIPMENT OPERATOR: GROUP 1- BIT GRINDERS; BOLT THREADING MACHINE; COMPRESSORS (UNDER 2000 CFM, GAS, DIESEL, OR ELECTRIC POWER); DECK HAND; FIREMAN & HEATER TENDER; HYDRO-SEEDER, MULCHER, NOZZLEMAN; OILER DRIVER, & CABLE TENDER, MUCKING MACHINE; PUMPMAN; ROLLERS, ALL TYPES ON SUBGRADE, INCLUDING SEAL AND CHIP COATINGS (FARM TYPE, CASE, JOHN DEERE & SIMILAR, OR COMPACTING VIBRATOR), EXCEPT WHEN PULLED BY DOZER WITH OPERABLE BLADE; WELDING MACHINE; CRANE OILER-DRIVER (CLD REQUIRED) & CABLE TENDER, MUCKING MACHINE. (ADAMS, CHELAN (EAST OF THE 120TH MERIDIAN), COLUMBIA, DOUGLAS (EAST OF THE 120TH MERIDIAN), FERRY, GRANT, OKANOGAN (EAST OF THE 120TH MERIDIAN), PEND OREILLE, STEVENS, AND YAKIMA (EAST OF THE 120TH MERIDIAN) COUNTIES)	$ 41.17	23.40
POWER EQUIPMENT OPERATOR: GROUP 2- A-FRAME TRUCK (SINGLE DRUM); ASSISTANT REFRIGERATION PLANT (UNDER 1000 TON); ASSISTANT PLANT OPERATOR, FIREMAN OR PUGMIXER (ASPHALT); BAGLEY OR STATIONARY SCRAPER; BELT FINISHING MACHINE; BLOWER OPERATOR (CEMENT); CEMENT HOG; COMPRESSOR (2000 CFM OR OVER, 2 OR MORE, GAS DIESEL OR ELECTRIC POWER); CONCRETE SAW (MULTIPLE CUT); DISTRIBUTOR LEVERMAN; DITCH WITCH OR SIMILAR; ELEVATOR HOISTING MATERIALS; DOPE POTS (POWER AGITATED); FORK LIFT OR LUMBER STACKER, HYDRA-LIFT & SIMILAR; GIN TRUCKS (PIPELINE); HOIST, SINGLE DRUM; LOADERS (BUCKET ELEVATORS AND CONVEYORS); LONGITUDINAL FLOAT; MIXER (PORTABLE-CONCRETE); PAVEMENT BREAKER, HYDRA-HAMMER & SIMILAR; POWER BROOM; RAILROAD BALLAST REGULATION OPERATOR (SELF-PROPELLED); RAILROAD POWER TAMPER OPERATOR (SELF-PROPELLED); RAILROAD TAMPER JACK OPERATOR (SELF-PROPELLED; SPRAY CURING MACHINE (CONCRETE); SPREADER BOX (SELF-PROPELLED); STRADDLE BUGGY (ROSS & SIMILAR ON CONSTRUCTION JOB ONLY); TRACTOR (FARM TYPE R/T WITH ATTACHMENT, EXCEPT BACKHOE); TUGGER OPERATOR. (ADAMS, CHELAN (EAST OF THE 120TH MERIDIAN), COLUMBIA, DOUGLAS (EAST OF THE 120TH MERIDIAN), FERRY, GRANT, OKANOGAN (EAST OF THE 120TH MERIDIAN), PEND OREILLE, STEVENS, AND YAKIMA (EAST OF THE 120TH MERIDIAN) COUNTIES)	$ 41.56	23.40
POWER EQUIPMENT OPERATOR: GROUP 3- A-FRAME TRUCK (2 OR MORE DRUMS); ASSISTANT REFRIGERATION PLANT & CHILLER OPERATOR (OVER 1000 TON); BACKFILLERS (CLEVELAND & SIMILAR); BATCH PLANT & WET MIX OPERATOR, SINGLE UNIT (CONCRETE); BELT-CRETE CONVEYORS WITH POWER PACK OR SIMILAR; BELT LOADER (KOCAL OR SIMILAR); BENDING MACHINE; BOB CAT (SKID STEER); BORING MACHINE (EARTH); BORING MACHINE (ROCK UNDER 8 INCH BIT) (QUARRY MASTER, JOY OR SIMILAR); BUMP CUTTER (WAYNE, SAGINAU OR SIMILAR);		

CANAL LINING MACHINE (CONCRETE); CHIPPER (WITHOUT CRANE); CLEANING & DOPING MACHINE (PIPELINE); DECK ENGINEER; ELEVATING BELT-TYPE LOADER (EUCLID, BARBER GREEN & SIMILAR); ELEVATING GRADER-TYPE LOADER (DUMOR, ADAMS OR SIMILAR); GENERATOR PLANT ENGINEERS (DIESEL OR ELECTRIC); GUNNITE COMBINATION MIXER & COMPRESSOR; LOCOMOTIVE ENGINEER; MIXERMOBILE; MUCKING MACHINE; POSTHOLE AUGER OR PUNCH; PUMP (GROUT OR JET); SOIL STABILIZER (P & H OR SIMILAR); SPREADER MACHINE; DOZER/TRACTOR (UP TO D-6 OR EQUIVALENT) AND TRAXCAVATOR; TRAVERSE FINISH MACHINE; TURNHEAD OPERATOR. (ADAMS, CHELAN (EAST OF THE 120TH MERIDIAN), COLUMBIA, DOUGLAS (EAST OF THE 120TH MERIDIAN), FERRY, GRANT, OKANOGAN (EAST OF THE 120TH MERIDIAN), PEND OREILLE, STEVENS, AND YAKIMA (EAST OF THE 120TH MERIDIAN) COUNTIES) ....$ 42.31 23.40

POWER EQUIPMENT OPERATOR: GROUP 4- CONCRETE PUMPS (SQUEEZE-CRETE, FLOW-CRETE, PUMP- CRETE, WHITMAN & SIMILAR); CURB EXTRUDER (ASPHALT OR CONCRETE); DRILLS (CHURN, CORE, CALYX OR DIAMOND); EQUIPMENT SERVICEMAN; GREASER & OILER; HOIST (2 OR MORE DRUMS OR TOWER HOIST); LOADERS (OVERHEAD & FRONT-END, UNDER 4 YDS. R/T); REFRIGERATION PLANT ENGINEER (UNDER 1000 TON); RUBBER-TIRED SKIDDERS (R/T WITH OR WITHOUT ATTACHMENTS); SURFACE HEATER & PLANT MACHINE; TRENCHING MACHINES (UNDER 7 FT. DEPTH CAPACITY); TURNHEAD (WITH RE-SCREENING); VACUUM DRILL (REVERSE CIRCULATION DRILL UNDER 8 INCH BIT). (ADAMS, CHELAN (EAST OF THE 120TH MERIDIAN), COLUMBIA, DOUGLAS (EAST OF THE 120TH MERIDIAN), FERRY, GRANT, OKANOGAN (EAST OF THE 120TH MERIDIAN), PEND OREILLE, STEVENS, AND YAKIMA (EAST OF THE 120TH MERIDIAN) COUNTIES) .....$ 42.51 23.40

POWER EQUIPMENT OPERATOR: GROUP 5- BACKHOE (UNDER 45,000 GW); BACKHOE & HOE RAM (UNDER 3/4 YD.); CARRYDECK & BOOM TRUCK (UNDER 25 TONS); CRANES (25 TONS & UNDER), ALL ATTACHMENTS INCLUDING CLAMSHELL, DRAGLINE; DERRICKS & STIFFLEGS (UNDER 65 TONS); DRILLING EQUIPMENT(8 INCH BIT & OVER) (ROBBINS, REVERSE CIRCULATION & SIMILAR); HOE RAM; PILEDRIVING ENGINEERS; PAVING (DUAL DRUM); RAILROAD TRACK LINER OPERAOTR (SELF-PROPELLED); REFRIGERATION PLANT ENGINEER (1000 TONS & OVER); SIGNALMAN (WHIRLEYS, HIGHLINE HAMMERHEADS OR SIMILAR); GRADE CHECKER. (ADAMS, CHELAN (EAST OF THE 120TH MERIDIAN), COLUMBIA, DOUGLAS (EAST OF THE 120TH MERIDIAN), FERRY, GRANT, OKANOGAN (EAST OF THE 120TH MERIDIAN), PEND OREILLE, STEVENS, AND YAKIMA (EAST OF THE 120TH MERIDIAN) COUNTIES) .....$ 42.71 23.40

POWER EQUIPMENT OPERATOR: GROUP 6- ASPHALT PLANT OPERATOR; AUTOMATIC SUBGRADER (DITCHES & TRIMMERS)(AUTOGRADE, ABC, R.A. HANSEN & SIMILAR ON GRADE WIRE); BACKHOE (45,000 GW AND OVER TO 110,000 GW); BACKHOES & HOE RAM (3/4 YD. TO 3 YD.); BATCH PLANT (OVER 4 UNITS); BATCH & WET MIX OPERATOR (MULTIPLE UNITS, 2 & INCL. 4); BLADE OPERATOR

(MOTOR PATROL & ATTACHMENTS); CABLE CONTROLLER (DISPATCHER); COMPACTOR (SELF-PROPELLED WITH BLADE); CONCRETE PUMP BOOM TRUCK; CONCRETE SLIP FORM PAVER; CRANES (OVER 25 TONS, TO AND INCLUDING 45 TONS), ALL ATTACHMENTS INCLUDING CLAMSHELL, DRAGLINE; CRUSHER, GRIZZLE & SCREENING PLANT OPERATOR; DOZER, 834 R/T & SIMILAR; DRILL DOCTOR; LOADER OPERATOR (FRONT-END & OVERHEAD, 4 YDS. INCL. 8 YDS.); MULTIPLE DOZER UNITS WITH SINGLE BLADE; PAVING MACHINE (ASPHALT AND CONCRETE); QUAD-TRACK OR SIMILAR EQUIPMENT; ROLLERMAN (FINISHING ASPHALT PAVEMENT); ROTO MILL (PAVEMENT GRINDER); SCRAPERS, ALL, RUBBER-TIRED; SCREED OPERATOR; SHOVEL(UNDER 3 YDS.); TRENCHING MACHINES (7 FT. DEPTH & OVER); TUG BOAT OPERATOR VACTOR GUZZLER, SUPER SUCKER; LIME BATCH TANK OPERATOR (RECYCLE TRAIN); LIME BRAIN OPERATOR (RECYCLE TRAIN); MOBILE CRUSHER OPERATOR (RECYCLE TRAIN). (ADAMS, CHELAN (EAST OF THE 120TH MERIDIAN), COLUMBIA, DOUGLAS (EAST OF THE 120TH MERIDIAN), FERRY, GRANT, OKANOGAN (EAST OF THE 120TH MERIDIAN), PEND OREILLE, STEVENS, AND YAKIMA (EAST OF THE 120TH MERIDIAN) COUNTIES).....$ 43.05 23.40

POWER EQUIPMENT OPERATOR: GROUP 7- BACKHOE (OVER 110,000 GW); BACKHOES & HOE RAM (3 YDS & OVER); BLADE (FINISH & BLUETOP) AUTOMATIC, CMI, ABC, FINISH ATHEY & HUBER & SIMILAR WHEN USED AS AUTOMATIC; CABLEWAY OPERATORS; CONCRETE CLEANING/DECONTAMINATION MACHINE OPERATOR; CRANES (OVER 45 TONS TO BUT NOT INCLUDING 85 TONS), ALL ATTACHMENTS INCLUDING CLAMSHELL AND DRAGINE; DERRICKS & STIFFLEYS (65 TONS & OVER); ELEVATING BELT (HOLLAND TYPE); HEAVY EQUIPMENT ROBOTICS OPERATOR; LOADER (360 DEGREES REVOLVING KOEHRING SCOOPER OR SIMILAR); LOADERS (OVERHEAD & FRONT-END, OVER 8 YDS. TO 10 YDS.); RUBBER-TIRED SCRAPERS (MULTIPLE ENGINE WITH THREE OR MORE SCRAPERS); SHOVELS (3 YDS. & OVER); WHIRLEYS & HAMMERHEADS, ALL; H.D. MECHANIC; H.D. WELDER; HYDRAULIC PLATFORM TRAILERS (GOLDHOFER, SHAURERLY ANDSIMILAR); ULTRA HIGH PRESSURE WATERIET CUTTING TOOL SYSTEM OPERATOR (30,000 PSI); VACUUM BLASTING MACHINE OPERATOR. (ADAMS, CHELAN (EAST OF THE 120TH MERIDIAN), COLUMBIA, DOUGLAS (EAST OF THE 120TH MERIDIAN), FERRY, GRANT, OKANOGAN (EAST OF THE 120TH MERIDIAN), PEND OREILLE, STEVENS, AND YAKIMA (EAST OF THE 120TH MERIDIAN) COUNTIES).....$ 43.39 23.40

POWER EQUIPMENT OPERATOR: GROUP 8- CRANES (85 TONS AND OVER, AND ALL CLIMBING, OVERHEAD,RAIL AND TOWER), ALL ATTACHMENTS INCLUDING CLAMSHELL, DRAGLINE; LOADERS (OVERHEAD AND FRONT-END, 10 YARDS AND OVER); HELICOPTER PILOT. (ADAMS, CHELAN (EAST OF THE 120TH MERIDIAN), COLUMBIA, DOUGLAS (EAST OF THE 120TH MERIDIAN), FERRY, GRANT, OKANOGAN (EAST OF THE 120TH MERIDIAN), PEND OREILLE, STEVENS, AND YAKIMA (EAST OF THE 120TH MERIDIAN) COUNTIES).....$ 45.36 23.40

ENGI0612-001 06/01/2025

	Rates	Fringes
POWER EQUIPMENT OPERATOR: GROUP 1A- CRANES, 100 TONS THRU 199 TONS, OR 250 FT OF BOOM (INCLUDING JIB WITH ATTACHMENTS); TOWER CRANE OVER 175 FT IN HEIGHT, BASE TO BOOM. (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (PIERCE COUNTY; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....	$ 62.32	27.32
POWER EQUIPMENT OPERATOR: GROUP 1AA- CRANES- 200 TONS TO 300 TONS, OR 250 FT OF BOOM (INCLUDING JIB WITH ATTACHMENTS; TOWER CRANE OVER 175 FT IN HEIGHT, BASE TO BOOM. (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT		

SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (PIERCE COUNTY; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 63.22 27.32

POWER EQUIPMENT OPERATOR: GROUP 1AAA- CRANES-OVER 300 TONS OR 300 FT OF BOOM (INCLUDING JIB WITH ATTACHMENT). (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (PIERCE COUNTY; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 64.11 27.32

POWER EQUIPMENT OPERATOR: GROUP 1- CABLEWAY; CRANES 45 TONS THRU 99 TONS UNDER 150 FT OF BOOM (INCLUDING JIB WITH ATTACHMENTS); CRANE-OVERHEAD, BRIDGE TYPE, 45 TONS THRU 99 TONS; DERRICKS ON BUILDING WORK; EXCAVATOR, SHOVEL, BACKHOES OVER 3 YARDS AND UNDER 6 YARDS; HARD TAIL END DUMP ARTICULATING OFF-ROAD EQUIPMENT 45 YARDS AND OVER; LOADER-OVERHEAD, 6 YARDS TO, BUT NOT INCLUDING, 8 YARDS; MUCKING MACHINE, MOLE, TUNNEL, DRILL AND/OR SHIELD; QUAD 9 HD 41, D-10; REMOTE CONTROL OPERATOR ON RUBBER TIRED EARTH MOVING EQUIPMENT; ROLLAGON; SCRAPES-SELF-PROPELLED 45 YARDS AND OVER; SLIPFORM PAVERS; TRANSPORTERS, ALL TRACK OR TRUCK TYPE. (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE

BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (PIERCE COUNTY; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 61.41 27.32

POWER EQUIPMENT OPERATOR: GROUP 2- BARRIER MACHINE (ZIPPER); BATCH PLANT OPERATOR-CONCRETE; BUMP CUTTER; CRANES, 20 TONS THRU 44 TONS WITH ATTACHMENTS; CRANE-OVERHEAD, BRIDGE TYPE, 20 TONS THROUGH 44 TONS; CHIPPER; CONCRETE PUMP-TRUCK MOUNT WITH BOOM ATTACHMENT; CRUSHER; DECK ENGINEER/DECK WINCHES (POWER); DRILLING MACHINE; EXCAVATOR, SHOVEL, BACKHOE-3 YARDS AND UNDER; FINISHING MACHINE, BIDWELL, GAMACO AND SIMILAR EQUIPMENT; GUARDRAIL PUNCH; LOADERS, OVERHEAD OUNDER 6 YARDS; LOADERS-PLANT FEED; LOCOMOTIVES-ALL; MECHANICS-ALL; MIXERS, ASHALT PLANT; MOTOR PATROL GRADERS, FINISHING; PILEDRIVER (OTHER THAN CRANE MOUNT); ROTO-MILL, ROTO-GRINDER; SCREEDMAN, SPREADER, TOPSIDE OPERATOR-BLAW KNOX, CEDAR RAPIDS, JAEGER, CATERPILLAR, BARBAR GREEN; SCRAPER-SELF-PROPELLED, HARD TAIL END DUMP, ARTICULATING OFF-ROAD EQUIPMENT-UNDER 45 YARDS; SUBGRADER TRIMMER; TRACTORS, BACKHOE OVER 75 HP; TRANSFER MATERIAL SERVICE MACHINE-SHUTTLE BUGGY, BLAW KNOWX-ROADTEC; TRUCK CRANE OILER/DRIVER-100 TONS AND OVER; TRUCK MOUNT PORTABLE CONVEYOR; YO YO PAY. (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT

UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (PIERCE COUNTY; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 60.63 27.32

POWER EQUIPMENT OPERATOR: GROUP 3- CONVEYORS; CRANES THROUGH 19 TONS WITH ATTACHMENTS; CRANE-A-FRAME OVER 10 TONS; DRILL OILERS-AUGER TYPE, TRUCK OR CRANE MOUNT; DOZER-D-9 AND UNDER; FORKLIFT-3000 LBS. AND OVER WITH ATTACHMENTS; HORIZONTAL/DIRECTIONAL DRILL LOCATOR; OUTSIDE HOISTS (ELEVATORS AND MANLIFTS), AIR TUGGERS, STRATO TOWER BUCKET AND ELEVATORS; HYDRALIFTS/BOOM TRUCKS OVER 10 TONS; LOADERS-ELEVATING TYPE, BELT; MOTOR PATROL GRADER-NONFINISHING; PLANT OILER-ASPHALT, CRUSHER; PUMP-CONCRETE; ROLLER, PLANT MIX OR MULTI-LIFT MATERIALS; SAWS-CONCRETE; SCRAPERS, CONCRETE AND CARRY ALL; SERVICE ENGINEERS-EQUIPMENT; TRENCHING MACHINES; TRUCK CRANE OILER/DRIVER UNDER 100 TONS; TRACTORS, BACKHOE UNDER 75 HP. (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE

PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (PIERCE COUNTY; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 59.96 27.32

POWER EQUIPMENT OPERATOR: GROUP 4- ASSISTANT ENGINEER; BOBCAT; BROOMS; COMPRESSOR; CONCRETE FINISH MACHINE-LASER SCREED; CRANES A-FRAME 10 TONS AND UNDER; ELEVATOR AND MANLIFT (PERMANENT AND SHAFT TYPE); FORKLIFTS-UNDER 3000 LBS. WITH ATTACHMENTS; GRADECHECKER, STAKEHOP; HYDRALIFTS/BOOM TRUCKS, 10 TONS AND UNDER; OIL DISTRIBUTORS, BLOWER DISTRIBUTION AND MULCH SEEDING OPERATOR; PAVEMENT BREAKER; POSTHOLD DIGGER-MECHANICAL; POWER PLANT; PUMPS-WATER; RIGGER AND BELLMAN; ROLLER-OTHER THAN PLANT MIX; WHEEL TRACTORS, FARMALL TYPE; SHOTCRETE/GUNITE EQUIPMENT OPERATOR. (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (PIERCE COUNTY; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 56.15 27.32

ENGI0612-008 06/01/2025

	Rates	Fringes
POWER EQUIPMENT OPERATOR: GROUP 1A- CRANES, 100 TONS THRU 199 TONS, OR 150 FT OF BOOM (INCLUDING JIB WITH ATTACHMENTS); CRANE-OVERHEAD, BRIDGE TYPE, 100 TONS AND OVER; TOWER CRANE UP TO 175 FT IN		

HEIGHT BASE TO BOOM; LOADERS-OVERHEAD, 8 YARDS AND OVER; SHOVELS, EXCAVATOR, BACKHOES-6 YARDS AND OVER WITH ATTACHMENTS. (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (LEWIS AND PACIFIC (PORTION LYING NORTH OF A PARALLEL LINE EXTENDING WEST FROM THE NORTHERN BOUNDARY OF WAHKAIKUM COUNTY TO THE SEA) COUNTIES; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 61.22 27.32

POWER EQUIPMENT OPERATOR: GROUP 1AA- CRANES- 200 TONS TO 300 TONS, OR 250 FT OF BOOM (INCLUDING JIB WITH ATTACHMENTS); TOWER CRANE OVER 175 FT IN HEIGHT, BASE TO BOOM. (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A

HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (LEWIS AND PACIFIC (PORTION LYING NORTH OF A PARALLEL LINE EXTENDING WEST FROM THE NORTHERN BOUNDARY OF WAHKAIKUM COUNTY TO THE SEA) COUNTIES; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 62.12 27.32

POWER EQUIPMENT OPERATOR: GROUP 1AAA- CRANES-OVER 300 TONS OR 300 FT OF BOOM (INCLUDING JIB WITH ATTACHMENTS). (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (LEWIS AND PACIFIC (PORTION LYING NORTH OF A PARALLEL LINE EXTENDING WEST FROM THE NORTHERN BOUNDARY OF WAHKAIKUM COUNTY TO THE SEA) COUNTIES; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 62.99 27.32

POWER EQUIPMENT OPERATOR: GROUP 1- CABLEWAY; CRANES 45 TONS THRU 99 TONS UNDER 150 FT OF BOOM (INCLUDING JIB WITH ATTACHMENTS); CRANE-OVERHEAD, VRIDGE TYPE, 45 TONS THRU 99 TONS; DERRICKS ON BUILDING WORK; EXCAVATOR, SHOVEL, BACKHOES OVER 3 YARDS AND UNDER 6 YARDS; HARD TAIL END DUMP ARTICULATING OFF-ROAD EQUIPMENT 45 YARDS AND OVER; LOADER-OVERHEAD, 6 YARDS TO, BUT NOT INCLUDING, 8 YARDS; MUCKING MACHINE, MOLE, TUNNEL, DRILL AND/OR SHIELD; QUAD 9 HD 41, D-10; REMOTE CONTROL OPERATOR

ON RUBBER TIRED EARTH MOVING EQUIPMENT; ROLLAGON; SCRAPERS-SELF-PROPELLED 45 YARDS AND OVER; SLIPFORM PAVERS; TRANSPORTERS, ALL TRACK OR TRUCK TYPE. (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (LEWIS AND PACIFIC (PORTION LYING NORTH OF A PARALLEL LINE EXTENDING WEST FROM THE NORTHERN BOUNDARY OF WAHKAIKUM COUNTY TO THE SEA) COUNTIES; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 60.32 27.32

POWER EQUIPMENT OPERATOR: GROUP 2- BARRIER MACHINE (ZIPPER); BATCH PLANT OPERATOR-CONCRETE; BUMP CUTTER; CRANES, 20 TONS THRU 44 TONS WITH ATTACHMENTS; CRANE-OVERHED, BRIDGE TYPE, 20 TONS THROUGH 44 TONS; CHIPPER; CONCRETE PUMP-TRUCK MOUNT WITH BOOM ATTACHMENT; CRUSHER; DECK ENGINEER/DECK WINCHES (POWER); DRILLING MACHINE; EXCAVATOR, SHOVEL, BACKHOE-3 YARDS AND UNDER; FINISHING MACHINE, BIDWELL, GAMACO AND SIMILAR EQUIPMENT; GUARDRAIL PUNCH; LODERS, OVERHEAD UNDER 6 YARDS; LODERS-PLANT FEED; LOCOMOTIVES-ALL; MECHANICS-ALL; MIXERS, ASPHALT PLANT; MOTOR PATROL GRADERS, FINISHING; PILEDRIVER (OTHER THAN CRANE MOUNT); ROTO-MILL, ROTO-GRINDER; SCREEDMAN, SPREADER, TOPSIDE OPERATOR-BLAW KNOX, CEDAR RAPIDS, JAEGER, CATERPILLAR, BARBAR GREEN; SCRAPER-SELF-PROPELLED, HARD TAIL END DUMP, ARTICULATING OFF-ROAD EQUIPMENT-UNDER 45 YARDS; SUBGRADER TRIMMER; TRACTORS, BACKHOE OVER 75 HP; TRANSFER MATERIAL SERVICE MACHINE-SHUTTLE BUGGY, BLAW KNOX-ROADTEC; TRUCK CRANE OILER/DRIVER-100 TONS AND OVER; TRUCK MOUNT PORTABLE CONVEYOR; YO YO PAY. (ON THE

FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (LEWIS AND PACIFIC (PORTION LYING NORTH OF A PARALLEL LINE EXTENDING WEST FROM THE NORTHERN BOUNDARY OF WAHKAIKUM COUNTY TO THE SEA) COUNTIES; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 59.56 27.32

POWER EQUIPMENT OPERATOR: GROUP 3- CONVEYORS; CRANES THROUGH 19 TONS WITH ATTACHMENTS; CRANE-A-FRAME OVER 10 TONS; DRILL OILERS-AUGER TYPE, TRUCK OR CRANE MOUNT; DOZER-D-9 AND UNDER; FORKLIFT-3000 LBS. AND OVER WITH ATTACHMENTS; HORIZONTAL/DIRECTIONAL DRILL LOCATOR; OUTSIDE HOISTS-(ELEVATORS AND MANLIFTS), AIR TUGGERS, STRATO TOWER BUCKET ELEVATORS; HYDRALIFTS/BOOM TRUCKS OVER 10 TONS; LOADERS-ELEVATING TYPE, BELT; MOTOR PATROL GRADER-NONFINISHING; PLANT OILER-ASPHALT, CRUSHER; PUMP-CONCRETE; ROLLER, PLANT MIX OR MULTI-LIFT MATERIALS; SAWS-CONCRETE; SCRAPERS, CONCRETE AND CARRY ALL; SERVICE ENGINEERS-EQUIPMENT; TRENCHING MACHINES; TRUCK CRANE OILER/DRIVER UNDER 100 TONS; TRACTORS, BACKHOE UNDER 75 HP. (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN

$150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (LEWIS AND PACIFIC (PORTION LYING NORTH OF A PARALLEL LINE EXTENDING WEST FROM THE NORTHERN BOUNDARY OF WAHKAIKUM COUNTY TO THE SEA) COUNTIES; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 58.89 27.32

POWER EQUIPMENT OPERATOR: GROUP 4- ASSISTANT ENGINEER; BOBCAT; BROOMS; COMPRESSOR; CONCRETE FINISH MACHINE-LASER SCREED; CRANES A-FRAME 10 TONS AND UNDER; ELEVATOR AND MANLIFT (PERMANENT AND SHAFT TYPE); FORKLIFTS0UNDER 3000 LBS. WITH ATTACHMENTS; GRADECHECKER, STAKEHOP; HYDRALIFTS/BOOM TRUCKS, 10 TONS AND UNDER; OIL DISTRIBUTORS, BLOWER DISTRIBUTION AND MULCH SEEDING OPERATOR; PAVEMENT BREAKER; POSTHOLE DIGGER-MECHANICAL; POWER PLANT; PUMPS-WATER; RIGGER AND BELLMAN; ROLLER-OTHER THAN PLANT MIX; WHEEL TRACTORS, FARMALL TYPE; SHOTCRETE/GUNITE EQUIPMENT OPERATOR. (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS

""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (LEWIS AND PACIFIC (PORTION LYING NORTH OF A PARALLEL LINE EXTENDING WEST FROM THE NORTHERN BOUNDARY OF WAHKAIKUM COUNTY TO THE SEA) COUNTIES; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 55.13 27.32

ENGI0612-012 06/01/2025

	Rates	Fringes
POWER EQUIPMENT OPERATOR: GROUP 1A- CRANES, 100 TONS THRU 199 TONS, OR 150 FT OF BOOM (INCLUDING JIB WITH ATTACHMENTS); CRANE-OVERHEAD, BRIDGE TYPE, 100 TONS AND OVER; TOWER CRANE UP TO 175 FT IN HEIGHT BASE TO BOOM; LOADERS-OVERHEAD, 8 YARDS AND OVER; SHOVELS, EXCAVATOR, BACKHOES-6 YARDS AND OVER WITH ATTACHMENTS.(ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (THURSTON COUNTY; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 61.81	27.32
POWER EQUIPMENT OPERATOR: GROUP 1AA- CRANES- 200 TONS TO 300 TONS, OR 250 FT OF BOOM (INCLUDING JIB WITH ATTACHMENTS); TOWER CRANE OVER 175 FT IN HEIGHT, BASE TO BOOM. (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION		

EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (THURSTON COUNTY; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 62.71 27.32

POWER EQUIPMENT OPERATOR: GROUP 1AAA- CRANES-OVER 300 TONS OR 300 FT OF BOOM (INCLUDING JIB WITH ATTACHMENTS). (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (THURSTON COUNTY; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 63.59 27.32

POWER EQUIPMENT OPERATOR: GROUP 1- CABLEWAY; CRANES 45 TONS THRU 99 TONS UNDER 150 FT OF BOOM (INCLUDING JIB WITH ATTACHMENTS); CRANE-OVERHEAD, VRIDGE TYPE, 45 TONS THRU 99 TONS; DERRICKS ON BUILDING WORK; EXCAVATOR, SHOVEL, BACKHOES OVER 3 YARDS AND UNDER 6 YARDS; HARD TAIL END DUMP ARTICULATING OFF-ROAD EQUIPMENT 45 YARDS AND OVER; LOADER-OVERHEAD, 6 YARDS TO, BUT NOT INCLUDING, 8 YARDS; MUCKING MACHINE, MOLE, TUNNEL, DRILL AND/OR SHIELD; QUAD 9 HD 41, D-10; REMOTE CONTROL OPERATOR ON RUBBER TIRED EARTH MOVING EQUIPMENT; ROLLAGON; SCRAPERS-SELF-PROPELLED 45 YARDS AND OVER; SLIPFORM PAVERS; TRANSPORTERS, ALL TRACK OR TRUCK TYPE. (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (THURSTON COUNTY; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 60.91 27.32

POWER EQUIPMENT OPERATOR: GROUP 2- BARRIER MACHINE (ZIPPER); BATCH PLANT OPERATOR-CONCRETE; BUMP CUTTER; CRANES, 20 TONS THRU 44 TONS WITH ATTACHMENTS; CRANE-OVERHED, BRIDGE TYPE, 20 TONS THROUGH 44 TONS; CHIPPER; CONCRETE PUMP-TRUCK MOUNT WITH BOOM ATTACHMENT; CRUSHER; DECK ENGINEER/DECK WINCHES (POWER); DRILLING MACHINE; EXCAVATOR, SHOVEL, BACKHOE-3 YARDS AND UNDER; FINISHING MACHINE, BIDWELL, GAMACO AND SIMILAR EQUIPMENT; GUARDRAIL PUNCH; LODERS, OVERHEAD UNDER 6 YARDS; LODERS-PLANT FEED; LOCOMOTIVES-ALL; MECHANICS-ALL; MIXERS, ASPHALT PLANT; MOTOR PATROL GRADERS, FINISHING; PILEDRIVER (OTHER THAN CRANE MOUNT); ROTO-MILL, ROTO-GRINDER; SCREEDMAN, SPREADER, TOPSIDE OPERATOR-BLAW KNOX, CEDAR RAPIDS, JAEGER,

CATERPILLAR, BARBAR GREEN; SCRAPER-SELF-PROPELLED, HARD TAIL END DUMP, ARTICULATING OFF-ROAD EQUIPMENT-UNDER 45 YARDS; SUBGRADER TRIMMER; TRACTORS, BACKHOE OVER 75 HP; TRANSFER MATERIAL SERVICE MACHINE-SHUTTLE BUGGY, BLAW KNOX-ROADTEC; TRUCK CRANE OILER/DRIVER-100 TONS AND OVER; TRUCK MOUNT PORTABLE CONVEYOR; YO YO PAY. (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (THURSTON COUNTY; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 60.14 27.32

POWER EQUIPMENT OPERATOR:GROUP 3- CONVEYORS; CRANES THROUGH 19 TONS WITH ATTACHMENTS; CRANE-A-FRAME OVER 10 TONS; DRILL OILERS-AUGER TYPE, TRUCK OR CRANE MOUNT; DOZER-D-9 AND UNDER; FORKLIFT-3000 LBS. AND OVER WITH ATTACHMENTS; HORIZONTAL/DIRECTIONAL DRILL LOCATOR; OUTSIDE HOISTS-(ELEVATORS AND MANLIFTS), AIR TUGGERS, STRATO TOWER BUCKET ELEVATORS; HYDRALIFTS/BOOM TRUCKS OVER 10 TONS; LOADERS-ELEVATING TYPE, BELT; MOTOR PATROL GRADER-NONFINISHING; PLANT OILER-ASPHALT, CRUSHER; PUMP-CONCRETE; ROLLER, PLANT MIX OR MULTI-LIFT MATERIALS; SAWS-CONCRETE; SCRAPERS, CONCRETE AND CARRY ALL; SERVICE ENGINEERS-EQUIPMENT; TRENCHING MACHINES; TRUCK CRANE OILER/DRIVER UNDER 100 TONS; TRACTORS, BACKHOE UNDER 75 HP. (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY

PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C"" SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (THURSTON COUNTY; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 59.46 27.32

POWER EQUIPMENT OPERATOR: GROUP 4- ASSISTANT ENGINEER; BOBCAT; BROOMS; COMPRESSOR; CONCRETE FINISH MACHINE-LASER SCREED; CRANES A-FRAME 10 TONS AND UNDER; ELEVATOR AND MANLIFT (PERMANENT AND SHAFT TYPE); FORKLIFTS0UNDER 3000 LBS. WITH ATTACHMENTS; GRADECHECKER, STAKEHOP; HYDRALIFTS/BOOM TRUCKS, 10 TONS AND UNDER; OIL DISTRIBUTORS, BLOWER DISTRIBUTION AND MULCH SEEDING OPERATOR; PAVEMENT BREAKER; POSTHOLE DIGGER-MECHANICAL; POWER PLANT; PUMPS-WATER; RIGGER AND BELLMAN; ROLLER-OTHER THAN PLANT MIX; WHEEL TRACTORS, FARMALL TYPE; SHOTCRETE/GUNITE EQUIPMENT OPERATOR. (ON THE FOLLOWING PROJECTS, THE RATE FOR EACH GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS: 1. PROJECTS INVOLVING WORK ON STRUCTURES SUCH AS BUILDINGS AND BRIDGES WHOSE TOTAL VALUE IS LESS THAN $1.5 MILLION EXCLUDING MECHANICAL, ELECTRICAL, AND UTILITY PORTIONS OF THE CONTRACT. 2. PROJECTS OF LESS THAN $1 MILLION WHERE NO BUILDING IS INVOLVED. SURFACING AND PAVING INCLUDED, BUT UTILITIES EXCLUDED. 3. MARINE PROJECTS (DOCKS, WHARFS, ETC.) LESS THAN $150,000. ON ALL OTHER WORK, THE PUBLISHED RATES APPLY.) HANDLING OF HAZARDOUS WASTE MATERIALS: PERSONNEL IN ALL CRAFT CLASSIFICATIONS SUBJECT TO WORKING INSIDE A FEDERALLY DESIGNATED HAZARDOUS PERIMETER SHALL BE ELIGIBLE FOR COMPENSATION IN ACCORDANCE WITH THE FOLLOWING GROUP SCHEDULE RELATIVE TO THE LEVEL OF HAZARDOUS WASTE AS OUTLINED IN THE SPECIFIC HAZARDOUS WASTE PROJECT SITE SAFETY PLAN. H-1 BASE WAGE RATE WHEN ON A HAZARDOUS WASTE SITE WHEN NOT OUTFITTED WITH PROTECTIVE CLOTHING, CLASS ""D"" SUIT- BASE WAGE RATE PLUS $0.50 PER HOUR. H-2 CLASS ""C""

SUIT- BASE WAGE RATE PLUS $1.00 PER HOUR. H-3 CLASS ""B"" SUIT- BASE WAGE RATE PLUS $1.50 PER HOUR. H-4 CLASS ""A"" SUIT- BASE WAGE RATE PLUS $2.00 PER HOUR. (THURSTON COUNTY; ZONE DIFFERENTIAL: ZONE 1 (0-25 RADIUS MILES)= BASE RATE. ZONE 2: (26-45 RADIUS MILES)= $1.00. ZONE 3: (OVER 45 RADIUS MILES) = $1.30. BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA).....$ 55.68 27.32

ENGI0701-002 01/01/2025

	Rates	Fringes

POWER EQUIPMENT OPERATOR: GROUP 1- CONCRETE BATCH PLANT AND/OR WET MIX THREE (3) UNITS OR MORE; CRANE, FLOATING 150 TON BUT LESS THAN 250 TON; CRANE, 200 TON THROUGH 299 TON WITH 200' BOOM OR LESS (INCLUDING JOB, INSERTS AND/OR ATTACHMENTS); CRANE, 90 TON THROUGH 199 TON WITH OVER 200' BOOM (INCLUDING JIB, INSERTS AND/OR ATTACHMENTS); CRANE, TOWER CRANE WITH 175' TOWER OR LESS AND WITH LESS THAN 200' JIB; CRANE, WHIRLEY 90 TON AND OVER; HELICOPTER WHEN USED IN ERECTING WORK. (CLARK, COWLITX, KLICKITAT, PACIFIC (SOUTH), SKAMANIA, AND WAHKIAKUM COUNTIES). ZONE DIFFERENTIALS (ADD TO ZONE 1 RATES). ZONE 1: BASE RATE. ZONE 2: $3.00. ZONE 3: $6.00. FOR THE FOLLOWING METROPOLITAN COUNTIES: MULTNOMAH; CLACKAMAS; MARION; WASHINGTON; YAMHILL; AND COLUMBIA; CLARK; AND COWLITZ COUNTY, WASHINGTON WITH MODIFICATIONS AS INDICATED: ALL JOBS OR PROJECTS LOCATED IN MULTNOMAH, CLACKAMAS, AND MARION COUNTIES, WEST OF THE WESTERN OBUNDARY OF MT. HOOD NATIONAL FOREST AND WEST OF MILE POST 30 ON I-84 AND WEST OF MILE POST 30 ON STATE HIGHWAY 26 AND WEST OF MILE POST 30 ON HIGHWAY 22 AND ALL JOBS OR PROJECTS LOCATED IN YAMHILL COUNTY, WASHINGTON COUNTY, AND COLUMBIA COUNTY AND ALL JOBS OR PROJECTS LOCATED IN CLARK & COWLITZ COUNTY IN THE MT. ST. HELENS ""BLAST ZONE"" SHALL RECEIVE ZONE 1 PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED IN THE AREA OUTSIDE THE IDENTIFIED BOUNDARY ABOVE, BUT LESS THAN 50 MILES FROM THE PORTLAND CITY HALL SHALL RECEIVE ZONE II PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE THAN 50 MILES FROM THE PORTLAND CITY HALL, BUT OUTSIDE THE IDENTIFIED BORDER ABOVE, SHALL RECEIVE ZONE III PAY FOR ALL CLASSIFICATION. FOR THE FOLLOWING CITIES: ALBANY, BEND , COOS BAY, EUGENE, GRANTS PASS, KLAMATH FALLS, MEDFORD, AND ROSEBURG- ALL JOBS OR PROJECTS LOCATED WITHIN 30 MILES OF THE RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE ZONE 1 PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE THAN 30 MILES AND LESS THAN 50 MILES FROM THE RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE ZONE II PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE THAN 50 MILES FROM THE RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE

ZONE III PAY FOR ALL CLASSIFICATIONS.....$ 58.94 17.15
POWER EQUIPMENT OPERATOR: GROUP 1A- CRANE, FLOATING 250 TON AND OVER; CRANE, 200 TON THROUGH 299 TON, WITH OVER 200' BOOM (INCLUDING JIB, INSERTS AND/OR ATTACHMENTS); CRANE, 300 TON THROUGH 399 TON; CRANE, TOWER CRANE WITH OVER 175' TOWER OR OVER 200' JIB; CRANE, TOWER CRANE ON RAIL SYSTEM OR 2ND TOWER OR MORE IN WORK RADIUS. (CLARK, COWLITX, KLICKITAT, PACIFIC (SOUTH), SKAMANIA, AND WAHKIAKUM COUNTIES). ZONE DIFFERENTIALS (ADD TO ZONE 1 RATES). ZONE 1: BASE RATE. ZONE 2: $3.00. ZONE 3: $6.00. FOR THE FOLLOWING METROPOLITAN COUNTIES: MULTNOMAH; CLACKAMAS; MARION; WASHINGTON; YAMHILL; AND COLUMBIA; CLARK; AND COWLITZ COUNTY, WASHINGTON WITH MODIFICATIONS AS INDICATED: ALL JOBS OR PROJECTS LOCATED IN MULTNOMAH, CLACKAMAS, AND MARION COUNTIES, WEST OF THE WESTERN OBUNDARY OF MT. HOOD NATIONAL FOREST AND WEST OF MILE POST 30 ON I-84 AND WEST OF MILE POST 30 ON STATE HIGHWAY 26 AND WEST OF MILE POST 30 ON HIGHWAY 22 AND ALL JOBS OR PROJECTS LOCATED IN YAMHILL COUNTY, WASHINGTON COUNTY, AND COLUMBIA COUNTY AND ALL JOBS OR PROJECTS LOCATED IN CLARK & COWLITZ COUNTY IN THE MT. ST. HELENS ""BLAST ZONE"" SHALL RECEIVE ZONE 1 PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED IN THE AREA OUTSIDE THE IDENTIFIED BOUNDARY ABOVE, BUT LESS THAN 50 MILES FROM THE PORTLAND CITY HALL SHALL RECEIVE ZONE II PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE THAN 50 MILES FROM THE PORTLAND CITY HALL, BUT OUTSIDE THE IDENTIFIED BORDER ABOVE, SHALL RECEIVE ZONE III PAY FOR ALL CLASSIFICATION. FOR THE FOLLOWING CITIES: ALBANY, BEND , COOS BAY, EUGENE, GRANTS PASS, KLAMATH FALLS, MEDFORD, AND ROSEBURG- ALL JOBS OR PROJECTS LOCATED WITHIN 30 MILES OF THE RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE ZONE 1 PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE THAN 30 MILES AND LESS THAN 50 MILES FROM THE RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE ZONE II PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE THAN 50 MILES FROM THE RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE
ZONE III PAY FOR ALL CLASSIFICATIONS.....$ 61.10 17.15
POWER EQUIPMENT OPERATOR: GROUP 1B- CRANE, 300 TON THROUGH 399 TON, WITH OVER 200' BOOM (INCLUDING JIB, INSERTS AND/OR ATTACHMENTS); FLOATING CRANE, 350 TON AND OVER; CRANE, 400 TON AND OVER. (CLARK, COWLITX, KLICKITAT, PACIFIC (SOUTH), SKAMANIA, AND WAHKIAKUM COUNTIES). ZONE DIFFERENTIALS (ADD TO ZONE 1 RATES). ZONE 1: BASE RATE. ZONE 2: $3.00. ZONE 3: $6.00. FOR THE FOLLOWING METROPOLITAN COUNTIES: MULTNOMAH; CLACKAMAS; MARION; WASHINGTON; YAMHILL; AND COLUMBIA; CLARK; AND COWLITZ COUNTY, WASHINGTON WITH MODIFICATIONS AS INDICATED: ALL JOBS OR PROJECTS LOCATED IN MULTNOMAH, CLACKAMAS,

AND MARION COUNTIES, WEST OF THE WESTERN OBUNDARY
OF MT. HOOD NATIONAL FOREST AND WEST OF MILE POST
30 ON I-84 AND WEST OF MILE POST 30 ON STATE
HIGHWAY 26 AND WEST OF MILE POST 30 ON HIGHWAY 22
AND ALL JOBS OR PROJECTS LOCATED IN YAMHILL COUNTY,
WASHINGTON COUNTY, AND COLUMBIA COUNTY AND ALL JOBS
OR PROJECTS LOCATED IN CLARK & COWLITZ COUNTY IN
THE MT. ST. HELENS ""BLAST ZONE"" SHALL RECEIVE ZONE
1 PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS
LOCATED IN THE AREA OUTSIDE THE IDENTIFIED BOUNDARY
ABOVE, BUT LESS THAN 50 MILES FROM THE PORTLAND
CITY HALL SHALL RECEIVE ZONE II PAY FOR ALL
CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE
THAN 50 MILES FROM THE PORTLAND CITY HALL, BUT
OUTSIDE THE IDENTIFIED BORDER ABOVE, SHALL RECEIVE
ZONE III PAY FOR ALL CLASSIFICATION. FOR THE
FOLLOWING CITIES: ALBANY, BEND , COOS BAY, EUGENE,
GRANTS PASS, KLAMATH FALLS, MEDFORD, AND ROSEBURG-
ALL JOBS OR PROJECTS LOCATED WITHIN 30 MILES OF THE
RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES
SHALL RECEIVE ZONE 1 PAY FOR ALL CLASSIFICATIONS.
ALL JOBS OR PROJECTS LOCATED MORE THAN 30 MILES AND
LESS THAN 50 MILES FROM THE RESPECTIVE CITY HALL OF
THE AFOREMENTIONED CITIES SHALL RECEIVE ZONE II PAY
FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS
LOCATED MORE THAN 50 MILES FROM THE RESPECTIVE CITY
HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE
ZONE III PAY FOR ALL CLASSIFICATIONS.....$ 63.26 17.15
POWER EQUIPMENT OPERATOR: GROUP 2- ASPHALT PLANT
(ANY TYPE); ASPHALT ROTO-MILL, PAVEMENT PROFILER 8'
LATERAL CUT AND OVER; AUTO GRADER OR ""TRIMMER"";
BLADE, ROBOTIC; BULLDOZER, ROBOTIC EQUIPMENT (ANY
TYPE); BULLDOZER, OVER 120,000 LBS. AND ABOVE;
CONCRETE BATCH PLANT AND/OR WET MIX 1 AND 2 DRUM;
CONCRETE DIAMOND HEAD PROFILER; CANAL TRIMMER;
CONCRETE, AUTOMATIC SLIP FORM PAVER (ASSISTANT TO
THE OPERATOR REQUIRED); CRANE, BOOM TRUCK 50 TON
AND WITH OVER 150' BOOM AND OVER; CRANE, FLOATING
(DERRICK BARGE) 30 TON BUT LESS THAN 150 TON;
CRANE, CABLEWAY 25 TON AND OVER; CRANE, FLOATING
CLAMSHELL 3 CU. YDS. AND OVER; CRANE, 90 TON
THROUGH 199 TON UP TO AND INCLUDING 200' OF BOOM
(INCLUDING JIB INSERTS AND/OR ATTACHMENTS); CRANE,
50 TON THROUGH 89 TON WITH OVER 150' BOOM
(INCLUDING JIB INSERTS AND/OR ATTACHMENTS); CRANE,
WHIRLEY UNDER 90 TON; CRUSHER PLANT; EXCAVATOR OVER
130,000 LBS.; LOADER 120,000 LBS. AND ABOVE; REMOTE
CONTROLLED EARTH MOVING EQUIPMENT; SHOVEL,
DRAGLINE, CLAMSHELL, 5 CU. YDS. AND OVER;
UNDERWATER EQUIPMENT REMOTE OR OTHERWISE, WHEN USED
IN CONSTRUCTION WORK; WHEEL EXCAVATOR ANY SIZE.
(CLARK, COWLITX, KLICKITAT, PACIFIC (SOUTH),
SKAMANIA, AND WAHKIAKUM COUNTIES). ZONE
DIFFERENTIALS (ADD TO ZONE 1 RATES). ZONE 1: BASE
RATE. ZONE 2: $3.00. ZONE 3: $6.00. FOR THE
FOLLOWING METROPOLITAN COUNTIES: MULTNOMAH;

CLACKAMAS; MARION; WASHINGTON; YAMHILL; AND
COLUMBIA; CLARK; AND COWLITZ COUNTY, WASHINGTON
WITH MODIFICATIONS AS INDICATED: ALL JOBS OR
PROJECTS LOCATED IN MULTNOMAH, CLACKAMAS, AND
MARION COUNTIES, WEST OF THE WESTERN OBUNDARY OF
MT. HOOD NATIONAL FOREST AND WEST OF MILE POST 30
ON I-84 AND WEST OF MILE POST 30 ON STATE HIGHWAY
26 AND WEST OF MILE POST 30 ON HIGHWAY 22 AND ALL
JOBS OR PROJECTS LOCATED IN YAMHILL COUNTY,
WASHINGTON COUNTY, AND COLUMBIA COUNTY AND ALL JOBS
OR PROJECTS LOCATED IN CLARK & COWLITZ COUNTY IN
THE MT. ST. HELENS ""BLAST ZONE"" SHALL RECEIVE ZONE
1 PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS
LOCATED IN THE AREA OUTSIDE THE IDENTIFIED BOUNDARY
ABOVE, BUT LESS THAN 50 MILES FROM THE PORTLAND
CITY HALL SHALL RECEIVE ZONE II PAY FOR ALL
CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE
THAN 50 MILES FROM THE PORTLAND CITY HALL, BUT
OUTSIDE THE IDENTIFIED BORDER ABOVE, SHALL RECEIVE
ZONE III PAY FOR ALL CLASSIFICATION. FOR THE
FOLLOWING CITIES: ALBANY, BEND , COOS BAY, EUGENE,
GRANTS PASS, KLAMATH FALLS, MEDFORD, AND ROSEBURG-
ALL JOBS OR PROJECTS LOCATED WITHIN 30 MILES OF THE
RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES
SHALL RECEIVE ZONE 1 PAY FOR ALL CLASSIFICATIONS.
ALL JOBS OR PROJECTS LOCATED MORE THAN 30 MILES AND
LESS THAN 50 MILES FROM THE RESPECTIVE CITY HALL OF
THE AFOREMENTIONED CITIES SHALL RECEIVE ZONE II PAY
FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS
LOCATED MORE THAN 50 MILES FROM THE RESPECTIVE CITY
HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE
ZONE III PAY FOR ALL CLASSIFICATIONS.....$ 57.03 17.15
POWER EQUIPMENT OPERATOR: GROUP 3- BULLDOZER, OVER
70,000 LBS. UP TO AND INCLUDING 120,000 LBS.;
CRANE, BOOM TRUCK 50 TON AND OVER WITH LESS THAN
150' BOOM; CRANE, 50 TON THROUGH 89 TON WITH 150'
BOOM OR LESS (INCLUDING JIB INSERTS AND/OR
ATTACHMENTS); CRANE, SHOVEL, DRAGLINE OR CLAMSHELL
3 CU. YDS. BUT LESS THAN 5 CU. YDS.; EXCAVATOR OVER
80,000 LBS. THROUGH 130.000 LBS.; LOADER 60,000
LBS. AND LESS THAN 120,000 LBS. (CLARK, COWLITX,
KLICKITAT, PACIFIC (SOUTH), SKAMANIA, AND WAHKIAKUM
COUNTIES). ZONE DIFFERENTIALS (ADD TO ZONE 1
RATES). ZONE 1: BASE RATE. ZONE 2: $3.00. ZONE 3:
$6.00. FOR THE FOLLOWING METROPOLITAN COUNTIES:
MULTNOMAH; CLACKAMAS; MARION; WASHINGTON; YAMHILL;
AND COLUMBIA; CLARK; AND COWLITZ COUNTY, WASHINGTON
WITH MODIFICATIONS AS INDICATED: ALL JOBS OR
PROJECTS LOCATED IN MULTNOMAH, CLACKAMAS, AND
MARION COUNTIES, WEST OF THE WESTERN OBUNDARY OF
MT. HOOD NATIONAL FOREST AND WEST OF MILE POST 30
ON I-84 AND WEST OF MILE POST 30 ON STATE HIGHWAY
26 AND WEST OF MILE POST 30 ON HIGHWAY 22 AND ALL
JOBS OR PROJECTS LOCATED IN YAMHILL COUNTY,
WASHINGTON COUNTY, AND COLUMBIA COUNTY AND ALL JOBS
OR PROJECTS LOCATED IN CLARK & COWLITZ COUNTY IN

THE MT. ST. HELENS ""BLAST ZONE"" SHALL RECEIVE ZONE 1 PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED IN THE AREA OUTSIDE THE IDENTIFIED BOUNDARY ABOVE, BUT LESS THAN 50 MILES FROM THE PORTLAND CITY HALL SHALL RECEIVE ZONE II PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE THAN 50 MILES FROM THE PORTLAND CITY HALL, BUT OUTSIDE THE IDENTIFIED BORDER ABOVE, SHALL RECEIVE ZONE III PAY FOR ALL CLASSIFICATION. FOR THE FOLLOWING CITIES: ALBANY, BEND , COOS BAY, EUGENE, GRANTS PASS, KLAMATH FALLS, MEDFORD, AND ROSEBURG- ALL JOBS OR PROJECTS LOCATED WITHIN 30 MILES OF THE RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE ZONE 1 PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE THAN 30 MILES AND LESS THAN 50 MILES FROM THE RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE ZONE II PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE THAN 50 MILES FROM THE RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE ZONE III PAY FOR ALL CLASSIFICATIONS.....$ 55.88 17.15

POWER EQUIPMENT OPERATOR: GROUP 4- ASPHALT, SCREED; ASPHALT PAVER; ASPHALT ROTO-MILL, PAVEMENT PROFILER, UNDER 8' LATERAL CUT; ASPHALT, MATEIRLA TRANSFER VEHICLE OPERATOR; BACK FILLING MACHINE; BACKHOE, ROBOTIC, TRACK AND WHEEL TYPE UP TO AND INCLUDING 20,000 LBS. WITH ANY ATTACHMENTS; BLADE (ANY TYPE); BOATMAN; BORING MACHINE; BULLDOZER OVER 20,000 LBS. AND MORE THAN 100 HORSE UP TO 70,000 LBS.; CABLE-PLOW (ANY TYPE); CABLEWAY UP TO 25 TON; CAT DRILL (JOHN HENRY); CHIPPERS; COMPACTOR, MULTI-ENGINE; COMPACTOR, ROBOTIC; COMPACTOR WITH BLAD SELF-PROPELLED; CONCRETE, BREAKER; CONCRETE, GROUT PLANT; CONCRETE, MIXER MOBILE; CONCRETE, PAVING ROAD MIXER; CONCRETE, REINFORCED TANK BANDING MACHINE; CRANE, BOOM TRUCK 20 TON AND UNDER 50 TON; CRANE, BRIDGE LOCOMOTIVE, GANTRY AND OVERHEAD; CRANE, CARRY DECK; CRANE, CHICAGO BOOM AND SIMILAR TYPES; CRANE, DERRICK OPERATOR UNDER 100 TON; CRANE, FLOATING CLAMSHELL, DRAGLINE, ETC. OPERATOR, UNDER 3 CU. YDS. OR LESS THAN 30 TON; CRANE, UNDER 50 TON; CRANE, QUICK TOWER UNDER 100' IN HEIGHT AND LESS THAN 150' JIB (ON RAIL INCLUDED); DIESEL-ELECTRIC ENGINEER (PLANT OR FLOATING); DIRECTIONAL DRILL OVER 20,000 LBS. PULLBACK; DRILL CAT OPERATOR; DRILL DOCTOR AND/OR BIT GRINDER; DRILLER, PERCUSSION, DIAMOND, CORE, CABLE, ROTARY AND SIMILAR TYPE; EXCAVATOR OPERATOR OVER 20,000 LBS. THROUGH 80,000 LBS.; GENERATOR OPERATOR; GRADE-ALL; GUARDRAIL MACHINES, I.E. PUNCH, AUGER, ETC.' HAMMER OPERATOR (PILEDRIVER); HOIST, STIFF LEG, GUY DERRICK OR SIMILAR TYPE, 50 TON AND OVER; HOIST, 2 DRUMS OR MORE; HYDRO AXE (LOADER MOUNTED OR SIMILA TYPE); JACK OPERATOR, ELEVATING BARGES, BARGE OPERATOR, SELF-UNLOADING; LOADER OPERATOR, FRONT END AND OVERHEAD, 25,000

LBS. AND LESS THAN 60,000 LBS.; LOG SKIDDERS; PILEDRIVER OPERATOR (NOT CRANE TYPE); PIPE, BENDING, CLEANING, DOPING AND WRAPPING MACHINES; RAIL, BALLAST TAMPER MULTI-PURPOSE; RUBBER-TIRED DOZERS AND PUSHERS; SCRAPER, ALL TYPES; SIDE-BOOM; SKIP LOADER, DRAG BOX; STRUMP GRINDER (LOADER MOUNTED OR SIMILAR TYPE); SURFACE HEATER AND PLANER; TRACTOR, RUBBER-TIRED, OVER 50 HP FLYWHEEL; TRENCHING MACHINE 3' DEPTH AND DEEPER; TUB GRINDER (USED FOR WOOD DEBRIS); TUNNEL BORING MACHINE MECHANIC; TUNNEL, MUCKING MACHINE; ULTRA HIGH PRESSURE WATER JET CUTTING TOOL SYSTEM OPERATOR; VACUUM BLASTING MACHINE OPERATOR; WATER PULLS, WATER WAGONS. (CLARK, COWLITX, KLICKITAT, PACIFIC (SOUTH), SKAMANIA, AND WAHKIAKUM COUNTIES). ZONE DIFFERENTIALS (ADD TO ZONE 1 RATES). ZONE 1: BASE RATE. ZONE 2: $3.00. ZONE 3: $6.00. FOR THE FOLLOWING METROPOLITAN COUNTIES: MULTNOMAH; CLACKAMAS; MARION; WASHINGTON; YAMHILL; AND COLUMBIA; CLARK; AND COWLITZ COUNTY, WASHINGTON WITH MODIFICATIONS AS INDICATED: ALL JOBS OR PROJECTS LOCATED IN MULTNOMAH, CLACKAMAS, AND MARION COUNTIES, WEST OF THE WESTERN OBUNDARY OF MT. HOOD NATIONAL FOREST AND WEST OF MILE POST 30 ON I-84 AND WEST OF MILE POST 30 ON STATE HIGHWAY 26 AND WEST OF MILE POST 30 ON HIGHWAY 22 AND ALL JOBS OR PROJECTS LOCATED IN YAMHILL COUNTY, WASHINGTON COUNTY, AND COLUMBIA COUNTY AND ALL JOBS OR PROJECTS LOCATED IN CLARK & COWLITZ COUNTY IN THE MT. ST. HELENS ""BLAST ZONE"" SHALL RECEIVE ZONE 1 PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED IN THE AREA OUTSIDE THE IDENTIFIED BOUNDARY ABOVE, BUT LESS THAN 50 MILES FROM THE PORTLAND CITY HALL SHALL RECEIVE ZONE II PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE THAN 50 MILES FROM THE PORTLAND CITY HALL, BUT OUTSIDE THE IDENTIFIED BORDER ABOVE, SHALL RECEIVE ZONE III PAY FOR ALL CLASSIFICATION. FOR THE FOLLOWING CITIES: ALBANY, BEND , COOS BAY, EUGENE, GRANTS PASS, KLAMATH FALLS, MEDFORD, AND ROSEBURG- ALL JOBS OR PROJECTS LOCATED WITHIN 30 MILES OF THE RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE ZONE 1 PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE THAN 30 MILES AND LESS THAN 50 MILES FROM THE RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE ZONE II PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE THAN 50 MILES FROM THE RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE ZONE III PAY FOR ALL CLASSIFICATIONS.....$ 52.55 17.15

POWER EQUIPMENT OPERATOR: GROUP 5- ASPHALT, EXTRUSION MACHINE; ASPHALT, ROLLER (ANY ASPHALT MIX); ASPHALT, ROTO-MILL PAVEMENT PROFILER GROUND MAN; BULLDOZER, 20,000 LBS. OR LESS, OR 100 HORSE OR LESS; CEMENT PUMP; CHIP SPREADING MACHINE; CHURN DRILL AND EARTH BORING MACHINE; COMPACTOR,

SELF-PROPELLED WITHOUT BLADE; COMPRESSOR, (ANY POWER) 1,250 CU. FT. AND OVER, TOTAL CAPACITY; CONCRETE, BATCH PLANT QUALITY CONTROL; CONCRETE, COMBINATION MIXER AND COMPRESSOR OPERATOR, GUNITE WORK; CONCRETE, CURB MACHINE, MECHANICAL BERM, CURB AND/OR CURB AND GUTTER; CONCRETE, FINISHING MACHINE; CONCRETE, GROUTING MACHINE; CONCRETE, INTERNAL FULL SLAB VIBRATOR OPERATOR; CONCRETE, JOINT MACHINE; CONCRETE, MIXER SINGLE DRUM, ANDY CAPACITY; CONCRETE, PAVING MACHINE 8' OR LESS; CONCRETE, PLANER; CONCRETE, PUMP; CONCRETE, PUMP TRUCK; CONCRETE, PUMPCRETE OPERATOR (ANY TYPE); CONCRETE, SLIP FORM PUMPS, POWER DRIVEN HYDRAULIC LIFTING DEVICE FOR CONCRETE FORMS; CONVEYORED MATERIAL HANDLER; CRANE, BOOM TRUCK UNDER 20 TONS; CRANE, BOOM TYPE LIFTING DEVICE, 5 TON CAPACITY OR LESS; DRILL, DIRECTIONAL TYPE LESS THAN 20,000 LBS. PULLBACK; FORM LIFT, OVER 10 TON OR ROBOTIC; HELICOPTER HOIST; HOIST OPERATOR, SINGLE DRUM; HYDRAULIC BACKHOE TRACK TYPE UP TO AND INCLUDING 20,000 LBS.; HYDRAUIC BACKHOE WHEEL TYPE (ANY MAKE); LASER SCREED; LOADERS, RUBBER-TIRED TYPE, LESS THAN 25,000 LBS.; PAVEMENT GRINDER AND/OR GROOVING MACHINE (RIDING TYPE); PIPE, CAST IN PLACE PIPE LAYING MACHINE; PULVA-MIXER OR SIMILAR TYPES; PUMP OPERATOR, MORE THAN 5 PUMPS (ANY SIZE); RAIL, BALLAST COMPACTOR, REGULATOR, OR TAMPER MACHINES; SERVICE OILER (GREASER); SWEEPER SELF-PROPELLED; TRACTOR, RUBBER-TIRED, 50 HP FLYWHEEL AND UNDER; TRENCHING MACHINE OPERATOR, MAXIMUM DIGGING CAPACITY 3' DEPTH; TUNNEL, LOCOMOTIVE, DINKEY; TUNNEL, POWER JUMBO SETTING SLIP FORMS, ETC. (CLARK, COWLITX, KLICKITAT, PACIFIC (SOUTH), SKAMANIA, AND WAHKIAKUM COUNTIES). ZONE DIFFERENTIALS (ADD TO ZONE 1 RATES). ZONE 1: BASE RATE. ZONE 2: $3.00. ZONE 3: $6.00. FOR THE FOLLOWING METROPOLITAN COUNTIES: MULTNOMAH; CLACKAMAS; MARION; WASHINGTON; YAMHILL; AND COLUMBIA; CLARK; AND COWLITZ COUNTY, WASHINGTON WITH MODIFICATIONS AS INDICATED: ALL JOBS OR PROJECTS LOCATED IN MULTNOMAH, CLACKAMAS, AND MARION COUNTIES, WEST OF THE WESTERN OBUNDARY OF MT. HOOD NATIONAL FOREST AND WEST OF MILE POST 30 ON I-84 AND WEST OF MILE POST 30 ON STATE HIGHWAY 26 AND WEST OF MILE POST 30 ON HIGHWAY 22 AND ALL JOBS OR PROJECTS LOCATED IN YAMHILL COUNTY, WASHINGTON COUNTY, AND COLUMBIA COUNTY AND ALL JOBS OR PROJECTS LOCATED IN CLARK & COWLITZ COUNTY IN THE MT. ST. HELENS ""BLAST ZONE"" SHALL RECEIVE ZONE 1 PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED IN THE AREA OUTSIDE THE IDENTIFIED BOUNDARY ABOVE, BUT LESS THAN 50 MILES FROM THE PORTLAND CITY HALL SHALL RECEIVE ZONE II PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE THAN 50 MILES FROM THE PORTLAND CITY HALL, BUT OUTSIDE THE IDENTIFIED BORDER ABOVE, SHALL RECEIVE

ZONE III PAY FOR ALL CLASSIFICATION. FOR THE
FOLLOWING CITIES: ALBANY, BEND , COOS BAY, EUGENE,
GRANTS PASS, KLAMATH FALLS, MEDFORD, AND ROSEBURG-
ALL JOBS OR PROJECTS LOCATED WITHIN 30 MILES OF THE
RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES
SHALL RECEIVE ZONE 1 PAY FOR ALL CLASSIFICATIONS.
ALL JOBS OR PROJECTS LOCATED MORE THAN 30 MILES AND
LESS THAN 50 MILES FROM THE RESPECTIVE CITY HALL OF
THE AFOREMENTIONED CITIES SHALL RECEIVE ZONE II PAY
FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS
LOCATED MORE THAN 50 MILES FROM THE RESPECTIVE CITY
HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE
ZONE III PAY FOR ALL CLASSIFICATIONS.....$ 51.31 17.15
POWER EQUIPMENT OPERATOR: GROUP 6- ASPHALT, PUGMILL
(ANY TYPES); ASPHALT, RAKER; ASPHALT, TRUCK MOUNTED
ASPHALT SPREADER, WITH SCREED; SUGER OILER;
BOATMAN; BOBCAT, SKID STEER (LESS THAN 1 YRD);
BROOM, SELF-PROPELLED; COMPRESSOR OPERATOR (ANY
POWER) UNDER 1,250 CU. FT. TOTAL CAPACITY; CONCRETE
CURING MACHINE (RIDING TYPE); CONCRETE SAW;
CONVEYOR OPERATOR OR ASSISTANT; CRANE, TUGGER;
CRUSHER FEEDERMAN; CRUSHER OILER; DECKHAND; DRILL,
DIRECTIONAL LOCATOR; FORK LIFT; GRADE CHECKER;
GUARDRAIL PUNCHOILER; HUDROGRAPHIC SEEDER MACHINE,
STRAW, PULP OR SEED; HYDROSTATIC PUMP OPERATOR;
MIXER BOX (CTB, DRY BATCH, ETC.); OILER; PLANT
OILER; PUMP (ANY POWER); RAIL, BRAKEMAN, SWITCHMAN,
MOTORMAN; RAIL, TAMPING MACHINE, MECHANICAL,
SELF-PROPELLED; RIGGER; ROLLER GRADING (NOT
ASPHALT); TRUCK, CRANE OILER-DRIVER. (CLARK,
COWLITX, KLICKITAT, PACIFIC (SOUTH), SKAMANIA, AND
WAHKIAKUM COUNTIES). ZONE DIFFERENTIALS (ADD TO
ZONE 1 RATES). ZONE 1: BASE RATE. ZONE 2: $3.00.
ZONE 3: $6.00. FOR THE FOLLOWING METROPOLITAN
COUNTIES: MULTNOMAH; CLACKAMAS; MARION; WASHINGTON;
YAMHILL; AND COLUMBIA; CLARK; AND COWLITZ COUNTY,
WASHINGTON WITH MODIFICATIONS AS INDICATED: ALL
JOBS OR PROJECTS LOCATED IN MULTNOMAH, CLACKAMAS,
AND MARION COUNTIES, WEST OF THE WESTERN OBUNDARY
OF MT. HOOD NATIONAL FOREST AND WEST OF MILE POST
30 ON I-84 AND WEST OF MILE POST 30 ON STATE
HIGHWAY 26 AND WEST OF MILE POST 30 ON HIGHWAY 22
AND ALL JOBS OR PROJECTS LOCATED IN YAMHILL COUNTY,
WASHINGTON COUNTY, AND COLUMBIA COUNTY AND ALL JOBS
OR PROJECTS LOCATED IN CLARK & COWLITZ COUNTY IN
THE MT. ST. HELENS ""BLAST ZONE"" SHALL RECEIVE ZONE
1 PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS
LOCATED IN THE AREA OUTSIDE THE IDENTIFIED BOUNDARY
ABOVE, BUT LESS THAN 50 MILES FROM THE PORTLAND
CITY HALL SHALL RECEIVE ZONE II PAY FOR ALL
CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE
THAN 50 MILES FROM THE PORTLAND CITY HALL, BUT
OUTSIDE THE IDENTIFIED BORDER ABOVE, SHALL RECEIVE
ZONE III PAY FOR ALL CLASSIFICATION. FOR THE
FOLLOWING CITIES: ALBANY, BEND , COOS BAY, EUGENE,
GRANTS PASS, KLAMATH FALLS, MEDFORD, AND ROSEBURG-

ALL JOBS OR PROJECTS LOCATED WITHIN 30 MILES OF THE RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE ZONE 1 PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE THAN 30 MILES AND LESS THAN 50 MILES FROM THE RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE ZONE II PAY FOR ALL CLASSIFICATIONS. ALL JOBS OR PROJECTS LOCATED MORE THAN 50 MILES FROM THE RESPECTIVE CITY HALL OF THE AFOREMENTIONED CITIES SHALL RECEIVE ZONE III PAY FOR ALL CLASSIFICATIONS.....$ 48.09 17.15

IRON0014-005 07/07/2025

	Rates	Fringes
IRONWORKER (ADAMS, ASOTIN, BENTON, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT, LINCOLN, OKANOGAN, PEND ORIELLE, SPOKANE, STEVENS, WALLA WALLA, AND WHITMAN COUNTIES).....	$ 43.40	32.77

IRON0029-002 07/07/2025

	Rates	Fringes
IRONWORKER (CLARK, COWLITZ, KLICKITAT, PACIFIC, SKAMANIA, AND WAHKAIKUM COUNTIES).....	$ 48.31	34.52

IRON0086-002 07/07/2025

	Rates	Fringes
IRONWORKER (YAKIMA, KITTITAS AND CHELAN COUNTIES)...	$ 43.40	32.77

IRON0086-004 07/07/2025

	Rates	Fringes
IRONWORKER (CLALLAM, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS, MASON, PIERCE, SKAGIT, SNOHOMISH, THURSTON, AND WHATCOME COUNTIES).	$ 57.94	34.52

LABO0238-004 06/01/2025

	Rates	Fringes
LABORER: GROUP 1, AREA A-1 - FLAGMAN; LANDSCAPE LABORER; SCALEMAN; TRAFFIC CONTROL MAINTENANCE LABORER (TO INCLUDE ERECTION AND MAINTENANCE OF BARRICADES, SIGNS AND RELIEF OF FLAGPERSON); WINDOW WASHER/CLEANER (DETAIL CLEANUP, SUCH AS, BUT NOT LIMITED TO CLEANING FLOORS, CEILINGS, WALLS, WINDOWS, ETC. PRIOR TO FINAL ACCEPTANCE BY THE OWNER) (A-1 AREA: ASOTIN, BENTON, FRANKLIN, GARFIELD, LINCOLN, SPOKANE, WALLA WALLA, AND WHITMAN COUNTIES).....	$ 34.03	16.90
LABORER: GROUP 2, AREA A-1 - ASBESTOS ABATEMENT WORKER; BRUSH HOG FEEDER; CARPENTER TENDER; CEMENT HANDLER; CLEAN-UP LABORER; CONCRETE CREWMAN (TO INCLUDE STRIPPING OF FORMS, HAND OPERATING JACKS ON SLIP FORM CONSTRUCTION, APPLICATION OF CONCRETE CURING COMPOUNDS, PUMPCRETE MACHINE, SIGNALING,		

HANDLIGN THE NOZZLE OF SQUEEZCRETE OR SIMILAR
MACHINE, 6 INCHES AND SMALLER); CONFINED SPACE
ATTENDANT; CONCRETE SIGNALMAN; CRUSHER FEEDER;
DEMOLITION (TO INCLUDE CLEAN-UP, CURNING, LOADING,
WRECKING AND SALVAGE OF ALL MATERIAL); DUMPMAN;
FENCE ERECTOR; FIREWATCH; FORM CLEANING MACHINE
FEEDER, STACKER, GENERAL LABORER; GROUT MACHINE
HEADER TENDER; GUARD RAIL (TO INCLUDE GUARD RAILS,
GUIDE AND REFERENCE POSTS, SIGN POSTS, AND
RIGHT-OF-WAY MARKERS); HAZARDOUS WASTE WORKER,
LEVEL D (NO RESPIRATOR IS USED AND SKIN PROTECTION
IS MINIMAL); MINER, CLASS ""A"" (TO INCLUDE ALL BULL
GANG, CONCRETE CREWMAN, DUMPAN AND PUMPCRETE
CREWMAN, INCLUDING DISTRIBUTING PIPE, ASSEMBLY &
DISMANTLE, AND NIPPER), NIPPER; RIPRAP MAN;
SANDBLAST TAILHOSEMAN; SCAFFOLD ERECTOR (WOOD OR
STEEL); STAKE JUMPER; STRUCTURAL MOVER (TO INCLUDE
SEPARATING FOUNDATION, PREPARATION, CRIBBING,
SHORING, JACKING AND UNLOADING OF STRUCTURES);
TAILHOSEMAN (WATER NOZZLE); TIMBER BUCKER AND
FALLER (BY HAND); TRACK LABORER (RR); TRUCK LOADER;
WELL-POINT MAN; ALL OTHER WORK CLASSIFICATIONS NOT
SPECIFICALLY LISTED SHALL BE CLASSIFIED AS GENERAL
LABORER. (A-1 AREA: ASOTIN, BENTON, FRANKLIN,
GARFIELD, LINCOLN, SPOKANE, WALLA WALLA, AND
WHITMAN COUNTIES).....$ 37.13 16.90
LABORER: GROUP 3, AREA A-1 - ASPHALT ROLLER,
WALKING; CEMENT FINISHER TENDER; CONCRETE SAW,
WALKING; DEMOLITION TORCH; DOPE POT FIREMEN,
NON-MECHANICAL; DRILLER TENDER (WHEN REQUIRED TO
MOVE AND POSITION MACHINE); FORM SETTER, PAVING;
GRADE CHECKER USING LEVEL; HAZARDOUS WASTE WORKER,
LEVEL C (USES A CHEMICAL ""SPLASH SUIT"" AND AIR
PURIFYING RESPIRATOR); JACKHAMMER OPERATOR; MINER,
CLASS ""B"" (TO INCLUDE BRAKEMAN, FINISHER, VIBRATOR,
FORM SETTER); NOZZLEMAN (TO INCLUDE SQUEEZE AND
FLO-CRETE NOAZZLE); NOZZLEMAN, WATER, AIR OR STEAM;
PAVEMENT BREAKER (UNDER 90 LBS.); PIPELAYER,
CORRUGATED METAL CULVERT; PIPELAYER, MULTI-PLATE;
POT TENDER; POWER BUGGY OPERATOR; POWER TOOL
OPERATOR, GAS, ELECTRIC, PNEUMATIC; RAILROAD
EQUIPMENT, POWER DRIVEN, EXCEPT DUAL MOBILE POWER
SPIKER OR PULLER; RAILROAD POWER SPIKER OR PULLER,
DUAL MOBILE; RODDER AND SPREADER; TAMPER (TO
INCLUDE OPERATION OF BARCO, ESSEX AND SIMILAR
TAMPERS); TRENCHER, SHAWNEE; TUGGER OPERATOR; WAGON
DRILLS; WATER PIPE LINER; WHEELBARROW (POWER
DRIVEN). (A-1 AREA: ASOTIN, BENTON, FRANKLIN,
GARFIELD, LINCOLN, SPOKANE, WALLA WALLA, AND
WHITMAN COUNTIES).....$ 37.46 16.90
LABORER: GROUP 4, AREA A-1 - AIR AND HYDRAULIC
TRACK DRILL; ASPHALT RAKER; BRUSH MACHINE (TO
INCLUDE HORIZONTAL CONSTRUCTION JOINT CLEANUP BRUSH
MACHINE, POWER PROPELLED); CAISSON WORKER, FREE
AIR; CHAIN SAW OPERATOR AND FALLER; CONCRETE STACK
(TO INCLUDE LABORERS WHEN LABORERS WORKING ON FREE

STANDING CONCRETE STACKS FOR SMOKE OR FUME CONTROL
ABOVE 40 FEET HIGH); GUNITE (TO INCLUDE OPERATION
OF MACHINE AND NOZZLE); HAZARDOUS WASTE WORKER,
LEVEL B (USES SAME RESPIRATOR PROTECTION AS LEVEL
A. A SUPPLIED AIR LINE IS PROVIDED IN CONJUNCTION
WITH A CHEMICAL ""SPLASH SUIT""); HIGH SCALER; LASER
BEAM OPERATOR (TO INLCUDE GRADE CHECKER AND
ELEVATION CONTROL); MINER, CLASS C (TO INCLUDE
MINER, NOZZLEMAN FOR CONCRETE, LASER BEAM OPERATOR
AND RIGGER ON TUNNELS); MONITOR OPERATOR (AIR TRACK
OR SIMILAR MOUNTING); MORTAR MIXER; NOZZLEMAN (TO
INCLUDE JET BLASTING NOZZLEMAN, OVER 1,200 LBS.,
JET BLAST MACHINE POWER PROPELLED, SANDBLAST
NOZZLE); PAVEMENT BREAKER (90 LBS. AND OVER);
PIPELAYER (TO INCLUDE WORKING TOPMAN, CAULKER,
COLLARMAN, JOINTER, MORTARMAN, RIGGER, JACKER,
SHORER, VALVE OR METER INSTALLER); PIPEWRAPPER;
PLASTERER TENDER; VIBRATORS (ALL). (A-1 AREA:
ASOTIN, BENTON, FRANKLIN, GARFIELD, LINCOLN,
SPOKANE, WALLA WALLA, AND WHITMAN COUNTIES).....$ 37.80 16.90
LABORER: GROUP 5, AREA A-1 - DRILLS WITH DUAL
MASTS: HAZARDOUS WASTE WORKER, LEVEL A (UTILIZES A
FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED
BREATHING APPARATUS OR A SUPPLIED AIR LINE); MINER
CLASS ""D"", TO INCLUDE RAISE AND SHAFT MINER, LASER
BEAM OPERATOR ON RAISES AND SHAFTS). (A-1 AREA:
ASOTIN, BENTON, FRANKLIN, GARFIELD, LINCOLN,
SPOKANE, WALLA WALLA, AND WHITMAN COUNTIES A-2
AREA: ADAMS,COLUMBIA,DOUGLAS (EAST OF 120TH
MERIDIAN), FERRY, GRANT, OKANOGAN, PEND OREILLE,
AND STEVENS COUNTIES).....$ 38.14 16.90
LABORER: GROUP 1, AREA A-2 - FLAGMAN; LANDSCAPE
LABORER; SCALEMAN; TRAFFIC CONTROL MAINTENANCE
LABORER (TO INCLUDE ERECTION AND MAINTENANCE OF
BARRICADES, SIGNS AND RELIEF OF FLAGPERSON); WINDOW
WASHER/CLEANER (DETAIL CLEANUP, SUCH AS, BUT NOT
LIMITED TO CLEANING FLOORS, CEILINGS, WALLS,
WINDOWS, ETC. PRIOR TO FINAL ACCEPTANCE BY THE
OWNER) (A-2 AREA: ADAMS, COLUMBIA, DOUGLAS (EAST OF
120TH MERIDIAN), FERRY, GRANT, OKANOGAN, PEND
OREILLE, AND STEVENS COUNTIES).....$ 37.03 16.90
LABORER: GROUP 2, AREA A-2 - ASBESTOS ABATEMENT
WORKER; BRUSH HOG FEEDER; CARPENTER TENDER; CEMENT
HANDLER; CLEAN-UP LABORER; CONCRETE CREWMAN (TO
INCLUDE STRIPPING OF FORMS, HAND OPERATING JACKS ON
SLIP FORM CONSTRUCTION, APPLICATION OF CONCRETE
CURING COMPOUNDS, PUMPCRETE MACHINE, SIGNALING,
HANDLIGN THE NOZZLE OF SQUEEZCRETE OR SIMILAR
MACHINE, 6 INCHES AND SMALLER); CONFINED SPACE
ATTENDANT; CONCRETE SIGNALMAN; CRUSHER FEEDER;
DEMOLITION (TO INCLUDE CLEAN-UP, CURNING, LOADING,
WRECKING AND SALVAGE OF ALL MATERIAL); DUMPMAN;
FENCE ERECTOR; FIREWATCH; FORM CLEANING MACHINE
FEEDER, STACKER, GENERAL LABORER; GROUT MACHINE
HEADER TENDER; GUARD RAIL (TO INCLUDE GUARD RAILS,
GUIDE AND REFERENCE POSTS, SIGN POSTS, AND

RIGHT-OF-WAY MARKERS); HAZARDOUS WASTE WORKER,
LEVEL D (NO RESPIRATOR IS USED AND SKIN PROTECTION
IS MINIMAL); MINER, CLASS ""A"" (TO INCLUDE ALL BULL
GANG, CONCRETE CREWMAN, DUMPAN AND PUMPCRETE
CREWMAN, INCLUDING DISTRIBUTING PIPE, ASSEMBLY &
DISMANTLE, AND NIPPER), NIPPER; RIPRAP MAN;
SANDBLAST TAILHOSEMAN; SCAFFOLD ERECTOR (WOOD OR
STEEL); STAKE JUMPER; STRUCTURAL MOVER (TO INCLUDE
SEPARATING FOUNDATION, PREPARATION, CRIBBING,
SHORING, JACKING AND UNLOADING OF STRUCTURES);
TAILHOSEMAN (WATER NOZZLE); TIMBER BUCKER AND
FALLER (BY HAND); TRACK LABORER (RR); TRUCK LOADER;
WELL-POINT MAN; ALL OTHER WORK CLASSIFICATIONS NOT
SPECIFICALLY LISTED SHALL BE CLASSIFIED AS GENERAL
LABORER.(A-2 AREA: ADAMS,COLUMBIA,DOUGLAS (EAST OF
120TH MERIDIAN), FERRY, GRANT, OKANOGAN, PEND
OREILLE, AND STEVENS COUNTIES).....$ 40.13 16.90
LABORER: GROUP 3, AREA A-2 - ASPHALT ROLLER,
WALKING; CEMENT FINISHER TENDER; CONCRETE SAW,
WALKING; DEMOLITION TORCH; DOPE POT FIREMEN,
NON-MECHANICAL; DRILLER TENDER (WHEN REQUIRED TO
MOVE AND POSITION MACHINE); FORM SETTER, PAVING;
GRADE CHECKER USING LEVEL; HAZARDOUS WASTE WORKER,
LEVEL C (USES A CHEMICAL ""SPLASH SUIT"" AND AIR
PURIFYING RESPIRATOR); JACKHAMMER OPERATOR; MINER,
CLASS ""B"" (TO INCLUDE BRAKEMAN, FINISHER, VIBRATOR,
FORM SETTER); NOZZLEMAN (TO INCLUDE SQUEEZE AND
FLO-CRETE NOAZZLE); NOZZLEMAN, WATER, AIR OR STEAM;
PAVEMENT BREAKER (UNDER 90 LBS.); PIPELAYER,
CORRUGATED METAL CULVERT; PIPELAYER, MULTI-PLATE;
POT TENDER; POWER BUGGY OPERATOR; POWER TOOL
OPERATOR, GAS, ELECTRIC, PNEUMATIC; RAILROAD
EQUIPMENT, POWER DRIVEN, EXCEPT DUAL MOBILE POWER
SPIKER OR PULLER; RAILROAD POWER SPIKER OR PULLER,
DUAL MOBILE; RODDER AND SPREADER; TAMPER (TO
INCLUDE OPERATION OF BARCO, ESSEX AND SIMILAR
TAMPERS); TRENCHER, SHAWNEE; TUGGER OPERATOR; WAGON
DRILLS; WATER PIPE LINER; WHEELBARROW (POWER
DRIVEN).(A-2 AREA: ADAMS,COLUMBIA,DOUGLAS (EAST OF
120TH MERIDIAN), FERRY, GRANT, OKANOGAN, PEND
OREILLE, AND STEVENS COUNTIES).....$ 40.46 16.90
LABORER: GROUP 4, AREA A-2 - AIR AND HYDRAULIC
TRACK DRILL; ASPHALT RAKER; BRUSH MACHINE (TO
INCLUDE HORIZONTAL CONSTRUCTION JOINT CLEANUP BRUSH
MACHINE, POWER PROPELLED); CAISSON WORKER, FREE
AIR; CHAIN SAW OPERATOR AND FALLER; CONCRETE STACK
(TO INCLUDE LABORERS WHEN LABORERS WORKING ON FREE
STANDING CONCRETE STACKS FOR SMOKE OR FUME CONTROL
ABOVE 40 FEET HIGH); GUNITE (TO INCLUDE OPERATION
OF MACHINE AND NOZZLE); HAZARDOUS WASTE WORKER,
LEVEL B (USES SAME RESPIRATOR PROTECTION AS LEVEL
A. A SUPPLIED AIR LINE IS PROVIDED IN CONJUNCTION
WITH A CHEMICAL ""SPLASH SUIT""); HIGH SCALER; LASER
BEAM OPERATOR (TO INLCUDE GRADE CHECKER AND
ELEVATION CONTROL); MINER, CLASS C (TO INCLUDE
MINER, NOZZLEMAN FOR CONCRETE, LASER BEAM OPERATOR

AND RIGGER ON TUNNELS); MONITOR OPERATOR (AIR TRACK
OR SIMILAR MOUNTING); MORTAR MIXER; NOZZLEMAN (TO
INCLUDE JET BLASTING NOZZLEMAN, OVER 1,200 LBS.,
JET BLAST MACHINE POWER PROPELLED, SANDBLAST
NOZZLE); PAVEMENT BREAKER (90 LBS. AND OVER);
PIPELAYER (TO INCLUDE WORKING TOPMAN, CAULKER,
COLLARMAN, JOINTER, MORTARMAN, RIGGER, JACKER,
SHORER, VALVE OR METER INSTALLER); PIPEWRAPPER;
PLASTERER TENDER; VIBRATORS (ALL). (A-2 AREA:
ADAMS,COLUMBIA,DOUGLAS (EAST OF 120TH MERIDIAN),
FERRY, GRANT, OKANOGAN, PEND OREILLE, AND STEVENS
COUNTIES).....$ 40.80 16.90
LABORER: GROUP 5, AREA A-2 - DRILLS WITH DUAL
MASTS: HAZARDOUS WASTE WORKER, LEVEL A (UTILIZES A
FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED
BREATHING APPARATUS OR A SUPPLIED AIR LINE); MINER
CLASS ""D"", TO INCLUDE RAISE AND SHAFT MINER, LASER
BEAM OPERATOR ON RAISES AND SHAFTS). (A-2 AREA:
ADAMS,COLUMBIA,DOUGLAS (EAST OF 120TH MERIDIAN),
FERRY, GRANT, OKANOGAN, PEND OREILLE, AND STEVENS
COUNTIES).....$ 41.14 16.90

LABO0238-006 06/01/2025

	Rates	Fringes
HOD CARRIER (COUNTIES EAST OF THE 120TH MERIDIAN: ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT, LINCOLN, OKANOGAN, PEND OREILLE, STEVENS, SPOKANE, WALLA WALLA, WHITMAN)	$ 38.05	16.75

LABO0242-003 06/01/2025

	Rates	Fringes
LABORER: ZONE 1: GROUP 1- LANDSCAPING AND PLANTING; WATCHMAN; WINDOW WASHER/CLEANER (DETAIL CLEAN-UP, SUCH AS BUT NOT LIMITED TO CLEANING FLOORS, CEILINGS, WALLS, WINDOWS, ETC., PRIOR TO FINAL ACCEPTANCE BY THE OWNER) (KING COUNTY) BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30. BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25	$ 36.07	15.79

LABORER: ZONE 1: GROUP 2A- BATCH WEIGHMAN; CRUSHER FEEDER; FENCE LABORER; FLAGMAN; PILOT CAR
(KING COUNTY)
BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30. BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.....$ 40.88 16.72

LABORER: ZONE 1: GROUP 3- GENERAL LABORER; AIR, GAS, OR ELECTRIC VIBRATING SCREED; ASBESTOS ABATEMENT LABORER; BALLAST REGULATOR MACHINE; BRUSH CUTTER; BRUSH HOG FEEDER; BURNER; CARPENTER TENDER; CEMENT FINISHER TENDER; CHANGE HOUSE OR DRY SHACK; CHIPPING GUN (UNDER 30 LBS.); CHOKER SETTER; CHUCK TENDER; CLEAN-UP LABORER; CONCRETE FORM STRIPPER; CURING LABORER; DEMOLITION (WRECKING AND MOVING INCLUDING CHARRED MATERIAL); DITCH DIGGER; DUMP PERSON; FINE GRADERS; FIREWATCH; FORM SETTER; GABIAN BASKET BUILDERS; GROUT MACHINE TENDER; GRINDERS; GUARDRAIL ERECTOR; HAZARDOUS WASTE WORKER (LEVEL C: USES A CHEMICAL ""SPLASH SUIT"" AND AIR PURIFYING RESPIRATOR); MAINTENANCE PERSON; MATERIAL YARD PERSON; POT TENDER; RIP RAP PERSON; RIGGERS; SCALE PERSON; SLOPER SPRAYER; SIGNAL PERSON; STOCK PILER; STAKE HOPPER; TOOLROOM MAN (AT JOB SITE); TOPPER-TAILER; TRACK LABORER; TRUCK SPOTTER; VINYL SEAMER
(KING COUNTY)
BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30 BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.....$ 50.38 16.96

LABORER: ZONE 1: GROUP 4- CEMENT DUMPER-PAVING; CHIPPING GUN (OVER 30 LBS.); CLARY POWER SPREADER; CONCRETE DUMPER/CHUTE OPERATOR; CONCRETE SAW OPERATOR; DRILL OPERATOR (HYDRAULIC, DIAMOND, AIARTRAC); FALLER AND BUCKER CHAIN SAW; GRADE CHECKER AND TRANSIT PERSON; GROUTMEN (PRESSURE) INCLUDING POST TENSION BEAMS; HAZARDOUS WASTE WORKER (LEVEL B: USES SAME RESPIRATOR PROTECTION AS LEVEL A. A SUPPLIED AIR LINE IS PROVIDED IN CONJUNCTION WITH A CHEMICAL ""SPLASH SUIT""); HIGH SCALER; JACKHAMMER; LASERBEAM OPERATOR; MANHOLE BUILDER-MUDMAN; NOZZLEMAN (CONCRETE PUMP, GREEN CUTTER WHEN USING COMBINATION OF HIGH PRESSURE AIR AND WATER ON CONCRETE AND ROCK, SANDBLAST, GUNITE, SHOTCRETE, WATER BLASTER, VACUUM BLASTER); PAVEMENT BREAKER; PIPE LAYER AND CAULKER; PIPE POT TENDER; PIPE RELINER (NOT INSERT TYPE); PIPE WRAPPER; POWER JACKS; RAILROAD SPIKE PULLER-POWER; RAKER-ASPHALT; RIVET BUSTER; RODDER; SLOPER (OVER 20 FT); SPREADER (CONCRETE); TAMPER AND SIMILAR ELECTRIC, AIR AND GLAS OPERATED TOOL; TIMBER PERSON-SEWER (LAGGER SHORER AND CRIBBER); TRACK LINER POWER; TUGGER OPERATOR; VIBRATOR; WELL POINT LABORER
(KING COUNTY)
BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30 BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.$ 51.52 16.99
LABORER: ZONE 1: GROUP 5- CAISSON WORKER; MORTARMAN AND HODCARRIER; POWDERMAN; RE-TIMBERMAN; HAZARDOUS WASTE WORKER (LEVEL A: UTILIZES A FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS OR A SUPPLIED AIR LINE).
(KING COUNTY)
BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30 BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN

25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.....$ 52.31 17.01

LABORER: ZONE 1: GROUP 6- MINER
(KING COUNTY)
BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30 BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.....$ 53.99 17.05

LABO0252-010 06/01/2025

	Rates	Fringes
LABORER: ZONE 1: GROUP 1 LANDSCAPING AND PLANTING; WATCHMAN; WINDOW WASHER/CLEANER (DETAIL CLEAN-UP, SUCH AS BUT NOT LIMITED TO CLEANING FLOORS, CEILINGS, WALLS, WINDOWS, ETC., PRIOR TO FINAL ACCEPTANCE BY THE OWNER) (CLALLAM, GRAYS HARBOR, JEFFERSON, KITSAP, LEWIS, MASON, PACIFIC (EXCLUDING SOUTHWEST), PIERCE, AND THURSTON COUNTIES) BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30 BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.....	$ 36.07	15.79
LABORER: ZONE 1: GROUP 2 BATCH WEIGHMAN; CRUSHER FEEDER; FENCE LABORER; FLAGMAN; PILOT CAR (CLALLAM, GRAYS HARBOR, JEFFERSON, KITSAP, LEWIS, MASON, PACIFIC (EXCLUDING SOUTHWEST), PIERCE, AND THURSTON COUNTIES) BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND		

BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30 BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.....$ 40.88 16.72
LABORER: ZONE 1: GROUP 3 GENERAL LABORER; AIR, GAS, OR ELECTRIC VIBRATING SCREED; ASBESTOS ABATEMENT LABORER; BALLAST REGULATOR MACHINE; BRUSH CUTTER; BRUSH HOG FEEDER; BURNER; CARPENTER TENDER; CEMENT FINISHER TENDER; CHANGE HOUSE OR DRY SHACK; CHIPPING GUN (UNDER 30 LBS.); CHOKER SETTER; CHUCK TENDER; CLEAN-UP LABORER; CONCRETE FORM STRIPPER; CURING LABORER; DEMOLITION (WRECKING AND MOVING INCLUDING CHARRED MATERIAL); DITCH DIGGER; DUMP PERSON; FINE GRADERS; FIREWATCH; FORM SETTER; GABIAN BASKET BUILDERS; GROUT MACHINE TENDER; GRINDERS; GUARDRAIL ERECTOR; HAZARDOUS WASTE WORKER (LEVEL C: USES A CHEMICAL ""SPLASH SUIT"" AND AIR PURIFYING RESPIRATOR); MAINTENANCE PERSON; MATERIAL YARD PERSON; POT TENDER; RIP RAP PERSON; RIGGERS; SCALE PERSON; SLOPER SPRAYER; SIGNAL PERSON; STOCK PILER; STAKE HOPPER; TOOLROOM MAN (AT JOB SITE); TOPPER-TAILER; TRACK LABORER; TRUCK SPOTTER; VINYL SEAMER
(CLALLAM, GRAYS HARBOR, JEFFERSON, KITSAP, LEWIS, MASON, PACIFIC (EXCLUDING SOUTHWEST), PIERCE, AND THURSTON COUNTIES)
BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30 BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.....$ 50.38 16.96
LABORER: ZONE 1: GROUP 4 CEMENT DUMPER-PAVING; CHIPPING GUN (OVER 30 LBS.); CLARY POWER SPREADER; CONCRETE DUMPER/CHUTE OPERATOR; CONCRETE SAW OPERATOR; DRILL OPERATOR (HYDRAULIC, DIAMOND, AIARTRAC); FALLER AND BUCKER CHAIN SAW; GROUTMEN (PRESSURE) INCLUDING POST TENSION BEAMS; HAZARDOUS WASTE WORKER (LEVEL B: USES SAME RESPIRATOR

PROTECTION AS LEVEL A. A SUPPLIED AIR LINE IS PROVIDED IN CONJUNCTION WITH A CHEMICAL ""SPLASH SUIT""); JACKHAMMER; LASERBEAM OPERATOR; MANHOLE BUILDER-MUDMAN; NOZZLEMAN (CONCRETE PUMP, GREEN CUTTER WHEN USING COMBINATION OF HIGH PRESSURE AIR AND WATER ON CONCRETE AND ROCK, SANDBLAST, GUNITE, SHOTCRETE, WATER BLASTER, VACUUM BLASTER); PAVEMENT BREAKER; PIPE LAYER AND CAULKER; PIPE POT TENDER; PIPE RELINER (NOT INSERT TYPE); PIPE WRAPPER; POWER JACKS; RAILROAD SPIKE PULLER-POWER; RAKER-ASPHALT; RIVET BUSTER; RODDER; SLOPER (OVER 20 FT); SPREADER (CONCRETE); TAMPER AND SIMILAR ELECTRIC, AIR AND GLAS OPERATED TOOL; TIMBER PERSON-SEWER (LAGGER SHORER AND CRIBBER); TRACK LINER POWER; TUGGER OPERATOR; VIBRATOR; WELL POINT LABORER
(CLALLAM, GRAYS HARBOR, JEFFERSON, KITSAP, LEWIS, MASON, PACIFIC (EXCLUDING SOUTHWEST), PIERCE, AND THURSTON COUNTIES)
BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30 BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.....$ 51.52 16.99
LABORER: ZONE 1: GROUP 5 CAISSON WORKER; MINER; MORTARMAN AND HODCARRIER; GRADE CHECKER AND TRANSIT PERSON; HIGH SCALER; POWDERMAN; RE-TIMBERMAN; HAZARDOUS WASTE WORKER (LEVEL A: UTILIZES A FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS OR A SUPPLIED AIR LINE).
(CLALLAM, GRAYS HARBOR, JEFFERSON, KITSAP, LEWIS, MASON, PACIFIC (EXCLUDING SOUTHWEST), PIERCE, AND THURSTON COUNTIES)
BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30 BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1

RATES): ZONE 2 - $2.25.....$ 52.31 17.01

LABO0292-008 06/01/2025

	Rates	Fringes
LABORER: ZONE 1: GROUP 1 LANDSCAPING AND PLANTING; WATCHMAN; WINDOW WASHER/CLEANER (DETAIL CLEAN-UP, SUCH AS BUT NOT LIMITED TO CLEANING FLOORS, CEILINGS, WALLS, WINDOWS, ETC., PRIOR TO FINAL ACCEPTANCE BY THE OWNER) (ISLAND, SAN JUAN, SKAGIT, SNOHOMISH, AND WHATCOM COUNTIES) BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30 BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.....	$ 36.07	15.79
LABORER: ZONE 1: GROUP 2 BATCH WEIGHMAN; CRUSHER FEEDER; FENCE LABORER; FLAGMAN; PILOT CAR (ISLAND, SAN JUAN, SKAGIT, SNOHOMISH, AND WHATCOM COUNTIES) BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30 BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.	$ 40.88	16.72
LABORER: ZONE 1: GROUP 3 GENERAL LABORER; AIR, GAS, OR ELECTRIC VIBRATING SCREED; ASBESTOS ABATEMENT LABORER; BALLAST REGULATOR MACHINE; BRUSH CUTTER; BRUSH HOG FEEDER; BURNER; CARPENTER TENDER; CEMENT FINISHER TENDER; CHANGE HOUSE OR DRY SHACK; CHIPPING GUN (UNDER 30 LBS.); CHOKER SETTER; CHUCK TENDER; CLEAN-UP LABORER; CONCRETE FORM STRIPPER; CURING LABORER; DEMOLITION (WRECKING AND MOVING INCLUDING CHARRED MATERIAL); DITCH DIGGER; DUMP PERSON; FINE GRADERS; FIREWATCH; FORM SETTER;		

GABIAN BASKET BUILDERS; GROUT MACHINE TENDER; GRINDERS; GUARDRAIL ERECTOR; HAZARDOUS WASTE WORKER (LEVEL C: USES A CHEMICAL ""SPLASH SUIT"" AND AIR PURIFYING RESPIRATOR); MAINTENANCE PERSON; MATERIAL YARD PERSON; POT TENDER; RIP RAP PERSON; RIGGERS; SCALE PERSON; SLOPER SPRAYER; SIGNAL PERSON; STOCK PILER; STAKE HOPPER; TOOLROOM MAN (AT JOB SITE); TOPPER-TAILER; TRACK LABORER; TRUCK SPOTTER; VINYL SEAMER

(ISLAND, SAN JUAN, SKAGIT, SNOHOMISH, AND WHATCOM COUNTIES)

BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30 BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.....$ 50.38 16.96

LABORER: ZONE 1: GROUP 4 CEMENT DUMPER-PAVING; CHIPPING GUN (OVER 30 LBS.); CLARY POWER SPREADER; CONCRETE DUMPER/CHUTE OPERATOR; CONCRETE SAW OPERATOR; DRILL OPERATOR (HYDRAULIC, DIAMOND, AIARTRAC); FALLER AND BUCKER CHAIN SAW; GRADE CHECKER AND TRANSIT PERSON; GROUTMEN (PRESSURE) INCLUDING POST TENSION BEAMS; HAZARDOUS WASTE WORKER (LEVEL B: USES SAME RESPIRATOR PROTECTION AS LEVEL A. A SUPPLIED AIR LINE IS PROVIDED IN CONJUNCTION WITH A CHEMICAL ""SPLASH SUIT""); HIGH SCALER; JACKHAMMER; LASERBEAM OPERATOR; MANHOLE BUILDER-MUDMAN; NOZZLEMAN (CONCRETE PUMP, GREEN CUTTER WHEN USING COMBINATION OF HIGH PRESSURE AIR AND WATER ON CONCRETE AND ROCK, SANDBLAST, GUNITE, SHOTCRETE, WATER BLASTER, VACUUM BLASTER); PAVEMENT BREAKER; PIPE LAYER AND CAULKER; PIPE POT TENDER; PIPE RELINER (NOT INSERT TYPE); PIPE WRAPPER; POWER JACKS; RAILROAD SPIKE PULLER-POWER; RAKER-ASPHALT; RIVET BUSTER; RODDER; SLOPER (OVER 20 FT); SPREADER (CONCRETE); TAMPER AND SIMILAR ELECTRIC, AIR AND GLAS OPERATED TOOL; TIMBER PERSON-SEWER (LAGGER SHORER AND CRIBBER); TRACK LINER POWER; TUGGER OPERATOR; VIBRATOR; WELL POINT LABORER

(ISLAND, SAN JUAN, SKAGIT, SNOHOMISH, AND WHATCOM COUNTIES)

BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE

CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30 BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.$ 51.52 16.99

LABORER: ZONE 1: GROUP 5 CAISSON WORKER; MINER; MORTARMAN AND HODCARRIER; POWDERMAN; RE-TIMBERMAN; HAZARDOUS WASTE WORKER (LEVEL A: UTILIZES A FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS OR A SUPPLIED AIR LINE).

(ISLAND, SAN JUAN, SKAGIT, SNOHOMISH, AND WHATCOM COUNTIES)

BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30 BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.....$ 52.31 17.01

LABO0335-022 06/01/2025

	Rates	Fringes
LABORER: GROUP 1 LANDSCAPING, AND/OR PLANTING LABORERS (CLARK, COWLITZ, KLICKITAT, PACIFIC (SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN), SKAMANIA AND WAHKIAKUM COUNTIES).....	$ 32.67	15.60
LABORER: GROUP 2 FENCE BUILDERS AND TRAFFIC FLAGGERS (CLARK, COWLITZ, KLICKITAT, PACIFIC (SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN), SKAMANIA AND WAHKIAKUM COUNTIES).....	$ 40.56	15.60

LABORER: GROUP 3 ASPHALT PLANT LABORERS; ASPHALT SPREADERS; BATCH WEIGHMAN; BROOMERS; BRUSH BURNERS AND CUTTERS; CAR AND TRUCK LOADERS; CARPENTER TENDER; CHANGE-HOUSE MAN OR DRY SHACK MAN; CHOKER SETTER; CLEAN-UP LABORERS; CURING, CONCRETE; DEMOLITION, WRECKING AND MOVING LABORERS; DUMPERS, ROAD OILING CREW; DUMPMEN (FOR GRADING CREW);

ELEVATOR FEEDERS; MEDIAN RAIL REFERENCE POST, GUIDE POST, RIGHT OF WAY MARKER; FINE GRADERS; FIRE WATCH; FORM STRIPPERS (NOT SWINGING STAGES); GENERAL LABORERS; HAZARDOUS WASTE WORKER; HOD CARRIER; LEVERMAN OR AGGREGATE SPREADER (FLAHERTY AND SIMILAR TYPES); LOADING SPOTTERS; MATERIAL YARD MAN (INCLUDING ELECTRICAL); PITTSBURGH CHIPPER OPERATOR OR SIMILAR TYPES; RAILROAD TRACK LABORERS; RIBBON SETTERS (INCLUDING STEEL FORMS); RIP RAP MAN (HAND PLACED); ROAD PUMP TENDER; SEWER LABOR; SIGNALMAN; SKIPMAN; SLOPERS; SPRAYMEN; STAKE CHASER; STOCKPILER; TIE BACK SHORING; TIMBER FALLER AND BUCKER (HAND LABOR); TOOLROOM MAN (AT JOB SITE); TUNNEL BULLGANG (ABOVE GROUND); WEIGHT-MAN-CRUSHER (AGGREGATE WHEN USED)

(CLARK, COWLITZ, KLICKITAT, PACIFIC (SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN), SKAMANIA AND WAHKIAKUM COUNTIES)....$ 44.06 15.60

LABORER: GROUP 4 APPLICATOR (INCLUDING POT POWER TENDER FOR SAME), APPLYING PROTECTIVE MATERIAL BY HAND OR NOZZLE ON UTILITY LINES OR STORAGE TANKS ON PROJECT; BRUSH CUTTERS (POWER SAW); BURNERS; CHOKER SPLICER; CLARY POWER SPREADER AND SIMILAR TYPES; CLEAN- UP NOZZLEMAN-GREEN CUTTER (CONCRETE, ROCK, ETC.); CONCRETE POWER BUGGYMAN; CONCRETE LABORER; CRUSHER FEEDER; DEMOLITION AND WRECKING CHARRED MATERIALS; GUNITE NOZZLEMAN TENDER; GUNITE OR SAND BLASTING POT TENDER; HANDLERS OR MIXERS OF ALL MATERIALS OF AN IRRITATING NATURE (INCLUDING CEMENT AND LIME); TOOL OPERATORS (INCLUDES BUT NOT LIMITED TO: DRY PACK MACHINE; JACKHAMMER; CHIPPING GUNS; PAVING BREAKERS); PIPE DOPING AND WRAPPING; POST HOLE DIGGER, AIR, GAS OR ELECTRIC; VIBRATING SCREED; TAMPERS; SAND BLASTING (WET); STAKE-SETTER; TUNNEL-MUCKERS, BRAKEMEN, CONCRETE CREW, BULLGANG (UNDERGROUND)

(CLARK, COWLITZ, KLICKITAT, PACIFIC (SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN), SKAMANIA AND WAHKIAKUM COUNTIES)....$ 44.90 15.60

LABORER: GROUP 5 ASBESTOS REMOVAL; BIT GRINDER; DRILL DOCTOR; DRILL OPERATORS, AIR TRACKS, CAT DRILLS, WAGON DRILLS, RUBBER-MOUNTED DRILLS, AND OTHER SIMILAR TYPES INCLUDING AT CRUSHER PLANTS; GUNITE NOZZLEMAN; HIGH SCALERS, STRIPPERS AND DRILLERS (COVERS WORK IN SWINGING STAGES, CHAIRS OR BELTS, UNDER EXTREME CONDITIONS UNUSUAL TO NORMAL DRILLING, BLASTING, BARRING-DOWN, OR SLOPING AND STRIPPING); MANHOLE BUILDER; POWDERMEN; CONCRETE SAW OPERATOR; PWDERMEN; POWER SAW OPERATORS (BUCKING AND FALLING); PUMPCRETE NOZZLEMEN; SAND BLASTING (DRY); SEWER TIMBERMAN; TRACK LINERS, ANCHOR MACHINES, BALLAST REGULATORS, MULTIPLE TAMPERS, POWER JACKS, TUGGER OPERATOR; TUNNEL-CHUCK TENDERS, NIPPERS AND TIMBERMEN; VIBRATOR; WATER

BLASTER
(CLARK, COWLITZ, KLICKITAT, PACIFIC (SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN), SKAMANIA AND WAHKIAKUM COUNTIES).....$ 45.54 15.60
LABORER: GROUP 6 ASPHALT RAKER; CONCRETE SAW OPERATOR (WALLS); CONCRETE NOZZELMAN; GRADE CHECKER; PIPELAYER; LASER BEAM (PIPELAYING)-APPLICABLE WHEN EMPLOYEE ASSIGNED TO MOVE, SET UP, ALIGN; LASER BEAM; TUNNEL MINERS; MOTORMAN-DINKY LOCOMOTIVE-TUNNEL; POWDERMAN-TUNNEL; SHIELD OPERATOR-TUNNEL
(CLARK, COWLITZ, KLICKITAT, PACIFIC (SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN), SKAMANIA AND WAHKIAKUM COUNTIES).....$ 46.08 15.60

LABO0348-003 06/01/2025

	Rates	Fringes
LABORER: ZONE 1: GROUP 1 LANDSCAPING AND PLANTING; WATCHMAN; WINDOW WASHER/CLEANER (DETAIL CLEAN-UP, SUCH AS BUT NOT LIMITED TO CLEANING FLOORS, CEILINGS, WALLS, WINDOWS, ETC., PRIOR TO FINAL ACCEPTANCE BY THE OWNER) (CHELAN, DOUGLAS (W OF 12TH MERIDIAN), KITTITAS, AND YAKIMA COUNTIES) BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30. BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.....	$ 31.19	16.48
LABORER: ZONE 1: GROUP 2 BATCH WEIGHMAN; CRUSHER FEEDER; FENCE LABORER; FLAGMAN; PILOT CAR (CHELAN, DOUGLAS (W OF 12TH MERIDIAN), KITTITAS, AND YAKIMA COUNTIES) BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE		

CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30. BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.$ 35.34 16.59
LABORER: ZONE 1: GROUP 3 GENERAL LABORER; AIR, GAS, OR ELECTRIC VIBRATING SCREED; ASBESTOS ABATEMENT LABORER; BALLAST REGULATOR MACHINE; BRUSH CUTTER; BRUSH HOG FEEDER; BURNER; CARPENTER TENDER; CEMENT FINISHER TENDER; CHANGE HOUSE OR DRY SHACK; CHIPPING GUN (UNDER 30 LBS.); CHOKER SETTER; CHUCK TENDER; CLEAN-UP LABORER; CONCRETE FORM STRIPPER; CURING LABORER; DEMOLITION (WRECKING AND MOVING INCLUDING CHARRED MATERIAL); DITCH DIGGER; DUMP PERSON; FINE GRADERS; FIREWATCH; FORM SETTER; GABIAN BASKET BUILDERS; GROUT MACHINE TENDER; GRINDERS; GUARDRAIL ERECTOR; HAZARDOUS WASTE WORKER (LEVEL C: USES A CHEMICAL ""SPLASH SUIT"" AND AIR PURIFYING RESPIRATOR); MAINTENANCE PERSON; MATERIAL YARD PERSON; POT TENDER; RIP RAP PERSON; RIGGERS; SCALE PERSON; SLOPER SPRAYER; SIGNAL PERSON; STOCK PILER; STAKE HOPPER; TOOLROOM MAN (AT JOB SITE); TOPPER-TAILER; TRACK LABORER; TRUCK SPOTTER; VINYL SEAMER
(CHELAN, DOUGLAS (W OF 12TH MERIDIAN), KITTITAS, AND YAKIMA COUNTIES)
BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30. BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.....$ 38.40 16.66
LABORER: ZONE 1: GROUP 4 CEMENT DUMPER-PAVING; CHIPPING GUN (OVER 30 LBS.); CLARY POWER SPREADER; CONCRETE DUMPER/CHUTE OPERATOR; CONCRETE SAW OPERATOR; DRILL OPERATOR (HYDRAULIC, DIAMOND, AIARTRAC); FALLER AND BUCKER CHAIN SAW; GRADE CHECKER AND TRANSIT PERSON; GROUTMEN (PRESSURE) INCLUDING POST TENSION BEAMS; HAZARDOUS WASTE WORKER (LEVEL B: USES SAME RESPIRATOR PROTECTION AS LEVEL A. A SUPPLIED AIR LINE IS PROVIDED IN CONJUNCTION WITH A CHEMICAL ""SPLASH SUIT""); HIGH SCALER; JACKHAMMER; LASERBEAM OPERATOR; MANHOLE BUILDER-MUDMAN; NOZZLEMAN (CONCRETE PUMP, GREEN

CUTTER WHEN USING COMBINATION OF HIGH PRESSURE AIR AND WATER ON CONCRETE AND ROCK, SANDBLAST, GUNITE, SHOTCRETE, WATER BLASTER, VACUUM BLASTER); PAVEMENT BREAKER; PIPE LAYER AND CAULKER; PIPE POT TENDER; PIPE RELINER (NOT INSERT TYPE); PIPE WRAPPER; POWER JACKS; RAILROAD SPIKE PULLER-POWER; RAKER-ASPHALT; RIVET BUSTER; RODDER; SLOPER (OVER 20 FT); SPREADER (CONCRETE); TAMPER AND SIMILAR ELECTRIC, AIR AND GLAS OPERATED TOOL; TIMBER PERSON-SEWER (LAGGER SHORER AND CRIBBER); TRACK LINER POWER; TUGGER OPERATOR; VIBRATOR; WELL POINT LABORER
(CHELAN, DOUGLAS (W OF 12TH MERIDIAN), KITTITAS, AND YAKIMA COUNTIES)
BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30. BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.....$ 39.26 16.68

LABORER: ZONE 1: GROUP 5 CAISSON WORKER; MINER; MORTARMAN AND HODCARRIER; POWDERMAN; RE-TIMBERMAN; HAZARDOUS WASTE WORKER (LEVEL A: UTILIZES A FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS OR A SUPPLIED AIR LINE).
(CHELAN, DOUGLAS (W OF 12TH MERIDIAN), KITTITAS, AND YAKIMA COUNTIES)
BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT, SEATTLE, KENT, TACOMA, OLYMPIA, CENTRALIA, ABERDEEN, SHELTON, PT. TOWNSEND, PT. ANGELES, AND BREMERTON ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 BUT LESS THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE 3 - MORE THAN 45 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $1.00 ZONE 3 - $1.30. BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE, AND YAKIMA ZONE 1 - PROJECTS WITHIN 25 RADIUS MILES OF THE RESPECTIVE CITY HALL ZONE 2 - MORE THAN 25 RADIUS MILES FROM THE RESPECTIVE CITY HALL ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES): ZONE 2 - $2.25.....$ 39.89 16.70

PAIN0005-002 07/01/2025

	Rates	Fringes
PAINTERS: STRIPERS (STATEWIDE EXCEPT CLARK, COWLITZ, KLICKITAT, PACIFIC, SKAMANIA, AND WAHKIAKUM COUNTIES)	$ 41.80	20.85

PAIN0010-012 07/01/2025

	Rates	Fringes
PAINTER: BRUSH, ROLLER, SPRAY & SANDBLASTING (CLARK, COWLITZ, KLICKITAT, PACIFIC, SKAMANIA, AND WAHKIAKUM COUNTIES)	$ 39.94	16.68

PAIN0010-013 07/01/2025

	Rates	Fringes
PAINTERS: HIGHWAY & PARKING LOT STRIPER (CLARK, COWLITZ, KLICKITAT, PACIFIC, SKAMANIA AND WAHKIAKUM COUNTIES)	$ 41.19	17.09

PAIN0300-007 07/01/2025

	Rates	Fringes
PAINTER (CLALLAM, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS, MASON, PIERCE, SAN JUAN, SKAGIT, SNOHOMISH, THURSTON, AND WHATCOM COUNTIES)	$ 41.24	14.70

PAIN0427-005 07/01/2025

	Rates	Fringes
PAINTER (APPLICATION OF COLD TAR PRODUCTS, EPOXIES, POLYURETHANES, ACIDS, RADIATION RESISTANT MATERIAL, WATER, SANDBLASTING, OVER 30'/SWING STAGE WORK, BRUSH, ROLLER, STRIPING, STEAM-CLEANING, AND SPRAY). (ADAMS, ASOTIN; BENTON AND FRANKLIN (EXCEPT HANFORD SITE); CHELAN, COLUMBIA, DOUGLAS, FERRY, GARFIELD, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN, AND YAKIMA COUNTIES)	$ 36.26	17.01

PLAS0072-004 06/01/2025

	Rates	Fringes
CEMENT MASON/CONCRETE FINISHER (ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN, AND YAKIMA COUNTIES) ZONE DIFFERENTIAL (ADD TO ZONE 1 RATE): ZONE 1- BASE RATE. ZONE 2 - $3.00 BASE POINTS: SPOKANE, PASCO, LEWISTON; WENATCHEE ZONE 1: 0 - 45 RADIUS MILES FROM THE MAIN POST OFFICE ZONE 2: OVER 45 RADIUS MILES FROM THE MAIN POST OFFICE	$ 40.89	18.64

PLAS0528-001 06/01/2024

	Rates	Fringes
CEMENT MASON: CEMENT MASON (CLALUM, COWLITZ, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC, PIERCE, SAN JUAN, SKAGIT, SNOHOMISH, THURSTON, WAHKIAKUM, AND WHATCOM COUNTIES)	$ 54.16	21.27
CEMENT MASON:COMPOSITION, TROWEL MACHINE, GRINDER, POWER TOOLS, GUNNITE NOZZLE (CLALUM, COWLITZ, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC, PIERCE, SAN JUAN, SKAGIT, SNOHOMISH, THURSTON, WAHKIAKUM, AND WHATCOM COUNTIES)	$ 54.66	21.27
CEMENT MASON: TROWELING MACHINE OPERATOR ON COMPOSITION (CLALUM, COWLITZ, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC, PIERCE, SAN JUAN, SKAGIT, SNOHOMISH, THURSTON, WAHKIAKUM, AND WHATCOM COUNTIES)	$ 54.66	21.27

PLAS0555-002 06/01/2025

	Rates	Fringes
CEMENT MASON: CEMENT MASONS (CLARK, KLICKITAT AND SKAMANIA COUNTIES) ZONE DIFFERENTIAL- ZONE 1: BASE RATE. ZONE 2 - $0.65 ZONE 3 - 1.15 ZONE 4 - 1.70 ZONE 5 - 3.00 BASE POINTS: BEND, CORVALLIS, EUGENE, MEDFORD, PORTLAND, SALEM, THE DALLES, VANCOUVER ZONE 1: PROJECTS WITHIN 30 MILES OF THE RESPECTIVE CITY HALL ZONE 2: MORE THAN 30 MILES BUT LESS THAN 40 MILES FROM THE RESPECTIVE CITY HALL. ZONE 3: MORE THAN 40 MILES BUT LESS THAN 50 MILES FROM THE RESPECTIVE CITY HALL. ZONE 4: MORE THAN 50 MILES BUT LESS THAN 80 MILES FROM THE RESPECTIVE CITY HALL. ZONE 5: MORE THAN 80 MILES FROM THE RESPECTIVE CITY HALL	$ 46.13	20.31
CEMENT MASON: CEMENT MASONS DOING BOTH COMPOSITION/POWER MACHINERY AND SUSPENDED/HANGING SCAFFOLD (CLARK, KLICKITAT AND SKAMANIA COUNTIES) ZONE DIFFERENTIAL- ZONE 1: BASE RATE. ZONE 2 - $0.65 ZONE 3 - 1.15 ZONE 4 - 1.70 ZONE 5 - 3.00 BASE POINTS: BEND, CORVALLIS, EUGENE, MEDFORD, PORTLAND, SALEM, THE DALLES, VANCOUVER ZONE 1: PROJECTS WITHIN 30 MILES OF THE RESPECTIVE CITY HALL ZONE 2: MORE THAN 30 MILES BUT LESS THAN 40 MILES FROM THE RESPECTIVE CITY HALL. ZONE 3: MORE THAN 40 MILES BUT LESS THAN 50 MILES FROM THE RESPECTIVE CITY HALL. ZONE 4: MORE THAN 50 MILES BUT LESS THAN 80 MILES FROM THE RESPECTIVE CITY HALL. ZONE 5: MORE THAN 80 MILES FROM THE RESPECTIVE CITY HALL	$ 48.05	20.31
CEMENT MASON: CEMENT MASONS ON SUSPENDED, SWINGING AND/OR HANGING SCAFFOLD (CLARK, KLICKITAT AND SKAMANIA COUNTIES) ZONE DIFFERENTIAL- ZONE 1: BASE RATE. ZONE 2 - $0.65 ZONE 3 - 1.15 ZONE 4 - 1.70 ZONE 5 - 3.00 BASE POINTS: BEND, CORVALLIS, EUGENE, MEDFORD, PORTLAND, SALEM, THE		

DALLES, VANCOUVER ZONE 1: PROJECTS WITHIN 30 MILES OF THE RESPECTIVE CITY HALL ZONE 2: MORE THAN 30 MILES BUT LESS THAN 40 MILES FROM THE RESPECTIVE CITY HALL. ZONE 3: MORE THAN 40 MILES BUT LESS THAN 50 MILES FROM THE RESPECTIVE CITY HALL. ZONE 4: MORE THAN 50 MILES BUT LESS THAN 80 MILES FROM THE RESPECTIVE CITY HALL. ZONE 5: MORE THAN 80 MILES FROM THE RESPECTIVE CITY HALL....$ 47.09 20.31

CEMENT MASON: COMPOSITION WORKERS AND POWER MACHINERY OPERATORS (CLARK, KLICKITAT AND SKAMANIA COUNTIES) ZONE DIFFERENTIAL- ZONE 1: BASE RATE. ZONE 2 - $0.65 ZONE 3 - 1.15 ZONE 4 - 1.70 ZONE 5 - 3.00 BASE POINTS: BEND, CORVALLIS, EUGENE, MEDFORD, PORTLAND, SALEM, THE DALLES, VANCOUVER ZONE 1: PROJECTS WITHIN 30 MILES OF THE RESPECTIVE CITY HALL ZONE 2: MORE THAN 30 MILES BUT LESS THAN 40 MILES FROM THE RESPECTIVE CITY HALL. ZONE 3: MORE THAN 40 MILES BUT LESS THAN 50 MILES FROM THE RESPECTIVE CITY HALL. ZONE 4: MORE THAN 50 MILES BUT LESS THAN 80 MILES FROM THE RESPECTIVE CITY HALL. ZONE 5: MORE THAN 80 MILES FROM THE RESPECTIVE CITY HALL.....$ 47.09 20.31

TEAM0037-002 06/01/2024

	Rates	Fringes

TRUCK DRIVER: GROUP 1- A FRAME OR HYDRA LIFRT TRUCK W/LOAD BEARING SURFACE; ARTICULATED DUMP TRUCK; BATTERY REBUILDERS; BUS OR MANHAUL DRIVER; CONCRETE BUGGIES (POWER OPERATED); CONCRETE PUMP TRUCK; DUMP TRUCKS, SIDE, END AND BOTTOM DUMPS, INCLUDING SEMI TRUCKS AND TRAINS OR COMBINATIONS THERE OF: UP TO AND INCLUDING 10 CU. YDS.; LIFT JITNEYS, FORK LIFTS (ALL SIZES IN LOADING, UNLOADING AND TRANSPORTING MATERIAL ON JOB SITE); LOADER AND/OR LEVERMAN ON CONCRETE DRY BATCH PLANT (MANUALLY OPERATED); PILOT CAR; PICKUP TRUCK; SOLO FLAT BED AND MISC. BODY TRUCKS, 0-10 TONS; TRUCK TENDER; TRUCK MECHANIC TENDER; WATER WAGONS (RATED CAPACITY) UP TO 3,000 GALLONS; TRANSIT MIX AND WET OR DRY MIX - 5 CU. YDS. AND UNDER; LUBRICATION MAN, FUEL TRUCK DRIVER, TIREMAN, WASH RACK, STEAM CLEANER OR COMBINATIONS; TEAM DRIVER; SLURRY TRUCK DRIVER OR LEVERMAN; TIREMAN

(CLARK, COWLITZ, KLICKITAT, PACIFIC (SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN), SKAMANIA, AND WAHKIAKUM COUNTIES)

ZONE DIFFERENTIAL- ZONE 1: BASE RATE. ZONE 2 - $0.65 ZONE 3 - $1.15 ZONE 4 - $1.70 ZONE 5 - $2.75. BASE POINTS: ASTORIA, THE DALLES, LONGVIEW AND VANCOUVER. ZONE 1: PROJECTS WITHIN 30 MILES OF THE RESPECTIVE CITY HALL. ZONE 2: MORE THAN 30 MILES BUT LESS THAN 40 MILES FROM THE RESPECTIVE

CITY HALL. ZONE 3: MORE THAN 40 MILES BUT LESS THAN 50 MILES FROM THE RESPECTIVE CITY HALL. ZONE 4: MORE THAN 50 MILES BUT LESS THAN 80 MILES FROM THE RESPECTIVE CITY HALL. ZONE 5: MORE THAN 80 MILES FROM THE RESPECTIVE CITY HALL.....$ 33.09 17.63

TRUCK DRIVER: GROUP 2- BOOM TRUCK/HYDRA-LIFT OR RETRACTING CRANE; CHALLENGER; DUMPSTERS OR SIMILAR EQUIPMENT ALL SIZES; DUMP TRUCKS/ARTICULATED DUMPS 6 CU TO 10 CU.; FLAHERTY SPREADER DRIVER OR LEVERMAN; LOWBED EQUIPMENT, FLAT BED SEMI-TRAILER OR DOUBLES TRANSPORTING EQUIPMENT OR WET OR DRY MATERIALS; LUMBER CARRIER, DRIVER-STRADDLE CARRIER (USED IN LOADING, UNLOADING AND TRANSPORTING OF MATERIALS ON JOB SITE); OIL DISTRIBUTOR DRIVER OR LEVERMAN; TRANSIT MIX AND WET OR DRY MIX TRCUKS: OVER 5 CU. YDS. AND INCLUDING 7 CU. YDS.; VACUUM TRUCKS; WATER TRUCK/WAGONS (RATED CAPACITY) OVER 3,000 TO 5,000 GALLONS

(CLARK, COWLITZ, KLICKITAT, PACIFIC (SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN), SKAMANIA, AND WAHKIAKUM COUNTIES)

ZONE DIFFERENTIAL- ZONE 1: BASE RATE. ZONE 2 - $0.65 ZONE 3 - $1.15 ZONE 4 - $1.70 ZONE 5 - $2.75. BASE POINTS: ASTORIA, THE DALLES, LONGVIEW AND VANCOUVER. ZONE 1: PROJECTS WITHIN 30 MILES OF THE RESPECTIVE CITY HALL. ZONE 2: MORE THAN 30 MILES BUT LESS THAN 40 MILES FROM THE RESPECTIVE CITY HALL. ZONE 3: MORE THAN 40 MILES BUT LESS THAN 50 MILES FROM THE RESPECTIVE CITY HALL. ZONE 4: MORE THAN 50 MILES BUT LESS THAN 80 MILES FROM THE RESPECTIVE CITY HALL. ZONE 5: MORE THAN 80 MILES FROM THE RESPECTIVE CITY HALL....$ 33.24 17.63

TRUCK DRIVER: GROUP 3- AMMONIA NITRATE DISTRIBUTOR DRIVER; DUMP TRUCKS, SIDE, END AND BOTTOM DUMPS, INCLUDING SEMI TRUCKS AND TRAINS OR COMBINATIONS THEREOF: OVER 10 CU. YDS. AND INCLUDING 30 CU. YDS. INCLUDES ARTICULATED DUMP TRUCKS; SELF-PROPELLED STREET SWEEPER; TRANSIT MIX AND WET OR DRY MIX TRUCK: OVER 7 CU YDS. AND INCLUDING 11 CU YDS.; TRUCK MECHANIC-WELDER-BODY REPAIRMAN; UTILITY AND CLEAN-UP TRUCK; WATER WAGONS (RATED CAPACITY) OVER 5,000 TO 10,000 GALLONS

(CLARK, COWLITZ, KLICKITAT, PACIFIC (SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN), SKAMANIA, AND WAHKIAKUM COUNTIES)

ZONE DIFFERENTIAL- ZONE 1: BASE RATE. ZONE 2 - $0.65 ZONE 3 - $1.15 ZONE 4 - $1.70 ZONE 5 - $2.75. BASE POINTS: ASTORIA, THE DALLES, LONGVIEW AND VANCOUVER. ZONE 1: PROJECTS WITHIN 30 MILES OF THE RESPECTIVE CITY HALL. ZONE 2: MORE THAN 30 MILES BUT LESS THAN 40 MILES FROM THE RESPECTIVE CITY HALL. ZONE 3: MORE THAN 40 MILES BUT LESS

THAN 50 MILES FROM THE RESPECTIVE CITY HALL. ZONE 4: MORE THAN 50 MILES BUT LESS THAN 80 MILES FROM THE RESPECTIVE CITY HALL. ZONE 5: MORE THAN 80 MILES FROM THE RESPECTIVE CITY HALL.....$ 33.40 17.63

TRUCK DRIVER: GROUP 4- ASPHALT BURNER; DUMP TRUCKS, SIDE, END AND BOTTOM CUMPS, INCLUDING SEMI-TRUCKS AND TRAINS OR COMBINATIONS THEREOF: OVER 30 CU. YDS. AND INCLUDING 50 CU. YDS. INCLUDES ARTICULATED DUMP TRUCKS; FIRE GUARD; TRANSIT MIX AND WET OR DRY MIX TRUCKS, OVER 11 CU. YDS. AND INCLUDING 15 CU. YDS.; WATER WAGON (RATED CAPACITY) OVER 10,000 GALLONS TO 15,000 GALLONS

(CLARK, COWLITZ, KLICKITAT, PACIFIC (SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN), SKAMANIA, AND WAHKIAKUM COUNTIES)

ZONE DIFFERENTIAL- ZONE 1: BASE RATE. ZONE 2 - $0.65 ZONE 3 - $1.15 ZONE 4 - $1.70 ZONE 5 - $2.75. BASE POINTS: ASTORIA, THE DALLES, LONGVIEW AND VANCOUVER. ZONE 1: PROJECTS WITHIN 30 MILES OF THE RESPECTIVE CITY HALL. ZONE 2: MORE THAN 30 MILES BUT LESS THAN 40 MILES FROM THE RESPECTIVE CITY HALL. ZONE 3: MORE THAN 40 MILES BUT LESS THAN 50 MILES FROM THE RESPECTIVE CITY HALL. ZONE 4: MORE THAN 50 MILES BUT LESS THAN 80 MILES FROM THE RESPECTIVE CITY HALL. ZONE 5: MORE THAN 80 MILES FROM THE RESPECTIVE CITY HALL.....$ 33.72 17.63

TRUCK DRIVER: GROUP 5- COMPOSITE CREWMAN; DUMP TRUCKS, SIDE, END AND BOTTOM DUMPS, INCLUDING SEMI TRUCKS AND TRAINS OR COMBINATIONS THEREOF: OVER 50 CU. YDS. AND INCLUDING 60 CU. YDS. INCLUDES ARTICULATED DUMP TRUCKS

(CLARK, COWLITZ, KLICKITAT, PACIFIC (SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN), SKAMANIA, AND WAHKIAKUM COUNTIES)

ZONE DIFFERENTIAL- ZONE 1: BASE RATE. ZONE 2 - $0.65 ZONE 3 - $1.15 ZONE 4 - $1.70 ZONE 5 - $2.75. BASE POINTS: ASTORIA, THE DALLES, LONGVIEW AND VANCOUVER. ZONE 1: PROJECTS WITHIN 30 MILES OF THE RESPECTIVE CITY HALL. ZONE 2: MORE THAN 30 MILES BUT LESS THAN 40 MILES FROM THE RESPECTIVE CITY HALL. ZONE 3: MORE THAN 40 MILES BUT LESS THAN 50 MILES FROM THE RESPECTIVE CITY HALL. ZONE 4: MORE THAN 50 MILES BUT LESS THAN 80 MILES FROM THE RESPECTIVE CITY HALL. ZONE 5: MORE THAN 80 MILES FROM THE RESPECTIVE CITY HALL.....$ 33.97 17.63

TRUCK DRIVER:GROUP 6- BULK CEMENT SPREADER W/O AUGER; DRY PRE-BATCH CONCRETE MIX TRUCKS; DUMP TRUCKS, SIDE, END AND BOTTOM DUMPS, INCLUDING SEMI TRUCKS AND TRAINS OF COMBINATIONS THEREOF: OVER 60 CU. YDS. AND INCLUDING 80 CU. YDS., AND INCLUDES

ARTICULATED DUMP TRUCKS; SKID TRUCK
(CLARK,
COWLITZ, KLICKITAT, PACIFIC (SOUTH OF A STRAIGHT
LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF
WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN),
SKAMANIA, AND WAHKIAKUM COUNTIES)
ZONE DIFFERENTIAL- ZONE 1: BASE RATE. ZONE 2 -
$0.65 ZONE 3 - $1.15 ZONE 4 - $1.70 ZONE 5 -
$2.75. BASE POINTS: ASTORIA, THE DALLES, LONGVIEW
AND VANCOUVER. ZONE 1: PROJECTS WITHIN 30 MILES
OF THE RESPECTIVE CITY HALL. ZONE 2: MORE THAN
30 MILES BUT LESS THAN 40 MILES FROM THE RESPECTIVE
CITY HALL. ZONE 3: MORE THAN 40 MILES BUT LESS
THAN 50 MILES FROM THE RESPECTIVE CITY HALL. ZONE
4: MORE THAN 50 MILES BUT LESS THAN 80 MILES FROM
THE RESPECTIVE CITY HALL. ZONE 5: MORE THAN 80
MILES FROM THE RESPECTIVE CITY HALL.....$ 34.18 17.63
TRUCK DRIVER: GROUP 7- DUMP TRUCKS, SIDE, END AND
BOTTOM DUMPS, INCLUDING SEMI TRUCKS AND TRAINS OR
COMBINATIONS THEREOF: OVER 80 CU. YDS. AND
INCLUDING 100 CU. YDS., INCLUDES ARTICULATED DUMP
TRUCKS; INDUSTRIAL LIFT TRUCK (MECHANICAL TAILGATE)
(CLARK, COWLITZ, KLICKITAT, PACIFIC (SOUTH
OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH
BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE
PACIFIC OCEAN), SKAMANIA, AND WAHKIAKUM COUNTIES)
ZONE DIFFERENTIAL- ZONE 1: BASE
RATE. ZONE 2 - $0.65 ZONE 3 - $1.15 ZONE 4 -
$1.70 ZONE 5 - $2.75. BASE POINTS: ASTORIA, THE
DALLES, LONGVIEW AND VANCOUVER. ZONE 1:
PROJECTS WITHIN 30 MILES OF THE RESPECTIVE CITY
HALL. ZONE 2: MORE THAN 30 MILES BUT LESS THAN
40 MILES FROM THE RESPECTIVE CITY HALL. ZONE 3:
MORE THAN 40 MILES BUT LESS THAN 50 MILES FROM THE
RESPECTIVE CITY HALL. ZONE 4: MORE THAN 50 MILES
BUT LESS THAN 80 MILES FROM THE RESPECTIVE CITY
HALL. ZONE 5: MORE THAN 80 MILES FROM THE
RESPECTIVE CITY HALL.....$ 34.42 17.63

TEAM0174-001 06/01/2025

Rates Fringes

TRUCK DRIVER: GROUP 1- ""A-FRAME OR HYDRALIFT""
TRUCKS AND BOOM TRUCKS OR SIMILAR EQUIPMENT WHEN
""A"" FRAME OR ""HYDRALIFT"" AND BOOM TRUCK OR SIMILAR
EQUIPMENT IS USED; BUGGYMOBILE; BULK CEMENT TANKER;
DUMPSTERS AND SIMILAR EQUIPMENT, TOURNOROCKERS,
TOURNOWAGON, TOURNOTRAILER, CAT DW SERIES, TERRA
COBRA, LE TOURNEAU, WESTINGHOUSE, ATHYE WAGON,
EUCLID TWO AND FOUR-WHEELED POWER TRACTOR WITH
TRAILER AND SIMILAR TOP-LOADED EQUIPMENT
TRANSPORTING MATERIAL: DUMP TRUCKS, SIDE, END AND
BOTTOM DUMP, INCLUDING SEMI-TRUCKS AND TRAINS OR
COMBINATIONS THEREOF WITH 16 YARDS TO 30 YARDS
CAPACITY: OVER 30 YARDS $.15 PER HOUR ADDITIONAL
FOR EACH 10 YARD INCREMENT; EXPLOSIVE TRUCK (FIELD

MIX) AND SIMILAR EQUIPMENT; HYSTER OPERATORS (HANDLING BULK LOOSE AGGREGATES); LOWBED AND HEAVY DUTY TRAILER; ROAD OIL DISTRIBUTOR DRIVER; SPREADER, FLAHERTY TRANSIT MIX USED EXCLUSIVELY IN HEAVY CONSTRUCTION; WATER WAGON AND TANK TRUCK-3,000 GALLONS AND OVER CAPACITY (HAZMAT PROJECTS ANYONE WORKING ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN ADDITION TO THE CLASSIFICATION WORKING IN AS FOLLOWS: LEVEL C: +$0.25 PER HOUR - THIS LEVEL USES AN AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE CLOTHING. LEVEL B: +$0.50 PER HOUR - USES SAME RESPIRATOR PROTECTION AS LEVEL A. SUPPLIED AIR LINE IS PROVIDED IN CONJUNCTION WITH A CHEMICAL ""SPLASH SUIT."" LEVEL A: +$0.75 PER HOUR - THIS LEVEL UTILIZES A FULLY- ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS OR A SUPPLIED AIR LINE.)

(CLALLAM, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC (NORTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN), PIERCE, SAN JUAN, SKAGIT, SNOHOMISH, THURSTON AND WHATCOM COUNTIES)

ZONE A: (LESS THAN 25 MILES FROM CENTER OF LISTED CITIES*). BASE RATE. ZONE B: (25-45 MILES FROM CENTER OF LISTED CITIES*): $0.70. ZONE C (OVER 45 MILES FROM CENTR OF LISTED CITIES*): $1.00. *ZONE PAY WILL BE CALCULATED FROM THE CITY CENTER OF THE FOLLOWING LISTED CITIES: BELLINGHAM, CENTRALIA, RAYMOND, OLYMPIA EVERETT, SHELTON, ANACORTES, BELLEVUE, SEATTLE, PORT ANGELES, MT. VERNON, KENT, TACOMA, PORT TOWNSEND, ABERDEEN, BREMERTON. .....$ 55.43 27.52

TRUCK DRIVER: GROUP 2- BULLLIFTS, OR SIMILAR EQUIPMENT USED IN LOADING OR UNLOADING TRUCKS, TRANSPORTING MATERIALS ON JOB SITE; DUMPSTERS, AND SIMILAR EQUIPMENT, TOURNOROCKERS, TOURNOWAGON, TURNOTRAILER, CAT. D.W. SERIES, TERRA COBRA, LE TOURNEAU, WESTINGHOUSE, ATHYE WAGON, EUCLID TWO AND FOUR-WHEELED POWER TRACTOR WITH TRAILER AND SIMILAR TOP-LOADED EQUIPMENT TRANSPORTING MATERIAL: DUMP TRUCKS, SIDE, END AND BOTTOM DUMP, INCLUDING SEMI-TRUCKS AND TRAINS OR COMBINATIONS THEREOF WITH LESS THAN 16 YARDS CAPACITY; FLATBED (DUAL REAR AXLE); GREASE TRUCK, FUEL TRUCK, GREASER, BATTERY SERVICE MAN AND/OR TIRE SERVICE MAN; LEVERMAN AND LOADER AT BUNKERS AND BATCH PLANTS; OIL TANK TRANSPORT; SCISSOR TRUCK; SLURRY TRUCK; SNO-GO AND SIMILAR EQUIPMENT; SWAMPERS; STRADDLER CARRIER (ROSS, HYSTER) AND SIMILAR EQUIPMENT; TEAM DRIVER; TRACTOR (SMALL, RUBBER-TIRED)(WHEN USED WITHIN TEAMSTER JURISDICTION); VACUUM TRUCK; WATER WAGON AND TANK TRUCKS-LESS THAN 3,000 GALLONS CAPACITY; WINCH TRUCK; WRECKER, TOW TRUCK AND SIMILAR

EQUIPMENT
(HAZMAT PROJECTS ANYONE WORKING ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN ADDITION TO THE CLASSIFICATION WORKING IN AS FOLLOWS: LEVEL C: +$0.25 PER HOUR - THIS LEVEL USES AN AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE CLOTHING. LEVEL B: +$0.50 PER HOUR - USES SAME RESPIRATOR PROTECTION AS LEVEL A. SUPPLIED AIR LINE IS PROVIDED IN CONJUNCTION WITH A CHEMICAL ""SPLASH SUIT."" LEVEL A: +$0.75 PER HOUR - THIS LEVEL UTILIZES A FULLY- ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS OR A SUPPLIED AIR LINE.)
(CLALLAM, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC (NORTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN), PIERCE, SAN JUAN, SKAGIT, SNOHOMISH, THURSTON AND WHATCOM COUNTIES)
ZONE A: (LESS THAN 25 MILES FROM CENTER OF LISTED CITIES*). BASE RATE. ZONE B: (25-45 MILES FROM CENTER OF LISTED CITIES*): $0.70. ZONE C (OVER 45 MILES FROM CENTR OF LISTED CITIES*): $1.00. *ZONE PAY WILL BE CALCULATED FROM THE CITY CENTER OF THE FOLLOWING LISTED CITIES: BELLINGHAM, CENTRALIA, RAYMOND, OLYMPIA EVERETT, SHELTON, ANACORTES, BELLEVUE, SEATTLE, PORT ANGELES, MT. VERNON, KENT, TACOMA, PORT TOWNSEND, ABERDEEN, BREMERTON. .....$ 54.59 27.52
TRUCK DRIVER: GROUP 3- FLATBED (SINGLE REAR AXLE); PICKUP SWEEPER; PICKUP TRUCK. (ADJUST GROUP 3 UPWARD BY $2.00 PER HOUR FOR ONSITE WORK ONLY)
(HAZMAT PROJECTS ANYONE WORKING ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN ADDITION TO THE CLASSIFICATION WORKING IN AS FOLLOWS: LEVEL C: +$0.25 PER HOUR - THIS LEVEL USES AN AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE CLOTHING. LEVEL B: +$0.50 PER HOUR - USES SAME RESPIRATOR PROTECTION AS LEVEL A. SUPPLIED AIR LINE IS PROVIDED IN CONJUNCTION WITH A CHEMICAL ""SPLASH SUIT."" LEVEL A: +$0.75 PER HOUR - THIS LEVEL UTILIZES A FULLY- ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS OR A SUPPLIED AIR LINE.)
(CLALLAM, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC (NORTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN), PIERCE, SAN JUAN, SKAGIT, SNOHOMISH, THURSTON AND WHATCOM COUNTIES)
ZONE A: (LESS THAN 25 MILES FROM CENTER OF LISTED CITIES*). BASE RATE. ZONE B: (25-45 MILES FROM CENTER OF LISTED CITIES*): $0.70. ZONE C (OVER 45 MILES FROM CENTR OF LISTED

CITIES*): $1.00. *ZONE PAY WILL BE CALCULATED FROM THE CITY CENTER OF THE FOLLOWING LISTED CITIES: BELLINGHAM, CENTRALIA, RAYMOND, OLYMPIA EVERETT, SHELTON, ANACORTES, BELLEVUE, SEATTLE, PORT ANGELES, MT. VERNON, KENT, TACOMA, PORT TOWNSEND, ABERDEEN, BREMERTON. .....$ 51.78 27.52

TRUCK DRIVER: GROUP 4- ESCORT OR PILOT CAR (HAZMAT PROJECTS ANYONE WORKING ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN ADDITION TO THE CLASSIFICATION WORKING IN AS FOLLOWS: LEVEL C: +$0.25 PER HOUR - THIS LEVEL USES AN AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE CLOTHING. LEVEL B: +$0.50 PER HOUR - USES SAME RESPIRATOR PROTECTION AS LEVEL A. SUPPLIED AIR LINE IS PROVIDED IN CONJUNCTION WITH A CHEMICAL ""SPLASH SUIT."" LEVEL A: +$0.75 PER HOUR - THIS LEVEL UTILIZES A FULLY- ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS OR A SUPPLIED AIR LINE.)

(CLALLAM, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC (NORTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE PACIFIC OCEAN), PIERCE, SAN JUAN, SKAGIT, SNOHOMISH, THURSTON AND WHATCOM COUNTIES)

ZONE A: (LESS THAN 25 MILES FROM CENTER OF LISTED CITIES*). BASE RATE. ZONE B: (25-45 MILES FROM CENTER OF LISTED CITIES*): $0.70. ZONE C (OVER 45 MILES FROM CENTR OF LISTED CITIES*): $1.00. *ZONE PAY WILL BE CALCULATED FROM THE CITY CENTER OF THE FOLLOWING LISTED CITIES: BELLINGHAM, CENTRALIA, RAYMOND, OLYMPIA EVERETT, SHELTON, ANACORTES, BELLEVUE, SEATTLE, PORT ANGELES, MT. VERNON, KENT, TACOMA, PORT TOWNSEND, ABERDEEN, BREMERTON. .....$ 46.81 27.52

TRUCK DRIVER: GROUP 5- MECHANIC (HAZMAT PROJECTS ANYONE WORKING ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN ADDITION TO THE CLASSIFICATION WORKING IN AS FOLLOWS: LEVEL C: +$0.25 PER HOUR - THIS LEVEL USES AN AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE CLOTHING. LEVEL B: +$0.50 PER HOUR - USES SAME RESPIRATOR PROTECTION AS LEVEL A. SUPPLIED AIR LINE IS PROVIDED IN CONJUNCTION WITH A CHEMICAL ""SPLASH SUIT."" LEVEL A: +$0.75 PER HOUR - THIS LEVEL UTILIZES A FULLY- ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS OR A SUPPLIED AIR LINE.)

(CLALLAM, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC (NORTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHKIAKUM COUNTY WEST TO THE

PACIFIC OCEAN), PIERCE, SAN JUAN, SKAGIT,
SNOHOMISH, THURSTON AND WHATCOM COUNTIES)
ZONE A: (LESS THAN 25 MILES FROM
CENTER OF LISTED CITIES*). BASE RATE. ZONE B:
(25-45 MILES FROM CENTER OF LISTED CITIES*): $0.70.
ZONE C (OVER 45 MILES FROM CENTR OF LISTED
CITIES*): $1.00. *ZONE PAY WILL BE CALCULATED
FROM THE CITY CENTER OF THE FOLLOWING LISTED
CITIES: BELLINGHAM, CENTRALIA, RAYMOND, OLYMPIA
EVERETT, SHELTON, ANACORTES, BELLEVUE, SEATTLE,
PORT ANGELES, MT. VERNON, KENT, TACOMA, PORT
TOWNSEND, ABERDEEN, BREMERTON. .....$ 54.98 27.52

TEAM0690-004 06/01/2024

	Rates	Fringes
TRUCK DRIVERS: GROUP 1- ESCORT DRIVER OR PILOT CAR; EMPLOYEE HAUL; POWER BOAT HAULING EMPLOYEES OR MATERIAL. (ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN AND YAKIMA COUNTIES) (AREA 1: LEWISTON ZONE CENTER: ASOTIN, COLUMBIA, AND GARFIELD COUNTIES; SPOKANE ZONE CENTER: ADAMS, CHELAN, DOUGLAS, FERRY, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, AND WHITMAN COUNTIES) ZONE DIFFERENTIAL: ZONE 1- BASE RATE. ZONE 2: $2.00. BASE POINTS: SPOKANE, PASCO, LEWISTON. ZONE 1: 0-45 RADIUS MILES FROM THE MAIN POST OFFICE. ZONE 2: OUTSIDE 45 RADIUS MILES FROM THE MAIN POST OFFICE. FOOTNOTE A - ANYONE WORKING ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN ADDITON TO THE CLASSIFICATION WORKING IN AS FOLLOWS: LEVEL C-D: -$0.50 PER HOUR (THIS IS THE LOWEST LEVEL OF PROTECTION. THIS LEVEL MAY USE AN AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE CLOTHING. LEVEL A-B: $1.00 PER HOUR (USES SUPPLIED AIR IS CONJUNCTION WITH A CHEMICAL SPASH SUIT OR FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS. EMPLOYEES SHALL BE PAID HAZMAT PAY IN INCREMENTS OF FOUR(4) AND EIGHT(8) HOURS. NOTE: TRUCKS PULLING EQUIPMENT TRAILERS: SHALL RECEIVE $0.15/HOUR OVER APPLICABLE TRUCK RATE.	$ 36.83	20.93
TRUCK DRIVERS: GROUP 2- FISH TRUCK; FLAT BED TRUCK; FORK LIFT (3,000 LBS. AND UNDER); LEVERPERSON (LOADING TRUCKS AT BUNKERS); TRAILER MOUNTED HYDRO SEEDER AND MULCHER; SEEDER & MULCHER; STATIONARY FUEL OPERATOR; TRACTOR (SMALL, RUBBER-TIRED, PULLING TRAILER OR SIMILAR (ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN AND YAKIMA COUNTIES) (AREA 1:		

LEWISTON ZONE CENTER: ASOTIN, COLUMBIA, AND GARFIELD COUNTIES; SPOKANE ZONE CENTER: ADAMS, CHELAN, DOUGLAS, FERRY, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, AND WHITMAN COUNTIES) ZONE DIFFERENTIAL: ZONE 1- BASE RATE. ZONE 2: $2.00. BASE POINTS: SPOKANE, PASCO, LEWISTON. ZONE 1: 0-45 RADIUS MILES FROM THE MAIN POST OFFICE. ZONE 2: OUTSIDE 45 RADIUS MILES FROM THE MAIN POST OFFICE. FOOTNOTE A - ANYONE WORKING ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN ADDITON TO THE CLASSIFICATION WORKING IN AS FOLLOWS: LEVEL C-D: -$0.50 PER HOUR (THIS IS THE LOWEST LEVEL OF PROTECTION. THIS LEVEL MAY USE AN AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE CLOTHING. LEVEL A-B: $1.00 PER HOUR (USES SUPPLIED AIR IS CONJUNCTION WITH A CHEMICAL SPASH SUIT OR FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS. EMPLOYEES SHALL BE PAID HAZMAT PAY IN INCREMENTS OF FOUR(4) AND EIGHT(8) HOURS. NOTE: TRUCKS PULLING EQUIPMENT TRAILERS: SHALL RECEIVE $0.15/HOUR OVER APPLICABLE TRUCK RATE. .....$ 39.47 20.93

TRUCK DRIVERS: GROUP 3- AUTO CRANE (2,000 LBS. CAPACITY); BUGGY MOBILE & SIMILAR; BULK CEMENT TANKS & SPREADER; DUMPTOR (6 YDS. & UNDER); FLAT BED TRUCK WITH HYDRAULLIC SYSTEM; FORK LIFT (3,001-16,000 LBS.); FUEL TRUCK DRIVER, STEAMCLEANER & WASHER; POWER OPERATED SWEEPER; RUBBER-TIRED TUNNEL JUMBO; SCISSORS TRUCK; SLURRY TRUCK DRIVER; STRADDLE CARRIER (ROSS, HYSTER, & SIMILAR); TIREPERSON; TRANSIT MIXERS & TRUCK HAULING CONCRETE (3 YD. TO & INCLUDING 6 YDS.); TRUCKS, SIDE, END, BOTTOM & ARTICULATD END DUMP (3 YARDS TO AND INCLUDING 6 YDS.); WAREHOUSEPERSON (TO INCLUDE SHIPPING & RECEIVING); WRECKER & TOW (ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN AND YAKIMA COUNTIES) (AREA 1: LEWISTON ZONE CENTER: ASOTIN, COLUMBIA, AND GARFIELD COUNTIES; SPOKANE ZONE CENTER: ADAMS, CHELAN, DOUGLAS, FERRY, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, AND WHITMAN COUNTIES) ZONE DIFFERENTIAL: ZONE 1- BASE RATE. ZONE 2: $2.00. BASE POINTS: SPOKANE, PASCO, LEWISTON. ZONE 1: 0-45 RADIUS MILES FROM THE MAIN POST OFFICE. ZONE 2: OUTSIDE 45 RADIUS MILES FROM THE MAIN POST OFFICE.
FOOTNOTE A - ANYONE WORKING ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN ADDITON TO THE CLASSIFICATION WORKING IN AS FOLLOWS: LEVEL C-D: -$0.50 PER HOUR (THIS IS THE LOWEST LEVEL OF PROTECTION. THIS LEVEL MAY USE AN AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE CLOTHING. LEVEL A-B: $1.00 PER HOUR (USES SUPPLIED AIR IS

CONJUNCTION WITH A CHEMICAL SPASH SUIT OR FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS. EMPLOYEES SHALL BE PAID HAZMAT PAY IN INCREMENTS OF FOUR(4) AND EIGHT(8) HOURS. NOTE: TRUCKS PULLING EQUIPMENT TRAILERS: SHALL RECEIVE $0.15/HOUR OVER APPLICABLE TRUCK RATE. .....$ 39.58 20.93

TRUCK DRIVERS: GROUP 4- A-FRAME; BURNER, CUTTER, & WELDER; SERVICE GRASER; TRUCKS, SIDE, END, BOTTOM & ARTICULATED END DUMP (OVER 6 YARDS TO AND INCLUDING 12 YDS.); TRUCK MOUNTED HYDRO SEEDER; WAREHOUSEPERSON; WATER TANK TRUCK (0-8,000 (ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN AND YAKIMA COUNTIES) (AREA 1: LEWISTON ZONE CENTER: ASOTIN, COLUMBIA, AND GARFIELD COUNTIES; SPOKANE ZONE CENTER: ADAMS, CHELAN, DOUGLAS, FERRY, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, AND WHITMAN COUNTIES) ZONE DIFFERENTIAL: ZONE 1- BASE RATE. ZONE 2: $2.00. BASE POINTS: SPOKANE, PASCO, LEWISTON. ZONE 1: 0-45 RADIUS MILES FROM THE MAIN POST OFFICE. ZONE 2: OUTSIDE 45 RADIUS MILES FROM THE MAIN POST OFFICE. FOOTNOTE A - ANYONE WORKING ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN ADDITON TO THE CLASSIFICATION WORKING IN AS FOLLOWS: LEVEL C-D: -$0.50 PER HOUR (THIS IS THE LOWEST LEVEL OF PROTECTION. THIS LEVEL MAY USE AN AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE CLOTHING. LEVEL A-B: $1.00 PER HOUR (USES SUPPLIED AIR IS CONJUNCTION WITH A CHEMICAL SPASH SUIT OR FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS. EMPLOYEES SHALL BE PAID HAZMAT PAY IN INCREMENTS OF FOUR(4) AND EIGHT(8) HOURS. NOTE: TRUCKS PULLING EQUIPMENT TRAILERS: SHALL RECEIVE $0.15/HOUR OVER APPLICABLE TRUCK RATE. .....$ 39.91 20.93

TRUCK DRIVERS: GROUP 5- DUMPTOR (OVER 6 YDS.); LOWBOY (50 TONS & UNDER); SELF-LOADING ROLL OFF; SEMI-TRUCK & TRAILER; TRACTOR WITH STEER TRAILER; TRANSIT MIXERS AND TRUCKS HAULING CONCRETE (OVER 6 YDS. TO AN INCLUDING 10 YDS.); TRUCKS, SIDE, END, BOTTOM AND END DUMP (OVER 12 YDS. TO & INCLUDING 20 YDS.); TRUCK-MOUNTED CRANE (WITH LOAD BEARING SURFACE EITHER MOUNTED OR PULLED, UP TO 14 TON); VACUUM TRUCK (SUPER SUCKER, GUZZLER, (ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN AND YAKIMA COUNTIES) (AREA 1: LEWISTON ZONE CENTER: ASOTIN, COLUMBIA, AND GARFIELD COUNTIES; SPOKANE ZONE CENTER: ADAMS, CHELAN, DOUGLAS, FERRY, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, AND WHITMAN COUNTIES) ZONE DIFFERENTIAL: ZONE 1- BASE RATE. ZONE 2: $2.00. BASE POINTS: SPOKANE, PASCO,

LEWISTON. ZONE 1: 0-45 RADIUS MILES FROM THE MAIN POST OFFICE. ZONE 2: OUTSIDE 45 RADIUS MILES FROM THE MAIN POST OFFICE. FOOTNOTE A - ANYONE WORKING ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN ADDITON TO THE CLASSIFICATION WORKING IN AS FOLLOWS: LEVEL C-D: -$0.50 PER HOUR (THIS IS THE LOWEST LEVEL OF PROTECTION. THIS LEVEL MAY USE AN AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE CLOTHING. LEVEL A-B: $1.00 PER HOUR (USES SUPPLIED AIR IS CONJUNCTION WITH A CHEMICAL SPASH SUIT OR FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS. EMPLOYEES SHALL BE PAID HAZMAT PAY IN INCREMENTS OF FOUR(4) AND EIGHT(8) HOURS. NOTE: TRUCKS PULLING EQUIPMENT TRAILERS: SHALL RECEIVE $0.15/HOUR OVER APPLICABLE TRUCK RATE. .....$ 40.02 20.93

TRUCK DRIVERS: GROUP 6- FLAHERTY SPREADER BOX DRIVER; FLOWBOYS; FORK LIFT (OVER 16,000 LBS.); DUMPS (SEMI-END); MECHANIC (FIELD); SEMI-END DUMPS; TRANSFER TRUCK & TRAILER; TRANSIT MIXERS & TRUCKS HAULING CONCRETE (OVER 10 YDS. TO & INCLUDING 20 YDS.); TRUCKS, SIDE, END, BOTTOM AND ARTICULATED END DUMP (OVER 20 YDS. TO & INCLUDING 40 YDS.); TRUCK AND PUP; TOURNAROCKER, DWS & SIMILAR WITH 2 OR MORE 4 WHEEL-POWER TRACKTOR WITH TRAILER, GALLONAGE OR YARDAGE SCALE, WHICHEVER IS GREATER WATER TANK TRUCK (8,001- 14,000 GALLONS); LOWBOY (OVER 50

(ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN AND YAKIMA COUNTIES) (AREA 1: LEWISTON ZONE CENTER: ASOTIN, COLUMBIA, AND GARFIELD COUNTIES; SPOKANE ZONE CENTER: ADAMS, CHELAN, DOUGLAS, FERRY, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, AND WHITMAN COUNTIES) ZONE DIFFERENTIAL: ZONE 1- BASE RATE. ZONE 2: $2.00. BASE POINTS: SPOKANE, PASCO, LEWISTON. ZONE 1: 0-45 RADIUS MILES FROM THE MAIN POST OFFICE. ZONE 2: OUTSIDE 45 RADIUS MILES FROM THE MAIN POST OFFICE. FOOTNOTE A - ANYONE WORKING ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN ADDITON TO THE CLASSIFICATION WORKING IN AS FOLLOWS: LEVEL C-D: -$0.50 PER HOUR (THIS IS THE LOWEST LEVEL OF PROTECTION. THIS LEVEL MAY USE AN AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE CLOTHING. LEVEL A-B: $1.00 PER HOUR (USES SUPPLIED AIR IS CONJUNCTION WITH A CHEMICAL SPASH SUIT OR FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS. EMPLOYEES SHALL BE PAID HAZMAT PAY IN INCREMENTS OF FOUR(4) AND EIGHT(8) HOURS. NOTE: TRUCKS PULLING EQUIPMENT TRAILERS: SHALL RECEIVE $0.15/HOUR OVER APPLICABLE TRUCK RATE. .....$ 40.22 20.93

TRUCK DRIVERS: GROUP 7- OIL DISTRIBUTOR DRIVER; STRINGER TRUCK (CABLE OPERATED TRAILER); TRANSIT

MIXERS & TRUCKS HAULING CONCRETE (OVER 20 YDS.); TRUCK, SIDE, END, BOTTOM END DUMP (OVER 40 YDS. TO & INCLUDING 100 YDS.); TRUCK MOUNTED CRANE (WITH LOAD BEARING SURFACE EITHER MOUNTED OR PULLED (16 THROUGH 25
(ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN AND YAKIMA COUNTIES) (AREA 1: LEWISTON ZONE CENTER: ASOTIN, COLUMBIA, AND GARFIELD COUNTIES; SPOKANE ZONE CENTER: ADAMS, CHELAN, DOUGLAS, FERRY, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, AND WHITMAN COUNTIES) ZONE DIFFERENTIAL: ZONE 1- BASE RATE. ZONE 2: $2.00. BASE POINTS: SPOKANE, PASCO, LEWISTON. ZONE 1: 0-45 RADIUS MILES FROM THE MAIN POST OFFICE. ZONE 2: OUTSIDE 45 RADIUS MILES FROM THE MAIN POST OFFICE. FOOTNOTE A - ANYONE WORKING ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN ADDITON TO THE CLASSIFICATION WORKING IN AS FOLLOWS: LEVEL C-D: -$0.50 PER HOUR (THIS IS THE LOWEST LEVEL OF PROTECTION. THIS LEVEL MAY USE AN AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE CLOTHING. LEVEL A-B: $1.00 PER HOUR (USES SUPPLIED AIR IS CONJUNCTION WITH A CHEMICAL SPASH SUIT OR FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS. EMPLOYEES SHALL BE PAID HAZMAT PAY IN INCREMENTS OF FOUR(4) AND EIGHT(8) HOURS. NOTE: TRUCKS PULLING EQUIPMENT TRAILERS: SHALL RECEIVE $0.15/HOUR OVER APPLICABLE TRUCK RATE. .....$ 40.56 20.93
TRUCK DRIVERS: GROUP 8- PRIME MOVERS AND STINGER TRUCK; TRUCKS, SIDE, END, BOTTOM AND ARTICULATED END DUMP (OVER 100 YDS.); HELICOPTER PILOT HAULING EMPLOYEES OR
(ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN AND YAKIMA COUNTIES) (AREA 1: LEWISTON ZONE CENTER: ASOTIN, COLUMBIA, AND GARFIELD COUNTIES; SPOKANE ZONE CENTER: ADAMS, CHELAN, DOUGLAS, FERRY, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, AND WHITMAN COUNTIES) ZONE DIFFERENTIAL: ZONE 1- BASE RATE. ZONE 2: $2.00. BASE POINTS: SPOKANE, PASCO, LEWISTON. ZONE 1: 0-45 RADIUS MILES FROM THE MAIN POST OFFICE. ZONE 2: OUTSIDE 45 RADIUS MILES FROM THE MAIN POST OFFICE. FOOTNOTE A - ANYONE WORKING ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN ADDITON TO THE CLASSIFICATION WORKING IN AS FOLLOWS: LEVEL C-D: -$0.50 PER HOUR (THIS IS THE LOWEST LEVEL OF PROTECTION. THIS LEVEL MAY USE AN AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE CLOTHING. LEVEL A-B: $1.00 PER HOUR (USES SUPPLIED AIR IS CONJUNCTION WITH A CHEMICAL SPASH SUIT OR

FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED
BREATHING APPARATUS. EMPLOYEES SHALL BE PAID HAZMAT
PAY IN INCREMENTS OF FOUR(4) AND EIGHT(8) HOURS.
NOTE: TRUCKS PULLING EQUIPMENT TRAILERS: SHALL
RECEIVE $0.15/HOUR OVER APPLICABLE TRUCK RATE. .....$ 40.88 20.93
TRUCK DRIVERS: GROUP 1- ESCORT DRIVER OR PILOT CAR;
EMPLOYEE HAUL; POWER BOAT HAULING EMPLOYEES OR
MATERIAL. (ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA,
DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS,
LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS,
WALLA WALLA, WHITMAN AND YAKIMA COUNTIES) (AREA 2:
PASCO ZONE CENTER: BENTON, FRANKLIN, WALLA WALLA
AND YAKIMA COUNTIES). ZONE DIFFERENTIAL: ZONE 1-
BASE RATE. ZONE 2: $2.00. BASE POINTS: SPOKANE,
PASCO, LEWISTON. ZONE 1: 0-45 RADIUS MILES FROM THE
MAIN POST OFFICE. ZONE 2: OUTSIDE 45 RADIUS MILES
FROM THE MAIN POST OFFICE. FOOTNOTE A - ANYONE
WORKING ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION
IS REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN
ADDITON TO THE CLASSIFICATION WORKING IN AS
FOLLOWS: LEVEL C-D: -$0.50 PER HOUR (THIS IS THE
LOWEST LEVEL OF PROTECTION. THIS LEVEL MAY USE AN
AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE
CLOTHING. LEVEL A-B: $1.00 PER HOUR (USES SUPPLIED
AIR IS CONJUNCTION WITH A CHEMICAL SPASH SUIT OR
FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED
BREATHING APPARATUS. EMPLOYEES SHALL BE PAID HAZMAT
PAY IN INCREMENTS OF FOUR(4) AND EIGHT(8) HOURS.
NOTE: TRUCKS PULLING EQUIPMENT TRAILERS: SHALL
RECEIVE $0.15/HOUR OVER APPLICABLE TRUCK RATE. .....$ 33.83 20.93
TRUCK DRIVERS: GROUP 2- FISH TRUCK; FLAT BED TRUCK;
FORK LIFT (3,000 LBS. AND UNDER); LEVERPERSON
(LOADING TRUCKS AT BUNKERS); TRAILER MOUNTED HYDRO
SEEDER AND MULCHER; SEEDER & MULCHER; STATIONARY
FUEL OPERATOR; TRACTOR (SMALL, RUBBER-TIRED,
PULLING TRAILER OR SIMILAR
(ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS,
FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS, LINCOLN,
OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA
WALLA, WHITMAN AND YAKIMA COUNTIES) (AREA 2: PASCO
ZONE CENTER: BENTON, FRANKLIN, WALLA WALLA AND
YAKIMA COUNTIES). ZONE DIFFERENTIAL: ZONE 1- BASE
RATE. ZONE 2: $2.00. BASE POINTS: SPOKANE, PASCO,
LEWISTON. ZONE 1: 0-45 RADIUS MILES FROM THE MAIN
POST OFFICE. ZONE 2: OUTSIDE 45 RADIUS MILES FROM
THE MAIN POST OFFICE. FOOTNOTE A - ANYONE WORKING
ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS
REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN
ADDITON TO THE CLASSIFICATION WORKING IN AS
FOLLOWS: LEVEL C-D: -$0.50 PER HOUR (THIS IS THE
LOWEST LEVEL OF PROTECTION. THIS LEVEL MAY USE AN
AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE
CLOTHING. LEVEL A-B: $1.00 PER HOUR (USES SUPPLIED
AIR IS CONJUNCTION WITH A CHEMICAL SPASH SUIT OR
FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED
BREATHING APPARATUS. EMPLOYEES SHALL BE PAID HAZMAT

PAY IN INCREMENTS OF FOUR(4) AND EIGHT(8) HOURS.
NOTE: TRUCKS PULLING EQUIPMENT TRAILERS: SHALL
RECEIVE $0.15/HOUR OVER APPLICABLE TRUCK RATE. .....$ 36.47 20.93
TRUCK DRIVERS: GROUP 3- AUTO CRANE (2,000 LBS.
CAPACITY); BUGGY MOBILE & SIMILAR; BULK CEMENT
TANKS & SPREADER; DUMPTOR (6 YDS. & UNDER); FLAT
BED TRUCK WITH HYDRAULLIC SYSTEM; FORK LIFT
(3,001-16,000 LBS.); FUEL TRUCK DRIVER,
STEAMCLEANER & WASHER; POWER OPERATED SWEEPER;
RUBBER-TIRED TUNNEL JUMBO; SCISSORS TRUCK; SLURRY
TRUCK DRIVER; STRADDLE CARRIER (ROSS, HYSTER, &
SIMILAR); TIREPERSON; TRANSIT MIXERS & TRUCK
HAULING CONCRETE (3 YD. TO & INCLUDING 6 YDS.);
TRUCKS, SIDE, END, BOTTOM & ARTICULATD END DUMP (3
YARDS TO AND INCLUDING 6 YDS.); WAREHOUSEPERSON (TO
INCLUDE SHIPPING & RECEIVING); WRECKER & TOW
(ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS,
FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS, LINCOLN,
OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA
WALLA, WHITMAN AND YAKIMA COUNTIES) (AREA 2: PASCO
ZONE CENTER: BENTON, FRANKLIN, WALLA WALLA AND
YAKIMA COUNTIES). ZONE DIFFERENTIAL: ZONE 1- BASE
RATE. ZONE 2: $2.00. BASE POINTS: SPOKANE, PASCO,
LEWISTON. ZONE 1: 0-45 RADIUS MILES FROM THE MAIN
POST OFFICE. ZONE 2: OUTSIDE 45 RADIUS MILES FROM
THE MAIN POST OFFICE. FOOTNOTE A - ANYONE WORKING
ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS
REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN
ADDITON TO THE CLASSIFICATION WORKING IN AS
FOLLOWS: LEVEL C-D: -$0.50 PER HOUR (THIS IS THE
LOWEST LEVEL OF PROTECTION. THIS LEVEL MAY USE AN
AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE
CLOTHING. LEVEL A-B: $1.00 PER HOUR (USES SUPPLIED
AIR IS CONJUNCTION WITH A CHEMICAL SPASH SUIT OR
FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED
BREATHING APPARATUS. EMPLOYEES SHALL BE PAID HAZMAT
PAY IN INCREMENTS OF FOUR(4) AND EIGHT(8) HOURS.
NOTE: TRUCKS PULLING EQUIPMENT TRAILERS: SHALL
RECEIVE $0.15/HOUR OVER APPLICABLE TRUCK RATE. .....$ 36.58 20.93
TRUCK DRIVERS: GROUP 4- A-FRAME; BURNER, CUTTER, &
WELDER; SERVICE GRASER; TRUCKS, SIDE, END, BOTTOM &
ARTICULATED END DUMP (OVER 6 YARDS TO AND INCLUDING
12 YDS.); TRUCK MOUNTED HYDRO SEEDER;
WAREHOUSEPERSON; WATER TANK TRUCK (0-8,000
(ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS,
FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS, LINCOLN,
OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA
WALLA, WHITMAN AND YAKIMA COUNTIES) (AREA 2: PASCO
ZONE CENTER: BENTON, FRANKLIN, WALLA WALLA AND
YAKIMA COUNTIES). ZONE DIFFERENTIAL: ZONE 1- BASE
RATE. ZONE 2: $2.00. BASE POINTS: SPOKANE, PASCO,
LEWISTON. ZONE 1: 0-45 RADIUS MILES FROM THE MAIN
POST OFFICE. ZONE 2: OUTSIDE 45 RADIUS MILES FROM
THE MAIN POST OFFICE. FOOTNOTE A - ANYONE WORKING
ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS
REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN

ADDITON TO THE CLASSIFICATION WORKING IN AS
FOLLOWS: LEVEL C-D: -$0.50 PER HOUR (THIS IS THE
LOWEST LEVEL OF PROTECTION. THIS LEVEL MAY USE AN
AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE
CLOTHING. LEVEL A-B: $1.00 PER HOUR (USES SUPPLIED
AIR IS CONJUNCTION WITH A CHEMICAL SPASH SUIT OR
FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED
BREATHING APPARATUS. EMPLOYEES SHALL BE PAID HAZMAT
PAY IN INCREMENTS OF FOUR(4) AND EIGHT(8) HOURS.
NOTE: TRUCKS PULLING EQUIPMENT TRAILERS: SHALL
RECEIVE $0.15/HOUR OVER APPLICABLE TRUCK RATE. .....$ 36.91 20.93
TRUCK DRIVERS: GROUP 5- DUMPTOR (OVER 6 YDS.);
LOWBOY (50 TONS & UNDER); SELF-LOADING ROLL OFF;
SEMI-TRUCK & TRAILER; TRACTOR WITH STEER TRAILER;
TRANSIT MIXERS AND TRUCKS HAULING CONCRETE (OVER 6
YDS. TO AN INCLUDING 10 YDS.); TRUCKS, SIDE, END,
BOTTOM AND END DUMP (OVER 12 YDS. TO & INCLUDING 20
YDS.); TRUCK-MOUNTED CRANE (WITH LOAD BEARING
SURFACE EITHER MOUNTED OR PULLED, UP TO 14 TON);
VACUUM TRUCK (SUPER SUCKER, GUZZLER,
(ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS,
FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS, LINCOLN,
OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA
WALLA, WHITMAN AND YAKIMA COUNTIES) (AREA 2: PASCO
ZONE CENTER: BENTON, FRANKLIN, WALLA WALLA AND
YAKIMA COUNTIES). ZONE DIFFERENTIAL: ZONE 1- BASE
RATE. ZONE 2: $2.00. BASE POINTS: SPOKANE, PASCO,
LEWISTON. ZONE 1: 0-45 RADIUS MILES FROM THE MAIN
POST OFFICE. ZONE 2: OUTSIDE 45 RADIUS MILES FROM
THE MAIN POST OFFICE. FOOTNOTE A - ANYONE WORKING
ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS
REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN
ADDITON TO THE CLASSIFICATION WORKING IN AS
FOLLOWS: LEVEL C-D: -$0.50 PER HOUR (THIS IS THE
LOWEST LEVEL OF PROTECTION. THIS LEVEL MAY USE AN
AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE
CLOTHING. LEVEL A-B: $1.00 PER HOUR (USES SUPPLIED
AIR IS CONJUNCTION WITH A CHEMICAL SPASH SUIT OR
FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED
BREATHING APPARATUS. EMPLOYEES SHALL BE PAID HAZMAT
PAY IN INCREMENTS OF FOUR(4) AND EIGHT(8) HOURS.
NOTE: TRUCKS PULLING EQUIPMENT TRAILERS: SHALL
RECEIVE $0.15/HOUR OVER APPLICABLE TRUCK RATE. .....$ 37.02 20.93
TRUCK DRIVERS: GROUP 6- FLAHERTY SPREADER BOX
DRIVER; FLOWBOYS; FORK LIFT (OVER 16,000 LBS.);
DUMPS (SEMI-END); MECHANIC (FIELD); SEMI-END DUMPS;
TRANSFER TRUCK & TRAILER; TRANSIT MIXERS & TRUCKS
HAULING CONCRETE (OVER 10 YDS. TO & INCLUDING 20
YDS.); TRUCKS, SIDE, END, BOTTOM AND ARTICULATED
END DUMP (OVER 20 YDS. TO & INCLUDING 40 YDS.);
TRUCK AND PUP; TOURNAROCKER, DWS & SIMILAR WITH 2
OR MORE 4 WHEEL-POWER TRACKTOR WITH TRAILER,
GALLONAGE OR YARDAGE SCALE, WHICHEVER IS GREATER
WATER TANK TRUCK (8,001- 14,000 GALLONS); LOWBOY
(OVER 50
(ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS,

FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN AND YAKIMA COUNTIES) (AREA 2: PASCO ZONE CENTER: BENTON, FRANKLIN, WALLA WALLA AND YAKIMA COUNTIES). ZONE DIFFERENTIAL: ZONE 1- BASE RATE. ZONE 2: $2.00. BASE POINTS: SPOKANE, PASCO, LEWISTON. ZONE 1: 0-45 RADIUS MILES FROM THE MAIN POST OFFICE. ZONE 2: OUTSIDE 45 RADIUS MILES FROM THE MAIN POST OFFICE. FOOTNOTE A - ANYONE WORKING ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN ADDITON TO THE CLASSIFICATION WORKING IN AS FOLLOWS: LEVEL C-D: -$0.50 PER HOUR (THIS IS THE LOWEST LEVEL OF PROTECTION. THIS LEVEL MAY USE AN AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE CLOTHING. LEVEL A-B: $1.00 PER HOUR (USES SUPPLIED AIR IS CONJUNCTION WITH A CHEMICAL SPASH SUIT OR FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS. EMPLOYEES SHALL BE PAID HAZMAT PAY IN INCREMENTS OF FOUR(4) AND EIGHT(8) HOURS. NOTE: TRUCKS PULLING EQUIPMENT TRAILERS: SHALL RECEIVE $0.15/HOUR OVER APPLICABLE TRUCK RATE. .....$ 37.22 20.93

TRUCK DRIVERS: GROUP 7- OIL DISTRIBUTOR DRIVER; STRINGER TRUCK (CABLE OPERATED TRAILER); TRANSIT MIXERS & TRUCKS HAULING CONCRETE (OVER 20 YDS.); TRUCK, SIDE, END, BOTTOM END DUMP (OVER 40 YDS. TO & INCLUDING 100 YDS.); TRUCK MOUNTED CRANE (WITH LOAD BEARING SURFACE EITHER MOUNTED OR PULLED (16 THROUGH 25
(ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN AND YAKIMA COUNTIES) (AREA 2: PASCO ZONE CENTER: BENTON, FRANKLIN, WALLA WALLA AND YAKIMA COUNTIES). ZONE DIFFERENTIAL: ZONE 1- BASE RATE. ZONE 2: $2.00. BASE POINTS: SPOKANE, PASCO, LEWISTON. ZONE 1: 0-45 RADIUS MILES FROM THE MAIN POST OFFICE. ZONE 2: OUTSIDE 45 RADIUS MILES FROM THE MAIN POST OFFICE. FOOTNOTE A - ANYONE WORKING ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN ADDITON TO THE CLASSIFICATION WORKING IN AS FOLLOWS: LEVEL C-D: -$0.50 PER HOUR (THIS IS THE LOWEST LEVEL OF PROTECTION. THIS LEVEL MAY USE AN AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE CLOTHING. LEVEL A-B: $1.00 PER HOUR (USES SUPPLIED AIR IS CONJUNCTION WITH A CHEMICAL SPASH SUIT OR FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED BREATHING APPARATUS. EMPLOYEES SHALL BE PAID HAZMAT PAY IN INCREMENTS OF FOUR(4) AND EIGHT(8) HOURS. NOTE: TRUCKS PULLING EQUIPMENT TRAILERS: SHALL RECEIVE $0.15/HOUR OVER APPLICABLE TRUCK RATE. .....$ 37.56 20.93

TRUCK DRIVERS: GROUP 8- PRIME MOVERS AND STINGER TRUCK; TRUCKS, SIDE, END, BOTTOM AND ARTICULATED END DUMP (OVER 100 YDS.); HELICOPTER PILOT HAULING EMPLOYEES OR

(ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS,
FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS, LINCOLN,
OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA
WALLA, WHITMAN AND YAKIMA COUNTIES) (AREA 2: PASCO
ZONE CENTER: BENTON, FRANKLIN, WALLA WALLA AND
YAKIMA COUNTIES). ZONE DIFFERENTIAL: ZONE 1- BASE
RATE. ZONE 2: $2.00. BASE POINTS: SPOKANE, PASCO,
LEWISTON. ZONE 1: 0-45 RADIUS MILES FROM THE MAIN
POST OFFICE. ZONE 2: OUTSIDE 45 RADIUS MILES FROM
THE MAIN POST OFFICE. FOOTNOTE A - ANYONE WORKING
ON A HAZMAT JOB, WHERE HAZMAT CERTIFICATION IS
REQUIRED, SHALL BE COMPENSATED AS A PREMIUM, IN
ADDITON TO THE CLASSIFICATION WORKING IN AS
FOLLOWS: LEVEL C-D: -$0.50 PER HOUR (THIS IS THE
LOWEST LEVEL OF PROTECTION. THIS LEVEL MAY USE AN
AIR PURIFYING RESPIRATOR OR ADDITIONAL PROTECTIVE
CLOTHING. LEVEL A-B: $1.00 PER HOUR (USES SUPPLIED
AIR IS CONJUNCTION WITH A CHEMICAL SPASH SUIT OR
FULLY ENCAPSULATED SUIT WITH A SELF-CONTAINED
BREATHING APPARATUS. EMPLOYEES SHALL BE PAID HAZMAT
PAY IN INCREMENTS OF FOUR(4) AND EIGHT(8) HOURS.
NOTE: TRUCKS PULLING EQUIPMENT TRAILERS: SHALL
RECEIVE $0.15/HOUR OVER APPLICABLE TRUCK RATE. .....$ 37.88 20.93

WELDERS - Receive rate prescribed for craft performing
operation to which welding is incidental.
==========
Note: Executive Order (EO) 13706, Establishing Paid Sick Leave
for Federal Contractors applies to all contracts subject to the
Davis-Bacon Act for which the contract is awarded (and any
solicitation was issued) on or after January 1, 2017. If this
contract is covered by the EO, the contractor must provide
employees with 1 hour of paid sick leave for every 30 hours
they work, up to 56 hours of paid sick leave each year.
Employees must be permitted to use paid sick leave for their
own illness, injury or other health-related needs, including
preventive care; to assist a family member (or person who is
like family to the employee) who is ill, injured, or has other
health-related needs, including preventive care; or for reasons
resulting from, or to assist a family member (or person who is
like family to the employee) who is a victim of, domestic
violence, sexual assault, or stalking. Additional information
on contractor requirements and worker protections under the EO
is available at https://www.dol.gov/agencies/whd/government-contracts.

Note: Executive Order 13658 generally applies to contracts subject
to the Davis-Bacon Act that were awarded on or between January 1,
2015 and January 29, 2022, and that have not been renewed or
extended on or after January 30, 2022. Executive Order 13658 does
not apply to contracts subject only to the Davis-Bacon Related Acts
regardless of when they were awarded. If a contract is subject to
Executive Order 13658, the contractor must pay all covered workers
at least $13.65 per hour (or the applicable wage rate listed on this

wage determination, if it is higher) for all hours spent performing on the contract from May 11, 2026, through December 31, 2026. The applicable Executive Order minimum wage rate will be adjusted annually. Additional information on contractor requirements and worker protections under Executive Order 13658 is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (iii)).

The body of each wage determination lists the classifications and wage rates that have been found to be prevailing for the type(s) of construction and geographic area covered by the wage determination. The classifications are listed in alphabetical order under rate identifiers indicating whether the particular rate is a union rate (current union negotiated rate), a survey rate, a weighted union average rate, a state adopted rate, or a supplemental classification rate.

Union Rate Identifiers

A four-letter identifier beginning with characters other than "SU", "UAVG", "SA", or "SC" denotes that a union rate was prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2024. PLUM is an identifier of the union whose collectively bargained rate prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2024 in the example, is the effective date of the most current negotiated rate.

Union prevailing wage rates are updated to reflect all changes over time that are reported to WHD in the rates in the collective bargaining agreement (CBA) governing the classification.

Union Average Rate Identifiers

The UAVG identifier indicates that no single rate prevailed for those classifications, but that 100% of the data reported for the classifications reflected union rates. EXAMPLE: UAVG-OH-0010 01/01/2024. UAVG indicates that the rate is a weighted union average rate. OH indicates the State of Ohio. The next number, 0010 in the example, is an internal number used in producing the wage determination. The date, 01/01/2024 in the example, indicates the date the wage determination was updated to reflect the most current union average rate.

A UAVG rate will be updated once a year, usually in January, to reflect a weighted average of the current rates in the

collective bargaining agreements on which the rate is based.

Survey Rate Identifiers

The "SU" identifier indicates that either a single non-union rate prevailed (as defined in 29 CFR 1.2) for this classification in the survey or that the rate was derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As a weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SUFL2022-007 6/27/2024. SU indicates the rate is a single non-union prevailing rate or a weighted average of survey data for that classification. FL indicates the State of Florida. 2022 is the year of the survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 6/27/2024 in the example, indicates the survey completion date for the classifications and rates under that identifier.

"SU" wage rates typically remain in effect until a new survey is conducted. However, the Wage and Hour Division (WHD) has the discretion to update such rates under 29 CFR 1.6(c)(1).

State Adopted Rate Identifiers

The "SA" identifier indicates that the classifications and prevailing wage rates set by a state (or local) government were adopted under 29 C.F.R 1.3(g)-(h). Example: SAME2023-007 01/03/2024. SA reflects that the rates are state adopted. ME refers to the State of Maine. 2023 is the year during which the state completed the survey on which the listed classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 01/03/2024 in the example, reflects the date on which the classifications and rates under the "SA" identifier took effect under state law in the state from which the rates were adopted.

WAGE DETERMINATION APPEALS PROCESS

1) Has there been an initial decision in the matter? This can be:

a) a survey underlying a wage determination
b) an existing published wage determination
c) an initial WHD letter setting forth a position on a wage determination matter
d) an initial conformance (additional classification and rate) determination

On survey related matters, initial contact, including requests for summaries of surveys, should be directed to the WHD Branch of Wage Surveys. Requests can be submitted via email to davisbaconinfo@dol.gov or by mail to:

Branch of Wage Surveys
Wage and Hour Division
U.S. Department of Labor

```
            200 Constitution Avenue, N.W.
            Washington, DC 20210
Regarding any other wage determination matter such as
conformance decisions, requests for initial decisions should be
directed to the WHD Branch of Construction Wage Determinations.
Requests can be submitted via email to BCWD-Office@dol.gov or
by mail to:
            Branch of Construction Wage Determinations
            Wage and Hour Division
            U.S. Department of Labor
            200 Constitution Avenue, N.W.
            Washington, DC 20210
2) If an initial decision has been issued, then any interested
party (those affected by the action) that disagrees with the
decision can request review and reconsideration from the Wage
and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7).
Requests for review and reconsideration can be submitted via
email to dba.reconsideration@dol.gov or by mail to:
            Wage and Hour Administrator
            U.S. Department of Labor
            200 Constitution Avenue, N.W.
            Washington, DC 20210
The request should be accompanied by a full statement of the
interested party's position and any information (wage payment
data, project description, area practice material, etc.) that
the requestor considers relevant to the issue.

3) If the decision of the Administrator is not favorable, an
interested party may appeal directly to the Administrative
Review Board (formerly the Wage Appeals Board).  Write to:
            Administrative Review Board
            U.S. Department of Labor
            200 Constitution Avenue, N.W.
            Washington, DC 20210.
================================================================
          END OF GENERAL DECISION
"
```

State of Washington
Department of Labor & Industries
Prevailing Wage Section - Telephone 360-902-5335
PO Box 44540, Olympia, WA 98504-4540

Washington State Prevailing Wage
The PREVAILING WAGES listed here include both the hourly wage rate and the hourly rate of fringe benefits. On public works projects, worker's wage and benefit rates must add to not less than this total. A brief description of overtime calculation requirements are provided on the Benefit Code Key.

Journey Level Prevailing Wage Rates for the Effective Date: 12/02/2026

Whatcom County

Trade	Job Classification	Wage	Holiday	Overtime	Note
Asbestos Abatement Workers	Journey Level	$71.10	**5D**	**1H**	
Boilermakers	Journey Level	$83.89	**5N**	**1C**	
Brick Mason	Journey Level	$82.00	**7E**	**1N**	
Brick Mason	Pointer-Caulker-Cleaner	$82.00	**7E**	**1N**	
Building Service Employees	Janitor	$17.13		**1**	
Building Service Employees	Shampooer	$17.13		**1**	
Building Service Employees	Waxer	$17.13		**1**	

Building Service Employees	Window Cleaner	$17.13		**1**	
Cabinet Makers (In Shop)	Journey Level	$24.89		**1**	
Carpenters	Acoustical Worker	$87.71	**15J**	**11U**	
Carpenters	Bridge Dock and Wharf Carpenter	$89.38	**15J**	**11U**	**9L**
Carpenters	Floor Layer & Floor Finisher	$87.71	**15J**	**11U**	
Carpenters	General Carpenter	$87.71	**15J**	**11U**	
Carpenters	Scaffold Erector	$87.71	**15J**	**11U**	
Cement Masons	Application of all Composition Mastic	$86.70	**15J**	**4U**	
Cement Masons	Application of all Epoxy Material	$86.18	**15J**	**4U**	
Cement Masons	Application of all Plastic Material	$86.70	**15J**	**4U**	
Cement Masons	Application of Sealing Compound	$86.18	**15J**	**4U**	
Cement Masons	Application of Underlayment	$86.70	**15J**	**4U**	
Cement Masons	Building General	$86.18	**15J**	**4U**	
Cement Masons	Composition or Kalman Floors	$86.70	**15J**	**4U**	

Cement Masons	Concrete Paving	$86.18	**15J**	**4U**
Cement Masons	Curb & Gutter Machine	$86.70	**15J**	**4U**
Cement Masons	Curb & Gutter, Sidewalks	$86.18	**15J**	**4U**
Cement Masons	Curing Concrete	$86.18	**15J**	**4U**
Cement Masons	Finish Colored Concrete	$86.70	**15J**	**4U**
Cement Masons	Floor Grinding	$86.70	**15J**	**4U**
Cement Masons	Floor Grinding/Polisher	$86.18	**15J**	**4U**
Cement Masons	Green Concrete Saw, self-powered	$86.70	**15J**	**4U**
Cement Masons	Grouting of all Plates	$86.18	**15J**	**4U**
Cement Masons	Grouting of all Tilt-up Panels	$86.18	**15J**	**4U**
Cement Masons	Gunite Nozzleman	$86.70	**15J**	**4U**
Cement Masons	Hand Powered Grinder	$86.70	**15J**	**4U**
Cement Masons	Journey Level	$86.18	**15J**	**4U**
Cement Masons	Patching Concrete	$86.18	**15J**	**4U**
Cement Masons	Pneumatic Power Tools	$86.70	**15J**	**4U**
Cement Masons	Power Chipping & Brushing	$86.70	**15J**	**4U**

Cement Masons	Sand Blasting Architectural Finish	$86.70	**15J**	**4U**	
Cement Masons	Screed & Rodding Machine	$86.70	**15J**	**4U**	
Cement Masons	Spackling or Skim Coat Concrete	$86.18	**15J**	**4U**	
Cement Masons	Troweling Machine Operator	$86.70	**15J**	**4U**	
Cement Masons	Troweling Machine Operator on Colored Slabs	$86.70	**15J**	**4U**	
Cement Masons	Tunnel Workers	$86.70	**15J**	**4U**	
Divers & Tenders	Bell/Vehicle/Submersible Operator (not under pressure)	$149.22	**15J**	**11T**	**9I**
Divers & Tenders	Dive Supervisor	$150.72	**15J**	**11T**	**9I**
Divers & Tenders	Diver	$149.22	**15J**	**11T**	**9I**
Divers & Tenders	Diver Tender	$95.55	**15J**	**11T**	**9I**
Divers & Tenders	Hyperbaric Worker - Compressed Air Worker 0-30.00 PSI	$120.22	**15J**	**11U**	
Divers & Tenders	Hyperbaric Worker - Compressed Air Worker 30.01-44.00 PSI	$130.16	**15J**	**11U**	

Divers & Tenders	Hyperbaric Worker - Compressed Air Worker 44.01 - 54.00 PSI	$140.11	**15J**	**11U**	
Divers & Tenders	Hyperbaric Worker - Compressed Air Worker 54.01 - 60.00 PSI	$150.05	**15J**	**11U**	
Divers & Tenders	Hyperbaric Worker - Compressed Air Worker 60.01 - 64.00 PSI	$160.00	**15J**	**11U**	
Divers & Tenders	Hyperbaric Worker - Compressed Air Worker 64.01 - 68.00 PSI	$169.94	**15J**	**11U**	
Divers & Tenders	Hyperbaric Worker - Compressed Air Worker 68.01 - 70.00 PSI	$179.88	**15J**	**11U**	
Divers & Tenders	Hyperbaric Worker - Compressed Air Worker 70.01 - 72.00 PSI	$189.83	**15J**	**11U**	
Divers & Tenders	Hyperbaric Worker - Compressed Air Worker 72.01 - 74.00 PSI	$199.77	**15J**	**11U**	
Divers & Tenders	Lead Diver (Dive Master)	$110.01	**15J**	**11T**	**9I**
Divers & Tenders	Manifold Operator (Life Support Technician)	$100.55	**15J**	**11U**	**9I**
Divers & Tenders	Remote Operated Vehicle Operator/Technician	$95.55	**15J**	**11T**	**9I**

Divers & Tenders	Remote Operated Vehicle Operator/Technician	$95.55	**15J**	**11U**	**9I**
Divers & Tenders	Remote Operated Vehicle Tender	$89.25	**15J**	**11T**	**9I**
Divers & Tenders	Stand-by Diver	$105.01	**15J**	**11T**	**9I**
Dredge Workers	Assistant Engineer	$93.71	**15Q**	**3F**	
Dredge Workers	Assistant Mate (Deckhand)	$92.99	**15Q**	**3F**	
Dredge Workers	Boatmen	$93.71	**15Q**	**3F**	
Dredge Workers	Engineer Welder	$95.52	**15Q**	**3F**	
Dredge Workers	Leverman, Hydraulic	$97.45	**15Q**	**3F**	
Dredge Workers	Mates	$93.71	**15Q**	**3F**	
Dredge Workers	Oiler	$92.99	**15Q**	**3F**	
Drywall Applicator	Journey Level	$84.77	**15O**	**11S**	
Drywall Tapers	Journey Level	$84.77	**15O**	**11S**	
Electrical Fixture Maintenance Workers	Journey Level	$17.13		**1**	
Electricians - Inside	Cable Splicer	$105.08	**7H**	**1E**	
Electricians - Inside	Construction Stock Person	$50.14	**7H**	**1D**	

Electricians - Inside	Journey Level	$98.34	**7H**	**1E**	
Electricians - Motor Shop	Craftsman	$17.13		**1**	
Electricians - Motor Shop	Journey Level	$17.13		**1**	
Electricians - Powerline Construction	Cable Splicer	$107.31	**5A**	**4D**	
Electricians - Powerline Construction	Certified Line Welder	$98.45	**5A**	**4D**	
Electricians - Powerline Construction	Groundperson	$61.75	**5A**	**4D**	
Electricians - Powerline Construction	Heavy Line Equipment Operator	$98.45	**5A**	**4D**	
Electricians - Powerline Construction	Journey Level Lineperson	$98.45	**5A**	**4D**	
Electricians - Powerline Construction	Line Equipment Operator	$84.94	**5A**	**4D**	
Electricians - Powerline Construction	Meter Installer	$61.75	**5A**	**4D**	**8W**
Electricians - Powerline Construction	Pole Sprayer	$98.45	**5A**	**4D**	
Electricians - Powerline Construction	Powderperson	$72.81	**5A**	**4D**	
Electronic Technicians	Electronic Technicians Journey Level	$65.58	**5B**	**1B**	

Elevator Constructors	Mechanic	$119.17	**7D**	**4A**	
Elevator Constructors	Mechanic In Charge	$128.95	**7D**	**4A**	
Fabricated Precast Concrete Products	Journey Level	$17.13		**1**	
Fabricated Precast Concrete Products	Journey Level - In-Factory Work Only	$17.13		**1**	
Fence Erectors	Fence Erector	$60.82	**15J**	**11X**	**9N**
Fence Erectors	Fence Laborer	$60.82	**15J**	**11X**	**9N**
Flaggers	Journey Level	$60.82	**15J**	**11X**	**9N**
Glaziers	Journey Level	$88.41	**7L**	**1Y**	
Heat & Frost Insulators And Asbestos Workers	Journey Level	$100.83	**15H**	**11C**	
Heating Equipment Mechanics	Mechanic	$103.56	**7F**	**1E**	
Hod Carriers & Mason Tenders	Journey Level	$75.00	**15J**	**11X**	**9N**
Industrial Power Vacuum Cleaner	Journey Level	$17.13		**1**	
Inland Boatmen	Boat Operator	$71.28	**5B**	**1K**	
Inland Boatmen	Cook	$69.70	**5B**	**1K**	
Inland Boatmen	Deckhand	$70.00	**5B**	**1K**	

Inland Boatmen	Deckhand Engineer	$69.55	**5B**	**1K**
Inland Boatmen	Launch Operator	$71.23	**5B**	**1K**
Inland Boatmen	Mate	$89.12	**5B**	**1K**
Inspection/Cleaning/Sealing Of Sewer & Water Systems By Remote Control	Cleaner Operator	$58.17	**15M**	**11O**
Inspection/Cleaning/Sealing Of Sewer & Water Systems By Remote Control	Foamer Operator	$58.17	**15M**	**11O**
Inspection/Cleaning/Sealing Of Sewer & Water Systems By Remote Control	Grout Truck Operator	$58.17	**15M**	**11O**
Inspection/Cleaning/Sealing Of Sewer & Water Systems By Remote Control	Head Operator	$56.10	**15M**	**11O**
Inspection/Cleaning/Sealing Of Sewer & Water Systems By Remote Control	Technician	$49.90	**15M**	**11O**
Inspection/Cleaning/Sealing Of Sewer & Water Systems By Remote Control	TV Truck Operator	$53.00	**15M**	**11O**
Insulation Applicators	Journey Level	$87.71	**15J**	**11U**
Ironworkers	Journeyman	$94.82	**15K**	**11N**

Laborers	Air, Gas Or Electric Vibrating Screed	$71.10	**15J**	**11X**	**9N**
Laborers	Airtrac Drill Operator	$73.18	**15J**	**11X**	**9N**
Laborers	Ballast Regular Machine	$71.10	**15J**	**11X**	**9N**
Laborers	Batch Weighman	$60.82	**15J**	**11X**	**9N**
Laborers	Brick Pavers	$71.10	**15J**	**11X**	**9N**
Laborers	Brush Cutter	$71.10	**15J**	**11X**	**9N**
Laborers	Brush Hog Feeder	$71.10	**15J**	**11X**	**9N**
Laborers	Burner	$71.10	**15J**	**11X**	**9N**
Laborers	Caisson Worker	$73.18	**15J**	**11X**	**9N**
Laborers	Carpenter Tender	$71.10	**15J**	**11X**	**9N**
Laborers	Cement Dumper-paving	$73.18	**15J**	**11X**	**9N**
Laborers	Cement Finisher Tender	$71.10	**15J**	**11X**	**9N**
Laborers	Change House Or Dry Shack	$71.10	**15J**	**11X**	**9N**
Laborers	Chipping Gun (30 Lbs. And Over)	$72.33	**15J**	**11X**	**9N**
Laborers	Chipping Gun (Under 30 Lbs.)	$71.10	**15J**	**11X**	**9N**
Laborers	Choker Setter	$71.10	**15J**	**11X**	**9N**

Laborers	Chuck Tender	$71.10	**15J**	**11X**	**9N**
Laborers	Clary Power Spreader	$72.33	**15J**	**11X**	**9N**
Laborers	Clean-up Laborer	$71.10	**15J**	**11X**	**9N**
Laborers	Concrete Dumper/Chute Operator	$73.18	**15J**	**11X**	**9N**
Laborers	Concrete Form Stripper	$71.10	**15J**	**11X**	**9N**
Laborers	Concrete Placement Crew	$73.18	**15J**	**11X**	**9N**
Laborers	Concrete Saw Operator/Core Driller	$72.33	**15J**	**11X**	**9N**
Laborers	Crusher Feeder	$60.82	**15J**	**11X**	**9N**
Laborers	Curing Laborer	$71.10	**15J**	**11X**	**9N**
Laborers	Demolition: Wrecking & Moving (Incl. Charred Material)	$71.10	**15J**	**11X**	**9N**
Laborers	Ditch Digger	$71.10	**15J**	**11X**	**9N**
Laborers	Diver	$73.18	**15J**	**11X**	**9N**
Laborers	Drill Operator (Hydraulic, Diamond)	$72.33	**15J**	**11X**	**9N**
Laborers	Dry Stack Walls	$71.10	**15J**	**11X**	**9N**
Laborers	Dump Person	$71.10	**15J**	**11X**	**9N**

Laborers	Epoxy Technician	$71.10	**15J**	**11X**	**9N**
Laborers	Erosion Control Worker	$71.10	**15J**	**11X**	**9N**
Laborers	Faller & Bucker Chain Saw	$72.33	**15J**	**11X**	**9N**
Laborers	Fine Graders	$71.10	**15J**	**11X**	**9N**
Laborers	Firewatch	$60.82	**15J**	**11X**	**9N**
Laborers	Form Setter	$73.18	**15J**	**11X**	**9N**
Laborers	Gabian Basket Builders	$71.10	**15J**	**11X**	**9N**
Laborers	General Laborer	$71.10	**15J**	**11X**	**9N**
Laborers	Grade Checker & Transit Person	$75.00	**15J**	**11X**	**9N**
Laborers	Grinders	$71.10	**15J**	**11X**	**9N**
Laborers	Grout Machine Tender	$71.10	**15J**	**11X**	**9N**
Laborers	Groutmen (Pressure) Including Post Tension Beams	$72.33	**15J**	**11X**	**9N**
Laborers	Guardrail Erector	$71.10	**15J**	**11X**	**9N**
Laborers	Hazardous Waste Worker (Level A)	$73.18	**15J**	**11X**	**9N**
Laborers	Hazardous Waste Worker (Level B)	$72.33	**15J**	**11X**	**9N**

Laborers	Hazardous Waste Worker (Level C)	$71.10	**15J**	**11X**	**9N**
Laborers	High Scaler	$73.18	**15J**	**11X**	**9N**
Laborers	Jackhammer	$72.33	**15J**	**11X**	**9N**
Laborers	Laserbeam Operator	$72.33	**15J**	**11X**	**9N**
Laborers	Maintenance Person	$71.10	**15J**	**11X**	**9N**
Laborers	Manhole Builder-Mudman	$72.33	**15J**	**11X**	**9N**
Laborers	Material Yard Person	$71.10	**15J**	**11X**	**9N**
Laborers	Mold Abatement Worker	$71.10	**15J**	**11X**	**9N**
Laborers	Motorman-Dinky Locomotive	$75.05	**15J**	**11X**	**9N**
Laborers	nozzleman (concrete pump, green cutter when using combination of high pressure air & water on concrete & rock, sandblast, gunite, shotcrete, water blaster, vacuum blaster)	$75.00	**15J**	**11X**	**9N**
Laborers	Pavement Breaker	$72.33	**15J**	**11X**	**9N**
Laborers	Pilot Car	$60.82	**15J**	**11X**	**9N**
Laborers	Pipe Layer (Lead)	$75.00	**15J**	**11X**	**9N**

Laborers	Pipe Layer/Tailor	$72.33	**15J**	**11X**	**9N**
Laborers	Pipe Pot Tender	$72.33	**15J**	**11X**	**9N**
Laborers	Pipe Reliner	$72.33	**15J**	**11X**	**9N**
Laborers	Pipe Wrapper	$72.33	**15J**	**11X**	**9N**
Laborers	Pot Tender	$71.10	**15J**	**11X**	**9N**
Laborers	Powderman	$73.18	**15J**	**11X**	**9N**
Laborers	Powderman's Helper	$71.10	**15J**	**11X**	**9N**
Laborers	Power Jacks	$72.33	**15J**	**11X**	**9N**
Laborers	Power Washer	$71.10	**15J**	**11X**	**9N**
Laborers	Railroad Spike Puller - Power	$72.33	**15J**	**11X**	**9N**
Laborers	Raker - Asphalt	$75.00	**15J**	**11X**	**9N**
Laborers	Re-timberman	$73.18	**15J**	**11X**	**9N**
Laborers	Remote Equipment Operator	$72.33	**15J**	**11X**	**9N**
Laborers	Rigger/Signal Person	$72.33	**15J**	**11X**	**9N**
Laborers	Rip Rap Person	$71.10	**15J**	**11X**	**9N**
Laborers	Rivet Buster	$72.33	**15J**	**11X**	**9N**

Laborers	Rodder	$73.18	**15J**	**11X**	**9N**
Laborers	Scaffold Erector	$71.10	**15J**	**11X**	**9N**
Laborers	Scale Person	$71.10	**15J**	**11X**	**9N**
Laborers	Sloper (Over 20")	$72.33	**15J**	**11X**	**9N**
Laborers	Sloper Sprayer	$71.10	**15J**	**11X**	**9N**
Laborers	Spreader (Concrete)	$73.18	**15J**	**11X**	**9N**
Laborers	Stake Hopper	$71.10	**15J**	**11X**	**9N**
Laborers	Stock Piler	$71.10	**15J**	**11X**	**9N**
Laborers	Swinging Stage/Boatswain Chair	$60.82	**15J**	**11X**	**9N**
Laborers	Tamper & Similar Electric, Air & Gas Operated Tools	$72.33	**15J**	**11X**	**9N**
Laborers	Tamper (Multiple & Self-propelled)	$72.33	**15J**	**11X**	**9N**
Laborers	Timber Person - Sewer (Lagger, Shorer & Cribber)	$72.33	**15J**	**11X**	**9N**
Laborers	Toolroom Person (at Jobsite)	$71.10	**15J**	**11X**	**9N**
Laborers	Topper	$71.10	**15J**	**11X**	**9N**
Laborers	Track Laborer	$71.10	**15J**	**11X**	**9N**

Laborers	Track Liner (Power)	$72.33	**15J**	**11X**	**9N**
Laborers	Traffic Control Laborer	$64.78	**15J**	**11X**	**9P**
Laborers	Traffic Control Supervisor	$68.42	**15J**	**11P**	**9C**
Laborers	Traffic Control Supervisor	$68.42	**15J**	**11X**	**9P**
Laborers	Truck Mounted Attenuator	$64.78	**15J**	**11X**	**9P**
Laborers	Truck Spotter	$71.10	**15J**	**11X**	**9N**
Laborers	Tugger Operator	$72.33	**15J**	**11X**	**9N**
Laborers	Tunnel Work-Compressed Air Worker 0-30 psi	$254.08	**15J**	**11X**	**9Q**
Laborers	Tunnel Work-Compressed Air Worker 30.01-44.00 psi	$259.24	**15J**	**11X**	**9Q**
Laborers	Tunnel Work-Compressed Air Worker 44.01-54.00 psi	$263.01	**15J**	**11X**	**9Q**
Laborers	Tunnel Work-Compressed Air Worker 54.01-60.00 psi	$268.85	**15J**	**11X**	**9Q**
Laborers	Tunnel Work-Compressed Air Worker 60.01-64.00 psi	$271.02	**15J**	**11X**	**9Q**
Laborers	Tunnel Work-Compressed Air Worker 64.01-68.00	$276.25	**15J**	**11X**	**9Q**

	psi				
Laborers	Tunnel Work-Compressed Air Worker 68.01-70.00 psi	$278.20	**15J**	**11X**	**9Q**
Laborers	Tunnel Work-Compressed Air Worker 70.01-72.00 psi	$280.25	**15J**	**11X**	**9Q**
Laborers	Tunnel Work-Compressed Air Worker 72.01-74.00 psi	$282.30	**15J**	**11X**	**9Q**
Laborers	Tunnel Work-Guage and Lock Tender	$75.05	**15J**	**11X**	**9N**
Laborers	Tunnel Work-Miner	$75.05	**15J**	**11X**	**9N**
Laborers	Vibrator	$73.18	**15J**	**11X**	**9N**
Laborers	Vinyl Seamer	$71.10	**15J**	**11X**	**9N**
Laborers	Watchman	$55.62	**15J**	**11X**	**9N**
Laborers	Welder	$72.33	**15J**	**11X**	**9N**
Laborers	Well Point Laborer	$72.33	**15J**	**11X**	**9N**
Laborers	Window Washer/Cleaner	$55.62	**15J**	**11X**	**9N**
Laborers - Underground Sewer & Water	General Laborer & Topman	$71.10	**15J**	**11X**	**9N**
Laborers - Underground Sewer & Water	Pipe Layer	$72.33	**15J**	**11X**	**9N**

Landscape Construction	Landscape Construction/Landscaping Or Planting Laborers	$55.62	**15J**	**11X**	**9N**
Landscape Construction	Landscape Operator	$93.00	**15J**	**11G**	**8X**
Landscape Maintenance	Groundskeeper	$17.13		**1**	
Lathers	Journey Level	$84.77	**15O**	**11S**	
Marble Setters	Journey Level	$82.00	**7E**	**1N**	
Metal Fabrication (In Shop)	Journey Level	$33.09	**15G**	**11B**	
Millwright	Journey Level	$80.28	**15J**	**4C**	
Modular Buildings	Journey Level	$17.13		**1**	
Painters	Journey Level	$58.84	**6Z**	**11J**	
Pile Driver	Crew Tender	$80.50	**15J**	**11U**	**9L**
Pile Driver	Journey Level	$89.43	**15J**	**11U**	
Plasterers	Journey Level	$81.34	**7Q**	**1R**	
Plasterers	Nozzleman	$85.44	**7Q**	**1R**	
Playground & Park Equipment Installers	Journey Level	$17.13		**1**	
Plumbers & Pipefitters	Journey Level	$99.87	**5A**	**1G**	

Power Equipment Operators	Asphalt Plant Operators	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators	Assistant Engineer	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators	Barrier Machine (zipper)	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Batch Plant Operator: concrete	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Boat Operator	$96.51	**7A**	**11H**	**8X**
Power Equipment Operators	Bobcat	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators	Brokk - Remote Demolition Equipment	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators	Brooms	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators	Bump Cutter	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Cableways	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators	Chipper	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Compressor	$88.90	**15J**	**11G**	**8X**

Power Equipment Operators	Concrete Finish Machine - Laser Screed	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators	Concrete Pump - Mounted Or Trailer High Pressure Line Pump, Pump High Pressure	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators	Concrete Pump: Truck Mount With Boom Attachment Over 42 M	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators	Concrete Pump: Truck Mount With Boom Attachment Up To 42m	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Conveyors	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators	Cranes Friction: 200 tons and over	$99.42	**7A**	**11H**	**8X**
Power Equipment Operators	Cranes, A-frame: 10 tons and under	$90.77	**7A**	**11H**	**8X**
Power Equipment Operators	Cranes: 100 tons through 199 tons, or 150' of boom (including jib with attachments)	$97.46	**7A**	**11H**	**8X**
Power Equipment Operators	Cranes: 20 tons through 44 tons with attachments	$95.64	**7A**	**11H**	**8X**
Power Equipment Operators	Cranes: 200 tons- 299 tons, or 250' of boom	$98.47	**7A**	**11H**	**8X**

	including jib with attachments				
Power Equipment Operators	Cranes: 300 tons and over or 300' of boom including jib with attachments	$99.42	**7A**	**11H**	**8X**
Power Equipment Operators	Cranes: 45 tons through 99 tons, under 150' of boom(including jib with attachments)	$96.51	**7A**	**11H**	**8X**
Power Equipment Operators	Cranes: Friction cranes through 199 tons	$98.47	**7A**	**11H**	**8X**
Power Equipment Operators	Cranes: through 19 tons with attachments, a-frame over 10 tons	$94.93	**7A**	**11H**	**8X**
Power Equipment Operators	Crusher	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Deck Engineer/Deck Winches (power)	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Derricks, On Building Work	$96.51	**7A**	**11H**	**8X**
Power Equipment Operators	Dozers D-9 & Under	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators	Drill Oilers: Auger Type, Truck Or Crane Mount	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators	Drilling Machine	$95.53	**15J**	**11G**	**8X**

Power Equipment Operators	Elevator and man-lift: permanent and shaft type	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators	Finishing Machine, Bidwell And Gamaco & Similar Equipment	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Forklift: 3000 lbs and over with attachments	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators	Forklifts: under 3000 lbs. with attachments	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators	Grade Engineer: Using Blue Prints, Cut Sheets, Etc	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Gradechecker/Stakeman	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators	Guardrail Punch	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Hard Tail End Dump Articulating Off- Road Equipment 45 Yards. & Over	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators	Hard Tail End Dump Articulating Off-road Equipment Under 45 Yards	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Horizontal/Directional Drill Locator	$93.00	**15J**	**11G**	**8X**

Power Equipment Operators	Horizontal/Directional Drill Operator	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Hydralifts/Boom Trucks Over 10 Tons	$94.93	**7A**	**11H**	**8X**
Power Equipment Operators	Hydralifts/boom trucks: 10 tons and under	$90.77	**7A**	**11H**	**8X**
Power Equipment Operators	Leverman	$96.49	**15J**	**11G**	**8X**
Power Equipment Operators	Loader, Overhead, 6 Yards. But Not Including 8 Yards	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators	Loader: Overhead 8 yards and over	$95.53	**15J**	**11G**	**8X**
Power Equipment Operators	Loaders, Overhead Under 6 Yards	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Loaders, Plant Feed	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Loaders: Elevating Type Belt	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators	Locomotives, All	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Material Transfer Device	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Mechanics: All (Leadmen - $0.50 per hour over mechanic)	$95.53	**15J**	**11G**	**8X**

Power Equipment Operators	Motor Patrol Graders	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators	Mucking Machine, Mole, Tunnel Drill, Boring, Road Header And/or Shield	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators	Oil Distributors, Blower Distribution & Mulch Seeding Operator	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators	Outside Hoists (Elevators and Manlifts), Air Tuggers, Strato	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators	Overhead, bridge type Crane: 20 tons through 44 tons	$95.64	**7A**	**11H**	**8X**
Power Equipment Operators	Overhead, bridge type: 100 tons and over	$97.46	**7A**	**11H**	**8X**
Power Equipment Operators	Overhead, bridge type: 45 tons through 99 tons	$96.51	**7A**	**11H**	**8X**
Power Equipment Operators	Pavement Breaker	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators	Pile Driver (other Than Crane Mount)	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Plant Oiler - Asphalt, Crusher	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators	Posthole Digger, Mechanical	$88.90	**15J**	**11G**	**8X**

Power Equipment Operators	Power Plant	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators	Pumps - Water	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators	Quad 9, Hd 41, D10 And Over	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators	Quick tower: no cab, under 100 feet in height base to boom	$94.93	**7A**	**11H**	**8X**
Power Equipment Operators	Remote Control Operator On Rubber Tired Earth Moving Equipment	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators	Rigger and Bellman	$90.77	**7A**	**11H**	**8X**
Power Equipment Operators	Rigger/Signal Person, Bellman(Certified)	$94.93	**7A**	**11H**	**8X**
Power Equipment Operators	Rollagon	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators	Roller, Other Than Plant Mix	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators	Roller, Plant Mix Or Multi-lift Materials	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators	Roto-mill, Roto-grinder	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Saws - Concrete	$93.00	**15J**	**11G**	**8X**

Power Equipment Operators	Scraper, Self Propelled Under 45 Yards	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Scrapers - Concrete & Carry All	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators	Scrapers, Self-propelled: 45 Yards And Over	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators	Service Engineers: Equipment	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators	Shotcrete/Gunite Equipment	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators	Shovel, Excavator, Backhoe, Tractors Under 15 Metric Tons	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators	Shovel, Excavator, Backhoe: Over 30 Metric Tons To 50 Metric Tons	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators	Shovel, Excavator, Backhoes, Tractors: 15 To 30 Metric Tons	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Shovel, Excavator, Backhoes: Over 50 Metric Tons To 90 Metric Tons	$95.53	**15J**	**11G**	**8X**
Power Equipment Operators	Shovel, Excavator, Backhoes: Over 90 Metric Tons	$96.49	**15J**	**11G**	**8X**

Power Equipment Operators	Slipform Pavers	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators	Spreader, Topsider & Screedman	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators	Subgrader Trimmer	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Tower Bucket Elevators	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators	Tower Crane: over 175' through 250' in height, base to boom	$98.47	**7A**	**11H**	**8X**
Power Equipment Operators	Tower crane: up to 175' in height base to boom	$97.46	**7A**	**11H**	**8X**
Power Equipment Operators	Tower Cranes: over 250' in height from base to boom	$99.42	**7A**	**11H**	**8X**
Power Equipment Operators	Transporters, All Track Or Truck Type	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators	Trenching Machines	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators	Truck Crane Oiler/Driver: 100 tons and over	$95.64	**7A**	**11H**	**8X**
Power Equipment Operators	Truck crane oiler/driver: under 100 tons	$94.93	**7A**	**11H**	**8X**
Power Equipment Operators	Truck Mount Portable Conveyor	$93.71	**15J**	**11G**	**8X**

Power Equipment Operators	Vac Truck (Vactor Guzzler, Hydro Excavator)	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators	Welder	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators	Wheel Tractors, Farmall Type	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators	Yo Yo Pay Dozer	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Asphalt Plant Operators	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Assistant Engineer	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Barrier Machine (zipper)	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Batch Plant Operator, Concrete	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Boat Operator	$96.51	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Bobcat	$88.90	**15J**	**11G**	**8X**

Power Equipment Operators- Underground Sewer & Water	Brokk - Remote Demolition Equipment	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Brooms	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Bump Cutter	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Cableways	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Chipper	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Compressor	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Concrete Finish Machine - Laser Screed	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Concrete Pump - Mounted Or Trailer High Pressure Line Pump, Pump High Pressure	$93.00	**15J**	**11G**	**8X**

Power Equipment Operators- Underground Sewer & Water	Concrete Pump: Truck Mount With Boom Attachment Over 42 M	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Concrete Pump: Truck Mount With Boom Attachment Up To 42m	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Conveyors	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Cranes Friction: 200 tons and over	$99.42	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Cranes, A-frame: 10 tons and under	$90.77	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Cranes: 100 tons through 199 tons, or 150' of boom (including jib with attachments)	$97.46	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Cranes: 20 tons through 44 tons with attachments	$95.64	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Cranes: 200 tons- 299 tons, or 250' of boom including jib with attachments	$98.47	**7A**	**11H**	**8X**
Power Equipment Operators- Underground	Cranes: 300 tons and over or 300' of boom including	$99.42	**7A**	**11H**	**8X**

Sewer & Water	jib with attachments				
Power Equipment Operators- Underground Sewer & Water	Cranes: 45 tons through 99 tons, under 150' of boom(including jib with attachments)	$96.51	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Cranes: Friction cranes through 199 tons	$98.47	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Cranes: through 19 tons with attachments, a-frame over 10 tons	$94.93	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Crusher	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Deck Engineer/Deck Winches (power)	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Derricks, On Building Work	$96.51	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Dozers D-9 & Under	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Drill Oilers: Auger Type, Truck Or Crane Mount	$93.00	**15J**	**11G**	**8X**

Power Equipment Operators- Underground Sewer & Water	Drilling Machine	$95.53	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Elevator and man-lift: permanent and shaft type	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Finishing Machine, Bidwell And Gamaco & Similar Equipment	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Forklift: 3000 lbs and over with attachments	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Forklifts: under 3000 lbs. with attachments	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Grade Engineer: Using Blue Prints, Cut Sheets, Etc	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Gradechecker/Stakeman	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Guardrail Punch	$93.71	**15J**	**11G**	**8X**

Power Equipment Operators- Underground Sewer & Water	Hard Tail End Dump Articulating Off- Road Equipment 45 Yards. & Over	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Hard Tail End Dump Articulating Off-road Equipment Under 45 Yards	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Horizontal/Directional Drill Locator	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Horizontal/Directional Drill Operator	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Hydralifts/boom trucks: 10 tons and under	$90.77	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Hydralifts/boom trucks: over 10 tons	$94.93	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Leverman	$96.49	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Loader, Overhead, 6 Yards. But Not Including 8 Yards	$94.54	**15J**	**11G**	**8X**

Power Equipment Operators- Underground Sewer & Water	Loader: Overhead 8 yards and over	$95.53	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Loaders, Overhead Under 6 Yards	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Loaders, Plant Feed	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Loaders: Elevating Type Belt	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Locomotives, All	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Material Transfer Device	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Mechanics: All (Leadmen - $0.50 per hour over mechanic)	$95.53	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Motor Patrol Graders	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Mucking Machine, Mole, Tunnel Drill, Boring, Road Header And/or Shield	$94.54	**15J**	**11G**	**8X**

Power Equipment Operators- Underground Sewer & Water	Oil Distributors, Blower Distribution & Mulch Seeding Operator	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Outside Hoists (Elevators and Manlifts), Air Tuggers, Strato	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Overhead, bridge type Crane: 20 tons through 44 tons	$95.64	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Overhead, bridge type: 100 tons and over	$97.46	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Overhead, bridge type: 45 tons through 99 tons	$96.51	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Pavement Breaker	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Pile Driver (other Than Crane Mount)	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Plant Oiler - Asphalt, Crusher	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Posthole Digger, Mechanical	$88.90	**15J**	**11G**	**8X**

Power Equipment Operators- Underground Sewer & Water	Power Plant	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Pumps - Water	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Quad 9, Hd 41, D10 And Over	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Quick tower: no cab, under 100 feet in height base to boom	$94.93	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Remote Control Operator On Rubber Tired Earth Moving Equipment	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Rigger and Bellman	$90.77	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Rigger/Signal Person, Bellman(Certified)	$94.93	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Rollagon	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Roller, Other Than Plant Mix	$88.90	**15J**	**11G**	**8X**

Power Equipment Operators- Underground Sewer & Water	Roller, Plant Mix Or Multi-lift Materials	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Roto-mill, Roto-grinder	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Saws - Concrete	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Scraper, Self Propelled Under 45 Yards	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Scrapers - Concrete & Carry All	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Scrapers, Self-propelled: 45 Yards And Over	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Service Engineers: Equipment	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Shotcrete/Gunite Equipment	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Shovel, Excavator, Backhoe, Tractors Under 15 Metric Tons	$93.00	**15J**	**11G**	**8X**

Power Equipment Operators- Underground Sewer & Water	Shovel, Excavator, Backhoe: Over 30 Metric Tons To 50 Metric Tons	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Shovel, Excavator, Backhoes, Tractors: 15 To 30 Metric Tons	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Shovel, Excavator, Backhoes: Over 50 Metric Tons To 90 Metric Tons	$95.53	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Shovel, Excavator, Backhoes: Over 90 Metric Tons	$96.49	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Slipform Pavers	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Spreader, Topsider & Screedman	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Subgrader Trimmer	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Tower Bucket Elevators	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Tower Crane: over 175' through 250' in height, base to boom	$98.47	**7A**	**11H**	**8X**

Power Equipment Operators- Underground Sewer & Water	Tower crane: up to 175' in height base to boom	$97.46	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Tower Cranes: over 250' in height from base to boom	$99.42	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Transporters, All Track Or Truck Type	$94.54	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Trenching Machines	$93.00	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Truck Crane Oiler/Driver: 100 tons and over	$95.64	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Truck crane oiler/driver: under 100 tons	$94.93	**7A**	**11H**	**8X**
Power Equipment Operators- Underground Sewer & Water	Truck Mount Portable Conveyor	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Vac Truck (Vactor Guzzler, Hydro Excavator)	$93.71	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Welder	$94.54	**15J**	**11G**	**8X**

Power Equipment Operators- Underground Sewer & Water	Wheel Tractors, Farmall Type	$88.90	**15J**	**11G**	**8X**
Power Equipment Operators- Underground Sewer & Water	Yo Yo Pay Dozer	$93.71	**15J**	**11G**	**8X**
Power Line Clearance Tree Trimmers	Journey Level In Charge	$69.62	**5A**	**4A**	
Power Line Clearance Tree Trimmers	Spray Person	$65.89	**5A**	**4A**	
Power Line Clearance Tree Trimmers	Tree Equipment Operator	$69.62	**5A**	**4A**	
Power Line Clearance Tree Trimmers	Tree Trimmer	$62.19	**5A**	**4A**	
Power Line Clearance Tree Trimmers	Tree Trimmer Groundperson	$45.73	**5A**	**4A**	
Refrigeration & Air Conditioning Mechanics	Journey Level	$107.19	**6Z**	**1G**	
Residential Brick Mason	Journey Level	$82.00	**7E**	**1N**	
Residential Carpenters	Journey Level	$67.79		**1**	
Residential Cement Masons	Journey Level	$35.24		**1**	
Residential Drywall Applicators	Journey Level	$31.72		**1**	
Residential Drywall Tapers	Journey Level	$33.16		**1**	

Residential Electricians	Journey Level	$49.97	**7F**	**1D**
Residential Glaziers	Journey Level	$21.22		**1**
Residential Insulation Applicators	Journey Level	$33.75		**1**
Residential Laborers	Journey Level	$28.59		**1**
Residential Marble Setters	Journey Level	$82.00	**7E**	**1N**
Residential Painters	Journey Level	$30.66		**1**
Residential Plumbers & Pipefitters	Journey Level	$40.83		**1**
Residential Refrigeration & Air Conditioning Mechanics	Journey Level	$61.75	**5A**	**1G**
Residential Sheet Metal Workers	Journey Level (Field or Shop)	$56.10	**7J**	**1I**
Residential Soft Floor Layers	Journey Level	$36.37		**1**
Residential Sprinkler Fitters (Fire Protection)	Journey Level	$19.32		**1**
Residential Stone Masons	Journey Level	$82.00	**7E**	**1N**
Residential Terrazzo Workers	Journey Level	$17.13		**1**
Residential Terrazzo/Tile Finishers	Journey Level	$18.09		**1**

Residential Tile Setters	Journey Level	$17.13		**1**
Roofers	Journey Level	$70.70	**5A**	**3H**
Roofers	Using Irritable Bituminous Materials	$74.15	**5A**	**3H**
Sheet Metal Workers	Journey Level (Field or Shop)	$103.56	**7F**	**1E**
Shipbuilding & Ship Repair	New Construction Boilermaker	$63.08	**7X**	**4J**
Shipbuilding & Ship Repair	New Construction Carpenter	$51.85	**7X**	**4J**
Shipbuilding & Ship Repair	New Construction Crane Operator	$44.29	**7V**	**1**
Shipbuilding & Ship Repair	New Construction Electrician	$63.26	**7X**	**4J**
Shipbuilding & Ship Repair	New Construction Heat & Frost Insulator	$100.83	**15H**	**11C**
Shipbuilding & Ship Repair	New Construction Laborer	$62.85	**7X**	**4J**
Shipbuilding & Ship Repair	New Construction Machinist	$63.08	**7X**	**4J**
Shipbuilding & Ship Repair	New Construction Operating Engineer	$44.29	**7V**	**1**
Shipbuilding & Ship Repair	New Construction Painter	$62.94	**7X**	**4J**

Shipbuilding & Ship Repair	New Construction Pipefitter	$64.14	**7X**	**4J**
Shipbuilding & Ship Repair	New Construction Rigger	$63.08	**7X**	**4J**
Shipbuilding & Ship Repair	New Construction Sheet Metal	$63.02	**7X**	**4J**
Shipbuilding & Ship Repair	New Construction Shipwright	$51.85	**7X**	**4J**
Shipbuilding & Ship Repair	New Construction Warehouse/Teamster	$44.29	**7V**	**1**
Shipbuilding & Ship Repair	New Construction Welder / Burner	$63.08	**7X**	**4J**
Shipbuilding & Ship Repair	Ship Repair Boilermaker	$63.08	**7X**	**4J**
Shipbuilding & Ship Repair	Ship Repair Carpenter	$51.85	**7X**	**4J**
Shipbuilding & Ship Repair	Ship Repair Crane Operator	$45.06	**7Y**	**4K**
Shipbuilding & Ship Repair	Ship Repair Electrician	$63.26	**7X**	**4J**
Shipbuilding & Ship Repair	Ship Repair Heat & Frost Insulator	$100.83	**15H**	**11C**
Shipbuilding & Ship Repair	Ship Repair Laborer	$62.85	**7X**	**4J**
Shipbuilding & Ship Repair	Ship Repair Machinist	$63.08	**7X**	**4J**
Shipbuilding & Ship Repair	Ship Repair Operating Engineer	$45.06	**7Y**	**4K**

Shipbuilding & Ship Repair	Ship Repair Painter	$62.94	**7X**	**4J**	
Shipbuilding & Ship Repair	Ship Repair Pipefitter	$64.14	**7X**	**4J**	
Shipbuilding & Ship Repair	Ship Repair Rigger	$63.08	**7X**	**4J**	
Shipbuilding & Ship Repair	Ship Repair Sheet Metal	$63.02	**7X**	**4J**	
Shipbuilding & Ship Repair	Ship Repair Shipwright	$51.85	**7X**	**4J**	
Shipbuilding & Ship Repair	Ship Repair Warehouse / Teamster	$45.06	**7Y**	**4K**	
Sign Makers & Installers (Electrical)	Journey Level	$17.13		**1**	
Sign Makers & Installers (Non-Electrical)	Journey Level	$17.13		**1**	
Soft Floor Layers	Journey Level	$70.17	**15J**	**4C**	
Solar Controls For Windows	Journey Level	$17.13		**1**	
Sprinkler Fitters (Fire Protection)	Journey Level	$83.61	**7J**	**1R**	
Stage Rigging Mechanics (Non Structural)	Journey Level	$17.13		**1**	
Stone Masons	Journey Level	$82.00	**7E**	**1N**	
Street And Parking Lot Sweeper Workers	Journey Level	$17.13		**1**	
Surveyors	Assistant Construction Site Surveyor	$94.93	**7A**	**11H**	**8X**

Surveyors	Chainman	$90.77	**7A**	**11H**	**8X**
Surveyors	Construction Site Surveyor	$96.51	**7A**	**11H**	**8X**
Surveyors	Drone Operator (when used in conjunction with survey work only)	$90.77	**7A**	**11H**	**8X**
Surveyors	Ground Penetrating Radar Operator	$90.77	**7A**	**11H**	**8X**
Telecommunication Technicians	Telecom Technician Journey Level	$65.58	**5B**	**1B**	
Telephone Line Construction - Outside	Cable Splicer	$42.62	**5A**	**2B**	
Telephone Line Construction - Outside	Hole Digger/Ground Person	$27.97	**5A**	**2B**	
Telephone Line Construction - Outside	Telephone Equipment Operator (Light)	$35.60	**5A**	**2B**	
Telephone Line Construction - Outside	Telephone Lineperson	$40.28	**5A**	**2B**	
Terrazzo Workers	Journey Level	$73.71	**7E**	**1N**	
Tile Setters	Journey Level	$71.71	**7E**	**1N**	
Tile, Marble & Terrazzo Finishers	Finisher	$62.54	**7E**	**1N**	
Traffic Control Stripers	All cleanup required in connection with traffic	$98.49	**15L**	**1K**	

	control stripers work (Group 1)			
Traffic Control Stripers	Handling, painting and installing of all car stops, stop signs and any other type sign (Group 2)	$62.69	**15L**	**1K**
Traffic Control Stripers	Installation of guard rail and posts and similar protective devices (Group 2)	$62.69	**15L**	**1K**
Traffic Control Stripers	Installation of parking gates, ticket spitters and other mechanical and automatic control devices (Group 2)	$62.69	**15L**	**1K**
Traffic Control Stripers	Installation of plastic metal or composition button, or lines used instead of paint (Group 1)	$98.49	**15L**	**1K**
Traffic Control Stripers	Line removal; chemical sand and hydro-blast, paint and button (Group 1)	$98.49	**15L**	**1K**
Traffic Control Stripers	Manufacturing and installation of all car stops and control devices and similar traffic regulators (Group 2)	$62.69	**15L**	**1K**

Traffic Control Stripers	Manufacturing, painting, stenciling, servicing, repairing, placing and removal of traffic safety and control devices/barricades (Group 2)	$62.69	**15L**	**1K**	
Traffic Control Stripers	Painting and installing lines, arrows, bumpers, curbs, etc., on parking lots, air fields, highways, game courts (Group 1)	$98.49	**15L**	**1K**	
Traffic Control Stripers	Preparation and maintenance of all surfaces (Group 1)	$98.49	**15L**	**1K**	
Traffic Control Stripers	Seal coating, slurry coating and other surface protection (Group 2)	$62.69	**15L**	**1K**	
Truck Drivers	Asphalt Mix Over 16 Yards	$86.20	**15J**	**11M**	**8L**
Truck Drivers	Asphalt Mix To 16 Yards	$85.36	**15J**	**11M**	**8L**
Truck Drivers	Dump Truck	$85.36	**15J**	**11M**	**8L**
Truck Drivers	Dump Truck & Trailer	$86.20	**15J**	**11M**	**8L**
Truck Drivers	Other Trucks	$86.20	**15J**	**11M**	**8L**
Truck Drivers - Ready Mix	Transit Mix	$86.20	**15J**	**11M**	**8L**

Well Drillers & Irrigation Pump Installers	Irrigation Pump Installer	$17.13	**1**
Well Drillers & Irrigation Pump Installers	Oiler	$17.13	**1**
Well Drillers & Irrigation Pump Installers	Well Driller	$18.02	**1**

Washington State Department of Labor and Industries
Policy Statement
(Regarding the Production of "Standard" or "Non-standard" Items)

Below is the department's (State L&I's) list of criteria to be used in determining whether a prefabricated item is "standard" or "non-standard". For items not appearing on WSDOT's predetermined list, these criteria shall be used by the Contractor (and the Contractor's subcontractors, agents to subcontractors, suppliers, manufacturers, and fabricators) to determine coverage under RCW 39.12. The production, in the State of Washington, of non-standard items is covered by RCW 39.12, and the production of standard items is not. The production of any item outside the State of Washington is not covered by RCW 39.12.

1. Is the item fabricated for a public works project? If not, it is not subject to RCW 39.12. If it is, go to question 2.

2. Is the item fabricated on the public works jobsite? If it is, the work is covered under RCW 39.12. If not, go to question 3.

3. Is the item fabricated in an assembly/fabrication plant set up for, and dedicated primarily to, the public works project? If it is, the work is covered by RCW 39.12. If not, go to question 4.

4. Does the item require any assembly, cutting, modification or other fabrication by the supplier? If not, the work is not covered by RCW 39.12. If yes, go to question 5.

5. Is the prefabricated item intended for the public works project typically an inventory item which could reasonably be sold on the general market? If not, the work is covered by RCW 39.12. If yes, go to question 6.

6. Does the specific prefabricated item, generally defined as standard, have any unusual characteristics such as shape, type of material, strength requirements, finish, etc? If yes, the work is covered under RCW 39.12.

Any firm with questions regarding the policy, WSDOT's Predetermined List, or for determinations of covered and non-covered workers shall be directed to State L&I at (360) 902-5330.

WSDOT's
Predetermined List for
Suppliers - Manufactures - Fabricator

Below is a list of potentially prefabricated items, originally furnished by WSDOT to Washington State Department of Labor and Industries, that may be considered non-standard and therefore covered by the prevailing wage law, RCW 39.12. Items marked with an X in the "YES" column should be considered to be non-standard and therefore covered by RCW 39.12. Items marked with an X in the "NO" column should be considered to be standard and therefore not covered. Of course, exceptions to this general list may occur, and in that case shall be evaluated according to the criteria described in State and L&I's policy statement.

	ITEM DESCRIPTION	YES	NO
1.	Metal rectangular frames, solid metal covers, herringbone grates, and bi-directional vaned grates for Catch Basin Types 1, 1L, 1P, and 2 and Concrete Inlets. See Std. Plans		X
2.	Metal circular frames (rings) and covers, circular grates, and prefabricated ladders for Manhole Types 1, 2, and 3, Drywell Types 1, 2, and 3 and Catch Basin Type 2. See Std. Plans		X
3.	Prefabricated steel grate supports and welded grates, metal frames and dual vaned grates, and Type 1, 2, and 3 structural tubing grates for Drop Inlets. See Std. Plans.		X
4.	Concrete Pipe - Plain Concrete pipe and reinforced concrete pipe Class 2 to 5 sizes smaller than 60 inch diameter.		X
5.	Concrete Pipe - Plain Concrete pipe and reinforced concrete pipe Class 2 to 5 sizes larger than 60 inch diameter.		X
6.	Corrugated Steel Pipe - Steel lock seam corrugated pipe for culverts and storm sewers, sizes 30 inch to 120 inches in diameter. May also be treated, 1 thru 5.		X
7.	Corrugated Aluminum Pipe - Aluminum lock seam corrugated pipe for culverts and storm sewers, sizes 30 inch to 120 inches in diameter. May also be treated, #5.		X

	ITEM DESCRIPTION	YES	NO
8.	Anchor Bolts & Nuts - Anchor Bolts and Nuts, for mounting sign structures, luminaries and other items, shall be made from commercial bolt stock. See Contract Plans and Std. Plans for size and material type.		X
9.	Aluminum Pedestrian Handrail - Pedestrian handrail conforming to the type and material specifications set forth in the contract plans. Welding of aluminum shall be in accordance with Section 9-28.14(3).	X	
10.	Major Structural Steel Fabrication - Fabrication of major steel items such as trusses, beams, girders, etc., for bridges.	X	
11.	Minor Structural Steel Fabrication - Fabrication of minor steel Items such as special hangers, brackets, access doors for structures, access ladders for irrigation boxes, bridge expansion joint systems, etc., involving welding, cutting, punching and/or boring of holes. See Contact Plans for item description and shop drawings.	X	
12.	Aluminum Bridge Railing Type BP - Metal bridge railing conforming to the type and material specifications set forth in the Contract Plans. Welding of aluminum shall be in accordance with Section 9-28.14(3).		X
13.	Concrete Piling--Precast-Prestressed concrete piling for use as 55 and 70 ton concrete piling. Concrete to conform to Section 9-19.1 of Std. Spec..	X	
14.	Precast Manhole Types 1, 2, and 3 with cones, adjustment sections and flat top slabs. See Std. Plans.		X
15.	Precast Drywell Types 1, 2, and with cones and adjustment Sections. See Std. Plans.		X
16.	Precast Catch Basin - Catch Basin type 1, 1L, 1P, and 2 With adjustment sections. See Std. Plans.		X

	ITEM DESCRIPTION	YES	NO
17.	Precast Concrete Inlet - with adjustment sections, See Std. Plans		X
18.	Precast Drop Inlet Type 1 and 2 with metal grate supports. See Std. Plans.		X
19.	Precast Grate Inlet Type 2 with extension and top units. See Std. Plans		X
20.	Metal frames, vaned grates, and hoods for Combination Inlets. See Std. Plans		X
21.	Precast Concrete Utility Vaults - Precast Concrete utility vaults of various sizes. Used for in ground storage of utility facilities and controls. See Contract Plans for size and construction requirements. Shop drawings are to be provided for approval prior to casting.		X
22.	Vault Risers - For use with Valve Vaults and Utilities Vaults.		X
23.	Valve Vault - For use with underground utilities. See Contract Plans for details.		X
24.	Precast Concrete Barrier - Precast Concrete Barrier for use as new barrier or may also be used as Temporary Concrete Barrier. Only new state approved barrier may be used as permanent barrier.		X
25.	Reinforced Earth Wall Panels – Reinforced Earth Wall Panels in size and shape as shown in the Plans. Fabrication plant has annual approval for methods and materials to be used. See Shop Drawing. Fabrication at other locations may be approved, after facilities inspection, contact HQ. Lab.	X	
26.	Precast Concrete Walls - Precast Concrete Walls - tilt-up wall panel in size and shape as shown in Plans. Fabrication plant has annual approval for methods and materials to be used	X	

	ITEM DESCRIPTION	YES	NO
27.	Precast Railroad Crossings - Concrete Crossing Structure Slabs.	X	
28.	12, 18 and 26 inch Standard Precast Prestressed Girder – Standard Precast Prestressed Girder for use in structures. Fabricator plant has annual approval of methods and materials To be used. Shop Drawing to be provided for approval prior to casting girders. See Std. Spec. Section 6-02.3(25)A	X	
29.	Prestressed Concrete Girder Series 4-14 - Prestressed Concrete Girders for use in structures. Fabricator plant has annual approval of methods and materials to be used. Shop Drawing to be provided for approval prior to casting girders. See Std. Spec. Section 6-02.3(25)A.	X	
30.	Prestressed Tri-Beam Girder - Prestressed Tri-Beam Girders for use in structures. Fabricator plant has annual approval of methods and materials to be used. Shop Drawing to be provided for approval prior to casting girders. See Std. Spec. Section 6-02.3(25)A	X	
31.	Prestressed Precast Hollow-Core Slab – Precast Prestressed Hollow-core slab for use in structures. Fabricator plant has Annual approval of methods and materials to be used. Shop Drawing to be provided for approval prior to casting girders. See Std. Spec. Section 6-02.3(25)A.	X	
32.	Prestressed-Bulb Tee Girder - Bulb Tee Prestressed Girder for use in structures. Fabricator plant has annual approval of methods and materials to be used. Shop Drawing to be provided for approval prior to casting girders. See Std. Spec. Section 6-02.3(25)A	X	
33.	Monument Case and Cover See Std. Plan.		X

	ITEM DESCRIPTION	YES	NO
34.	Cantilever Sign Structure - Cantilever Sign Structure fabricated from steel tubing meeting AASHTO-M-183. See Std. Plans, and Contract Plans for details. The steel structure shall be galvanized after fabrication in accordance with AASHTO-M-111.	X	
35.	Mono-tube Sign Structures - Mono-tube Sign Bridge fabricated to details shown in the Plans. Shop drawings for approval are required prior to fabrication.	X	
36.	Steel Sign Bridges - Steel Sign Bridges fabricated from steel tubing meeting AASHTO-M-138 for Aluminum Alloys. See Std. Plans, and Contract Plans for details. The steel Structure shall be galvanized after fabrication in accordance with AASHTO-M-111.	X	
37.	Steel Sign Post - Fabricated Steel Sign Posts as detailed in Std Plans. Shop drawings for approval are to be provided prior to fabrication		X
38.	Light Standard-Prestressed - Spun, prestressed, hollow concrete poles.	X	
39.	Light Standards - Lighting Standards for use on highway illumination systems, poles to be fabricated to conform with methods and materials as specified on Std. Plans. See Specia Provisions for pre-approved drawings.	X	
40.	Traffic Signal Standards - Traffic Signal Standards for use on highway and/or street signal systems. Standards to be fabricated to conform with methods and material as specified on Std. Plans. See Special Provisions for pre-approved drawings	X	
41.	Precast Concrete Sloped Mountable Curb (Single and Dual Faced) See Std. Plans.		X

	ITEM DESCRIPTION	YES	NO
42.	Traffic Signs - Prior to approval of a Fabricator of Traffic Signs, the sources of the following materials must be submitted and approved for reflective sheeting, legend material, and luminum sheeting. **NOTE:** *** Fabrication inspection required. Only signs tagged "Fabrication Approved" by WSDOT Sign Fabrication Inspector to be installed.	X	X
		Custom Message	Std Signing Message
43.	Cutting & bending reinforcing steel		X
44.	Guardrail components	X	X
		Custom End Sec	Standard Sec
45.	Aggregates/Concrete mixes	Covered by WAC 296-127-018	
46.	Asphalt	Covered by WAC 296-127-018	
47.	Fiber fabrics		X
48.	Electrical wiring/components		X
49.	treated or untreated timber pile		X
50.	Girder pads (elastomeric bearing)	X	
51.	Standard Dimension lumber		X
52.	Irrigation components		X

ITEM DESCRIPTION	YES	NO
53. Fencing materials		X
54. Guide Posts		X
55. Traffic Buttons		X
56. Epoxy		X
57. Cribbing		X
58. Water distribution materials		X
59. Steel "H" piles		X
60. Steel pipe for concrete pile casings, standard		X
Steel pipe for concrete pile casings, custom	X	
61. Steel pile tips, standard		X
62. Steel pile tips, custom	X	

Prefabricated items specifically produced for public works projects that are prefabricated in a county other than the county wherein the public works project is to be completed, the wage for the offsite prefabrication shall be the applicable prevailing wage for the county in which the actual prefabrication takes place.

It is the manufacturer of the prefabricated product to verify that the correct county wage rates are applied to work they perform.

See RCW 39.12.010
(The definition of "locality" in RCW 39.12.010(2) contains the phrase "wherein the physical work is being performed." The department interprets this phrase to mean the actual work site.

WSDOT's List of State Occupations not applicable to Heavy and Highway Construction Projects

This project is subject to the state hourly minimum rates for wages and fringe benefits in the contract provisions, as provided by the state Department of Labor and Industries.
The following list of occupations, is comprised of those occupations that are not normally used in the construction of heavy and highway projects.
When considering job classifications for use and / or payment when bidding on, or building heavy and highway construction projects for, or administered by WSDOT, these Occupations will be excepted from the included "Washington State Prevailing Wage Rates For Public Work Contracts" documents.

- Building Service Employees
- Electrical Fixture Maintenance Workers
- Electricians - Motor Shop
- Heating Equipment Mechanics
- Industrial Engine and Machine Mechanics
- Industrial Power Vacuum Cleaners
- Inspection, Cleaning, Sealing of Water Systems by Remote Control
- Laborers - Underground Sewer & Water
- Machinists (Hydroelectric Site Work)
- Modular Buildings
- Playground & Park Equipment Installers
- Power Equipment Operators - Underground Sewer & Water
- Residential *** ALL ASSOCIATED RATES ***
- Sign Makers and Installers (Non-Electrical)
- Sign Makers and Installers (Electrical)
- Stage Rigging Mechanics (Non Structural)

The following occupations may be used only as outlined in the preceding text concerning "WSDOT's list for Suppliers - Manufacturers - Fabricators"

- Fabricated Precast Concrete Products
- Metal Fabrication (In Shop)

Definitions for the Scope of Work for prevailing wages may be found at the Washington State Department of Labor and Industries web site and in WAC Chapter 296-127.

Washington State Department of Labor and Industries
Policy Statements
(Regarding Production and Delivery of Gravel, Concrete, Asphalt, etc.)

WAC 296-127-018 Agency filings affecting this section

Coverage and exemptions of workers involved in the production and delivery of gravel, concrete, asphalt, or similar materials.

(1) The materials covered under this section include but are not limited to: Sand, gravel, crushed rock, concrete, asphalt, or other similar materials.

(2) All workers, regardless of by whom employed, are subject to the provisions of chapter 39.12 RCW when they perform any or all of the following functions:

(a) They deliver or discharge any of the above-listed materials to a public works project site:

(i) At one or more point(s) directly upon the location where the material will be incorporated into the project; or

(ii) At multiple points at the project; or

(iii) Adjacent to the location and coordinated with the incorporation of those materials.

(b) They wait at or near a public works project site to perform any tasks subject to this section of the rule.

(c) They remove any materials from a public works construction site pursuant to contract requirements or specifications (e.g., excavated materials, materials from demolished structures, clean-up materials, etc.).

(d) They work in a materials production facility (e.g., batch plant, borrow pit, rock quarry, etc.,) which is established for a public works project for the specific, but not necessarily exclusive, purpose of supplying materials for the project.

(e) They deliver concrete to a public works site regardless of the method of incorporation.

(f) They assist or participate in the incorporation of any materials into the public works project.

(3) All travel time that relates to the work covered under subsection (2) of this section requires the payment of prevailing wages. Travel time includes time spent waiting to load, loading, transporting, waiting to unload, and delivering materials. Travel time would include all time spent in travel in support of a public works project whether the vehicle is empty or full. For example, travel time spent returning to a supply source to obtain another load of material for use on a public works site or returning to the public works site to obtain another load of excavated material is time spent in travel that is subject to prevailing wage. Travel to a supply source, including travel from a public works site, to obtain materials for use on a private project would not be travel subject to the prevailing wage.

(4) Workers are not subject to the provisions of chapter 39.12 RCW when they deliver materials to a stockpile.

(a) A "stockpile" is defined as materials delivered to a pile located away from the site of incorporation such that the stockpiled materials must be physically moved from the stockpile and transported to another location on the project site in order to be incorporated into the project.

(b) A stockpile does not include any of the functions described in subsection (2)(a) through (f) of this section; nor does a stockpile include materials delivered or distributed to multiple locations upon the project site; nor does a stockpile include materials dumped at the place of incorporation, or adjacent to the location and coordinated with the incorporation.

(5) The applicable prevailing wage rate shall be determined by the locality in which the work is performed. Workers subject to subsection (2)(d) of this section, who produce such materials at an off-site facility shall be paid the applicable prevailing wage rates for the county in which the off-site facility is located. Workers subject to subsection (2) of this section, who deliver such materials to a public works project site shall be paid the applicable prevailing wage rates for the county in which the public works project is located.

[Statutory Authority: Chapter 39.12 RCW, RCW 43.22.051 and 43.22.270. 08-24-101, § 296-127-018, filed 12/2/08, effective 1/2/09. Statutory Authority: Chapters 39.04 and 39.12 RCW and RCW 43.22.270. 92-01-104 and 92-08-101, § 296-127-018, filed 12/18/91 and 4/1/92, effective 8/31/92.]

****

Overtime Codes

Overtime calculations are based on the hourly rate actually paid to the worker. On public works projects, the hourly rate must be not less than the prevailing rate of wage minus the hourly rate of the cost of fringe benefits actually provided for the worker.

1. ALL HOURS WORKED IN EXCESS OF EIGHT (8) HOURS PER DAY OR FORTY (40) HOURS PER WEEK SHALL BE PAID AT ONE AND ONE-HALF TIMES THE HOURLY RATE OF WAGE.

B. All hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

C. The first two (2) hours after eight (8) regular hours Monday through Friday and the first ten (10) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. All other overtime hours and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

D. The first two (2) hours before or after a five-eight (8) hour workweek day or a four-ten (10) hour workweek day and the first eight (8) hours worked the next day after either workweek shall be paid at one and one-half times the hourly rate of wage. All additional hours worked and all worked on Sundays and holidays shall be paid at double the hourly rate of wage.

E. The first two (2) hours after eight (8) regular hours Monday through Friday and the first eight (8) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. All other hours worked Monday through Saturday, and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

F. The first two (2) hours after eight (8) regular hours Monday through Friday and the first ten (10) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. All other overtime hours worked, except Labor Day, shall be paid at double the hourly rate of wage. All hours worked on Labor Day shall be paid at three times the hourly rate of wage.

G. The first ten (10) hours worked on Saturdays and the first ten (10) hours worked on a fifth calendar weekday in a four-ten hour schedule, shall be paid at one and one-half times the hourly rate of wage. All hours worked in excess of ten (10) hours per day Monday through Saturday and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

H. All hours worked on Saturdays (except makeup days if work is lost due to inclement weather conditions or equipment breakdown) shall be paid at one and one-half times the hourly rate of wage. All hours worked Monday through Saturday over twelve (12) hours and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

I. All hours worked on Sundays and holidays shall also be paid at double the hourly rate of wage.

J. The first two (2) hours after eight (8) regular hours Monday through Friday and the first ten (10) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. All hours worked over ten (10) hours Monday through Saturday, Sundays and holidays shall be paid at double the hourly rate of wage.

K. All hours worked on Saturdays and Sundays shall be paid at one and one-half times the hourly rate of wage. All hours worked on holidays shall be paid at double the hourly rate of wage.

M. All hours worked on Saturdays (except makeup days if work is lost due to inclement weather conditions) shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

Overtime Codes Continued

1. N. All hours worked on Saturdays (except makeup days) shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

   O. The first ten (10) hours worked on Saturday shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sundays, holidays and after twelve (12) hours, Monday through Friday and after ten (10) hours on Saturday shall be paid at double the hourly rate of wage.

   P. All hours worked on Saturdays (except makeup days if circumstances warrant) and Sundays shall be paid at one and one-half times the hourly rate of wage. All hours worked on holidays shall be paid at double the hourly rate of wage.

   Q. The first two (2) hours after eight (8) regular hours Monday through Friday and up to ten (10) hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. All hours worked in excess of ten (10) hours per day Monday through Saturday and all hours worked on Sundays and holidays (except Christmas day) shall be paid at double the hourly rate of wage. All hours worked on Christmas day shall be paid at two and one-half times the hourly rate of wage.

   R. All hours worked on Sundays and holidays shall be paid at two times the hourly rate of wage.

   U. All hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sundays and holidays (except Labor Day) shall be paid at two times the hourly rate of wage. All hours worked on Labor Day shall be paid at three times the hourly rate of wage.

   V. All hours worked on Sundays and holidays (except Thanksgiving Day and Christmas day) shall be paid at one and one-half times the hourly rate of wage. All hours worked on Thanksgiving Day and Christmas day shall be paid at double the hourly rate of wage.

   X. The first four (4) hours after eight (8) regular hours Monday through Friday and the first twelve (12) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. All hours worked over twelve (12) hours Monday through Saturday, Sundays and holidays shall be paid at double the hourly rate of wage. When holiday falls on Saturday or Sunday, the day before Saturday, Friday, and the day after Sunday, Monday, shall be considered the holiday and all work performed shall be paid at double the hourly rate of wage.

   Y. All hours worked outside the hours of 5:00 am and 5:00 pm (or such other hours as may be agreed upon by any employer and the employee) and all hours worked in excess of eight (8) hours per day (10 hours per day for a 4 x 10 workweek) and on Saturdays and holidays (except labor day) shall be paid at one and one-half times the hourly rate of wage. (except for employees who are absent from work without prior approval on a scheduled workday during the workweek shall be paid at the straight-time rate until they have worked 8 hours in a day (10 in a 4 x 10 workweek) or 40 hours during that workweek.) All hours worked Monday through Saturday over twelve (12) hours and all hours worked on Sundays and Labor Day shall be paid at double the hourly rate of wage.

   Z. All hours worked on Saturdays and Sundays shall be paid at one and one-half times the hourly rate of wage. All hours worked on holidays shall be paid the straight time rate of pay in addition to holiday pay.

Overtime Codes Continued

2. ALL HOURS WORKED IN EXCESS OF EIGHT (8) HOURS PER DAY OR FORTY (40) HOURS PER WEEK SHALL BE PAID AT ONE AND ONE-HALF TIMES THE HOURLY RATE OF WAGE.

   B. All hours worked on holidays shall be paid at one and one-half times the hourly rate of wage.

   F. The first eight (8) hours worked on holidays shall be paid at the straight hourly rate of wage in addition to the holiday pay. All hours worked in excess of eight (8) hours on holidays shall be paid at double the hourly rate of wage.

   M. This code appears to be missing. All hours worked on Saturdays, Sundays and holidays shall be paid at double the hourly rate of wage.

   R. All hours worked on Sundays and holidays and all hours worked over sixty (60) in one week shall be paid at double the hourly rate of wage.

   U. All hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. All hours worked over 12 hours in a day or on Sundays and holidays shall be paid at double the hourly rate of wage.

3. ALL HOURS WORKED IN EXCESS OF EIGHT (8) HOURS PER DAY OR FORTY (40) HOURS PER WEEK SHALL BE PAID AT ONE AND ONE-HALF TIMES THE HOURLY RATE OF WAGE.

   F. All hours worked on Saturday shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sunday shall be paid at two times the hourly rate of wage. All hours worked on paid holidays shall be paid at two and one-half times the hourly rate of wage including holiday pay.

   H. All work performed on Sundays between March 16th and October 14th and all Holidays shall be compensated for at two (2) times the regular rate of pay. Work performed on Sundays between October 15th and March 15th shall be compensated at one and one half (1-1/2) times the regular rate of pay.

   J. All hours worked between the hours of 10:00 pm and 5:00 am, Monday through Friday, and all hours worked on Saturdays shall be paid at a one and one-half times the hourly rate of wage. All hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

   K. Work performed in excess of eight (8) hours of straight time per day, or ten (10) hours of straight time per day when four ten (10) hour shifts are established, or forty (40) hours of straight time per week, Monday through Friday, or outside the normal 5 am to 6pm shift, and all work on Saturdays shall be paid at one and one-half times the hourly rate of wage. All work performed after 6:00 pm Saturday to 5:00 am Monday and Holidays, and all hours worked in excess of twelve (12) hours in a single shift shall be paid at double the hourly rate of wage.

   After an employee has worked eight (8) hours at an applicable overtime rate, all additional hours shall be at the applicable overtime rate until such time as the employee has had a break of eight (8) hours or more. When an employee returns to work without at least eight (8) hours time off since their previous shift, all such time shall be a continuation of shift and paid at the applicable overtime rate until he/she shall have the eight (8) hours rest period.

Overtime Codes Continued

4. ALL HOURS WORKED IN EXCESS OF EIGHT (8) HOURS PER DAY OR FORTY (40) HOURS PER WEEK SHALL BE PAID AT ONE AND ONE-HALF TIMES THE HOURLY RATE OF WAGE.

A. All hours worked in excess of eight (8) hours per day or forty (40) hours per week shall be paid at double the hourly rate of wage. All hours worked on Saturdays, Sundays and holidays shall be paid at double the hourly rate of wage

C. On Monday through Friday, the first four (4) hours of overtime after eight (8) hours of straight time work shall be paid at one and one half (1-1/2) times the straight time rate of pay, unless a four (4) day ten (10) hour workweek has been established. On a four (4) day ten (10) hour workweek scheduled Monday through Thursday, or Tuesday through Friday, the first two (2) hours of overtime after ten (10) hours of straight time work shall be paid at one and one half (1-1/2) times the straight time rate of pay. On Saturday, the first twelve (12) hours of work shall be paid at one and one half (1-1/2) times the straight time rate of pay, except that if the job is down on Monday through Friday due to weather conditions or other conditions outside the control of the employer, the first ten (10) hours on Saturday may be worked at the straight time rate of pay. All hours worked over twelve (12) hours in a day and all hours worked on Sunday and Holidays shall be paid at two (2) times the straight time rate of pay.

D. All hours worked in excess of eight (8) hours per day or forty (40) hours per week shall be paid at double the hourly rate of wage. All hours worked on Saturday, Sundays and holidays shall be paid at double the hourly rate of pay. Rates include all members of the assigned crew.

EXCEPTION:
On all multipole structures and steel transmission lines, switching stations, regulating, capacitor stations, generating plants, industrial plants, associated installations and substations, except those substations whose primary function is to feed a distribution system, will be paid overtime under the following rates:

The first two (2) hours after eight (8) regular hours Monday through Friday of overtime on a regular workday, shall be paid at one and one-half times the hourly rate of wage. All hours in excess of ten (10) hours will be at two (2) times the hourly rate of wage. The first eight (8) hours worked on Saturday will be paid at one and one-half (1-1/2) times the hourly rate of wage. All hours worked in excess of eight (8) hours on Saturday, and all hours worked on Sundays and holidays will be at the double the hourly rate of wage.

All overtime eligible hours performed on the above described work that is energized, shall be paid at the double the hourly rate of wage.

E. The first two (2) hours after eight (8) regular hours Monday through Friday and the first eight (8) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. All other hours worked Monday through Saturday, and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

On a four-day, ten-hour weekly schedule, either Monday thru Thursday or Tuesday thru Friday schedule, all hours worked after ten shall be paid at double the hourly rate of wage. The Monday or Friday not utilized in the normal four-day, ten hour work week, and Saturday shall be paid at one and one half (1½) times the regular shift rate for the first eight (8) hours. All other hours worked Monday through Saturday, and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

G. All hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. All hours worked Monday through Saturday over twelve (12) hours and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

I. The First eight (8) hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. All hours worked in excess of eight (8) per day on Saturdays shall be paid at double the hourly rate of wage. All hours

worked on Sundays and holidays shall be paid at double the hourly rate of wage.

Overtime Codes Continued

4. J. The first eight (8) hours worked on a Saturday shall be paid at one and one-half times the hourly rate of wage. All hours worked in excess of eight (8) hours on a Saturday shall be paid at double the hourly rate of wage. All hours worked over twelve (12) in a day, and all hours worked on Sundays and Holidays shall be paid at double the hourly rate of wage.

K. All hours worked on a Saturday shall be paid at one and one-half times the hourly rate of wage, so long as Saturday is the sixth consecutive day worked. All hours worked over twelve (12) in a day Monday through Saturday, and all hours worked on Sundays and Holidays shall be paid at double the hourly rate of wage.

L. The first twelve (12) hours worked on a Saturday shall be paid at one and one-half times the hourly rate of wage. All hours worked on a Saturday in excess of twelve (12) hours shall be paid at double the hourly rate of pay. All hours worked over twelve (12) in a day Monday through Friday, and all hours worked on Sundays shall be paid at double the hourly rate of wage. All hours worked on a holiday shall be paid at one and one-half times the hourly rate of wage, except that all hours worked on Labor Day shall be paid at double the hourly rate of pay.

S. On a four (4) day ten (10) hour workweek scheduled Monday through Thursday, or Tuesday through Friday, work performed in excess of (10) hours shall be paid at one and one half (1-1/2) times the hourly rate of pay. On Monday through Friday, work performed outside the normal work hours of 6:00 a.m. and 6:00 p.m. shall be paid at one and one-half (1-1/2) times the straight time rate, (except for special shifts or multiple shift operations).

All hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. All work performed on Sundays and holidays shall be paid at double the hourly rate of wage. When an employee returns to work without at least eight (8) hours time off since their previous shift, all such time shall be a continuation of shift and paid at the applicable overtime rate until such time as the employee has had a break of eight (8) hours.

Multiple Shift Operations: When the first shift of a multiple shift (a two or three shift) operation is started at the basic straight time rate or at a specific overtime rate, all shifts of that day's operation shall be completed at that rate. Special Shifts: The Special Shift Premium is the basic hourly rate of pay plus $2.00 an hour. When due to conditions beyond the control of the employer or when an owner (not acting as the contractor), a government agency or the contract specifications require more than four (4) hours of a special shift can only be performed outside the normal 6am to 6pm shift then the special shift premium will be applied to the basic straight time for the entire shift. When an employee works on a special shift, they shall be paid the special shift premium for each hour worked unless they are in overtime or double-time status. (For example, the special shift premium does not waive the overtime requirements for work performed on Saturday or Sunday).

U. The first four (4) hours after eight (8) regular hours Monday through Friday and the first twelve (12) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. (Except on makeup days if work is lost due to inclement weather, then the first eight (8) hours on Saturday may be paid the regular rate.) All hours worked over twelve (12) hours Monday through Saturday, and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

Overtime Codes Continued

4. X. All hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sundays and holidays shall be paid at double the hourly rate of wage. Work performed outside the normal shift of 6 am to 6pm shall be paid at one and one-half the straight time rate, (except for special shifts or three shift operations). All work performed on Sundays and holidays shall be paid at double the hourly rate of wage. Shifts may be established when considered necessary by the Employer.

   The Employer may establish shifts consisting of eight (8) or ten (10) hours of work (subject to WAC 296-127-022), that shall constitute a normal forty (40) hour work week. The Employer can change from a 5-eight to a 4-ten hour schedule or back to the other. All hours of work on these shifts shall be paid for at the straight time hourly rate. Work performed in excess of eight hours (or ten hours per day (subject to WAC 296-127-022) shall be paid at one and one-half the straight time rate.

   When due to conditions beyond the control of the Employer, or when contract specifications require that work can only be performed outside the regular day shift, then by mutual agreement a special shift may be worked at the straight time rate, eight (8) hours work for eight (8) hours pay. The starting time shall be arranged to fit such conditions of work.

   When an employee returns to work without at a break of eight (8) hours since their previous shift, all such time shall be a continuation of shift and paid at the applicable overtime rate until such time as the employee has had a break of eight (8) hours.

Overtime Codes Continued

11. ALL HOURS WORKED IN EXCESS OF EIGHT (8) HOURS PER DAY OR FORTY (40) HOURS PER WEEK SHALL BE PAID AT ONE AND ONE-HALF TIMES THE HOURLY RATE OF WAGE.

   B After an employee has worked eight (8) hours, all additional hours worked shall be paid at the applicable overtime rate until such time as the employee has had a break of eight (8) hours or more.

   C The first two (2) hours after eight (8) regular hours Monday through Friday and the first eight (8) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. All other overtime hours worked, except Labor Day, and all hours on Sunday shall be paid at double the hourly rate of wage. All hours worked on Labor Day shall be paid at three times the hourly rate of wage. All non-overtime and non-holiday hours worked between 4:00 pm and 5:00 am, Monday through Friday, shall be paid at a premium rate of 15% over the hourly rate of wage.

   D. All hours worked on Saturdays and holidays shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sundays shall be paid at double the hourly rate of wage.

   After an employee has worked eight (8) hours, all additional hours worked shall be paid at the applicable overtime rate until such time as the employee has had a break of eight (8) hours or more.

   E. The first two (2) hours after eight (8) regular hours Monday through Friday, the first ten (10) hours on Saturday, and the first ten (10) hours worked on Holidays shall be paid at one and one-half times the hourly rate of wage. All hours worked over ten (10) hours Monday through Saturday, and Sundays shall be paid at double the hourly rate of wage.

   After an employee has worked eight (8) hours, all additional hours worked shall be paid at the applicable overtime rate until such time as the employee has had a break of eight (8) hours or more.

Overtime Codes Continued

11. F. The first two (2) hours after eight (8) regular hours Monday through Friday and the first eight (8) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. All other hours worked Monday through Saturday, and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

On a four-day, ten-hour weekly schedule, either Monday thru Thursday or Tuesday thru Friday schedule, all hours worked after ten shall be paid at double the hourly rate of wage. The Monday or Friday not utilized in the normal four-day, ten hour work week, and Saturday shall be paid at one-half times the hourly rate of wage for the first eight (8) hours. All other hours worked Monday through Saturday, and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

G. Work performed in excess of eight (8) hours of straight time per day, or ten (10) hours of straight time per day when four ten (10) hour shifts are established, or forty (40) hours of straight time per week, Monday through Friday, or outside the normal 5 am to 6pm shift, and all work on Saturdays shall be paid at one and one-half times the hourly rate of wage.

All work performed after 6:00 pm Saturday to 5:00 am Monday and Holidays, and all hours worked in excess of twelve (12) hours in a single shift shall be paid at double the hourly rate of wage.

After an employee has worked eight (8) hours at an applicable overtime rate, all additional hours shall be at the applicable overtime rate until such time as the employee has had a break of nine (9) hours or more. When an employee returns to work without at least nine (9) hours time off since their previous shift, all such time shall be a continuation of shift and paid at the applicable overtime rate until he/she shall have the nine (9) hours rest period.

H. Work performed in excess of eight (8) hours of straight time per day, or ten (10) hours of straight time per day when four ten (10) hour shifts are established, or forty (40) hours of straight time per week, Monday through Friday, or outside the normal 5 am to 6pm shift, and all work on Saturdays shall be paid at one and one-half times the hourly rate of wage.

All work performed after 6:00 pm Saturday to 5:00 am Monday and Holidays, and all hours worked in excess of twelve (12) hours in a single shift shall be paid at double the hourly rate of wage.

After an employee has worked eight (8) hours at an applicable overtime rate, all additional hours shall be at the applicable overtime rate until such time as the employee has had a break of ten (10) hours or more. When an employee returns to work without at least ten (10) hours time off since their previous shift, all such time shall be a continuation of shift and paid at the applicable overtime rate until he/she shall have the ten (10) hours rest period.

J. All hours worked on holidays shall be paid at double the hourly rate of wage.

K. On Monday through Friday hours worked outside 4:00 am and 5:00 pm, and the first two (2) hours after eight (8) hours worked shall be paid at one and one-half times the hourly rate. All hours worked over 10 hours per day Monday through Friday, and all hours worked on Saturdays, Sundays, and Holidays worked shall be paid at double the hourly rate of wage.

L. An employee working outside 5:00 am and 5:00 pm shall receive an additional two dollar ($2.00) per hour for all hours worked that shift. All hours worked on holidays shall be paid at one and one-half times the hourly rate of wage. All hours worked on holidays shall be paid at one and one-half times the hourly rate of wage.

Overtime Codes Continued

11. M. On Monday through Friday, the first four (4) hours of overtime after eight (8) hours of straight time work shall be paid at one and one half (1-1/2) times the straight time rate of pay, unless a four (4) day ten (10) hour workweek has been established. On a four (4) day ten (10) hour workweek scheduled Monday through Thursday, or Tuesday through Friday, the first two (2) hours of overtime after ten (10) hours of straight time work shall be paid at one and one half (1-1/2) times the straight time rate of pay.

Work performed outside the normal work hours of 5:00 a.m. and 6:00 p.m. shall be paid at one and one-half (1-1/2) times the straight time rate, (except for special shifts or multiple shift operations). When the first shift of a multiple shift (a two or three shift) operation is started at the basic straight time rate or at a specific overtime rate, all shifts of that day's operation shall be completed at that rate. When due to conditions beyond the control of the Employer or when contract specifications require that work can only be performed outside the regular day shift of 5:00 am to 6:00 pm, then a special shift may be worked at the straight time rate, plus the shift pay premium when applicable. The starting time of work will be arranged to fit such conditions of work. Such shift shall consist of eight (8) hours work for eight (8) hours pay or ten (10) hours work for ten (10) hours pay for four ten shifts.

On Saturday, the first twelve (12) hours of work shall be paid at one and one half (1-1/2) times the straight time rate of pay. All work performed after 6:00 pm Saturday to 5:00 am Monday, all work performed over twelve (12) hours, and all work performed on holidays shall be paid at double the straight time rate of pay.

Shift Pay Premium: In an addition to any overtime already required, all hours worked between the hours of 6:00 pm and 5:00 am shall receive an additional two dollars ($2.00) per hour.

N. All work performed over twelve hours in a shift and all work performed on Sundays and Holidays shall be paid at double the straight time rate.

Any time worked over eight (8) hours on Saturday shall be paid double the straight time rate, except employees assigned to work six 10-hour shifts per week shall be paid double the straight time rate for any time worked on Saturday over 10 hours.

O. All work performed on Saturdays, Sundays, and Holidays shall be paid at one and one half (1-1/2) times the straight time rate of pay.

Overtime Codes Continued

11. P. Work performed in excess of ten (10) hours of straight time per day when four ten (10) hour shifts are established and all work on Saturdays, except for make-up days shall be paid at time and one-half (1 ½) the straight time rate.

Work performed outside the normal work hours of 5:00 a.m. and 6:00 p.m. shall be paid at one and one-half (1-1/2) times the straight time rate, (except for special shifts or multiple shift operations). When the first shift of multiple shift (a two or three shift) operation is started at the basic straight time rate or at a specific overtime rate, all shifts of that day's operation shall be completed at that rate. When due to conditions beyond the control of the Employer or when contract specifications require that work can only be performed outside the regular day shift of 5:00 a.m. to 6:00 p.m., then a special shift may be worked at the straight time rate, plus the shift pay premium when applicable. The starting time of work will be arranged to fit such conditions of work. Such shifts shall consist of eight (8) hours work for eight (8) hours pay or ten (10) hours work for ten (10) hours pay for four ten-hour shifts.

In the event the job is down due to weather conditions, then Saturday may, be worked as a voluntary make-up day at the straight time rate. However, Saturday shall not be utilized as a make-up day when a holiday falls on Friday. All work performed on Sundays and holidays and work in excess of twelve (12) hours per day shall be paid at double (2x) the straight time rate of pay.

After an employee has worked eight (8) hours at an applicable overtime rate, all additional hours shall be at the applicable overtime rate until such time as the employee has had a break of eight (8) hours.

When an employee returns to work without a break of eight (8) hours since their previous shift, all such time shall be a continuation of shift and paid at the applicable overtime rate until such time as the employee has had a break of eight (8) hours.

Q. All hours worked between the hours of 6:00 pm and 6:00 am, Monday through Saturday, shall be paid at a premium rate of 35% over the hourly rate of wage. Work performed on Sundays shall be paid at double time. All hours worked on holidays shall be paid at double the hourly rate of wage.

R On Monday through Saturday hours worked outside 6:00 am and 7:00 pm, and all hours after eight (8) hours worked shall be paid at one and one-half times the hourly rate. All hours worked on Sundays and Holidays shall be paid at double the hourly rate of wage.

When a holiday falls on a Saturday, the Friday before shall be the observed holiday. When a holiday falls on a Sunday, the following Monday shall be the observed holiday.

S. The first ten (10) hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. In the event the job is down due to weather conditions, or other conditions beyond the control of the Employer, then Saturday may be worked at the straight time rate, for the first eight (8) hours, or the first ten (10) hours when a four day ten hour workweek has been established.

All hours worked Monday through Saturday over twelve (12) hours and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

When an employee returns to work without a break of eight (8) hours since their previous shift, all such time shall be a continuation of shift and paid at the applicable overtime rate until such time as the employee has had a break of eight (8) hours.

Overtime Codes Continued

11. T. On Monday through Friday, the first four (4) hours of overtime after eight (8) hours of straight time work shall be paid at one and one half (1-1/2) times the straight time rate of pay, unless a four (4) day ten (10) hour workweek has been established. On a four (4) day ten (10) hour workweek scheduled Monday through Thursday, or Tuesday through Friday, the first two (2) hours of overtime after ten (10) hours of straight time work shall be paid at one and one half (1-1/2) times the straight time rate of pay.

On Saturday, the first twelve (12) hours of work shall be paid at one and one half (1-1/2) times the straight time rate of pay, except that if the job is down on Monday through Friday due to weather conditions or other conditions outside the control of the employer, the first ten (10) hours on Saturday may be worked at the straight time rate of pay.

All hours worked over twelve (12) hours in a day and all hours worked on Sunday and Holidays shall be paid at two (2) times the straight time rate of pay.

U. On Monday through Friday, the first four (4) hours of overtime after eight (8) hours of straight time work shall be paid at one and one half (1-1/2) times the straight time rate of pay, unless a four (4) day ten (10) hour workweek has been established. On a four (4) day ten (10) hour workweek scheduled Monday through Thursday, or Tuesday through Friday, the first two (2) hours of overtime after ten (10) hours of straight time work shall be paid at one and one half (1-1/2) times the straight time rate of pay.

On Saturday, the first twelve (12) hours of work shall be paid at one and one half (1-1/2) times the straight time rate of pay, except that if the job is down on Monday through Friday due to weather conditions or other conditions outside the control of the employer, the first ten (10) hours on Saturday may be worked at the straight time rate of pay.

All hours worked over twelve (12) hours in a day and all hours worked on Sunday and Holidays shall be paid at two (2) times the straight time rate of pay.

If, due to conditions beyond the control of the Employer or when contract specifications require that work can only be performed outside the regular day shift, then a Special Shift may be worked, Monday through Friday, at the straight-time rate. The starting time of work for the Special Shift will be arranged to fit such conditions of work. Such Special Shift shall consist of eight (8) hours of work for eight (8) hours of pay or ten (10) hours of work for ten(10) hours of pay on a four-ten workday schedule.

V. All hours worked on Saturdays and Sundays (except make-up days due to conditions beyond the control of the employer) shall be paid at one and one-half times the hourly rate of wage. All hours worked on holidays shall be paid at double the hourly rate of wage.

W. Work performed in excess of eight (8) hours of straight time per day, or ten (10) hours of straight time per day when four ten (10) hour shifts are established, or forty (40) hours of straight time per week, Monday through Friday, or outside the normal 6 am to 6pm shift, and all work on Saturdays shall be paid at one and one-half times the hourly rate of wage. All work performed on Sundays and Holidays shall be paid at double the hourly rate of wage.

After an employee has worked eight (8) hours at an applicable overtime rate, all additional hours shall be at the applicable overtime rate until such time as the employee has had a break of eight (8) hours or more.

When an employee returns to work without at least eight (8) hours time off since their previous shift, all such time shall be a continuation of shift and paid at the applicable overtime rate until he/she shall have the eight (8) hours rest period.

X. Overtime Calculations are based on the hourly rate actually paid to the worker. On public works projects, the hourly rate must be not less than the prevailing rate of wage minus the hourly rate of the cost of fringe benefits actually provided for the worker.

ALL HOURS WORKED IN EXCESS OF EIGHT (8) HOURS PER DAY OR FORTY (40) HOURS PER WEEK SHALL BE PAID AT ONE AND ONE-HALF TIMES THE HOURLY RATE OF WAGE.

Work performed in excess of ten (10) hours of straight time per day when four ten (10) hour shifts are established and all work on Saturdays, except for make-up days shall be paid at time and one-half (1 ½) the straight time rate.

Work performed outside the normal work hours of 5:00 a.m. and 6:00 p.m. shall be paid at one and one-half (1-1/2) times the straight time rate, (except for special shifts or multiple shift operations). When the first shift of multiple shift (a two or three shift) operation is started at the basic straight time rate or at a specific overtime rate, all shifts of that day's operation shall be completed at that rate. When due to conditions beyond the control of the Employer or when contract specifications require that work can only be performed outside the regular day shift of 5:00 a.m. to 6:00 p.m., then a special shift may be worked at the straight time rate, plus the shift pay premium when applicable. The starting time of work will be arranged to fit such conditions of work. Such shifts shall consist of eight (8) hours work for eight (8) hours pay or ten (10) hours work for ten (10) hours pay for four ten-hour shifts.

In the event the job is down due to weather conditions, then Saturday may, be worked as a voluntary make-up day at the straight time rate. However, Saturday shall not be utilized as a make-up day when a holiday falls on Friday. All work performed on Sundays and holidays and work in excess of twelve (12) hours per day shall be paid at double (2x) the straight time rate of pay.

After an employee has worked eight (8) hours at an applicable overtime rate, all additional hours shall be at the applicable overtime rate until such time as the employee has had a break of eight (8) hours.

When an employee returns to work without a break of eight (8) hours since their previous shift, all such time shall be a continuation of shift and paid at the applicable overtime rate until such time as the employee has had a break of eight (8) hours.

Special Shifts: When due to conditions beyond the control of the Employer or when contract specifications require that work can only be performed outside the regular day shift, then a special shift may be worked at the straight time rate. The starting time of work will be arranged to fit such conditions of work. Such shift shall consist of eight (8) hours work for eight (8) hours pay or ten (10) hours work for ten (10) hours pay for four ten- hour shifts.

Y. **Overtime calculations** are based on the hourly rate actually paid to the worker. On public works projects, the hourly rate must be not less than the prevailing rate of wage minus the hourly rate of the cost of fringe benefits actually provided for the worker.

ALL HOURS WORKED IN EXCESS OF EIGHT (8) HOURS PER DAY OR FORTY (40) HOURS PER WEEK SHALL BE PAID AT ONE AND ONE-HALF TIMES THE HOURLY RATE OF WAGE.

All hours worked on Saturdays (except makeup days if work is lost due to inclement weather conditions) shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

When due to conditions beyond the control of the Employer or when contract specifications require that work can only be performed outside the regular day shift, then a special shift may be worked at the straight time rate. The starting time of work will be arranged to fit such conditions of work. Such shift shall consist of eight (8) hours work for eight (8) hours pay.

Special Shift Premium for Prevailed work in Washington is basic hourly rate plus $2.00 per hour. When conditions

beyond the control of the Employer or when an owner (not acting as the contractor), a government agency or the contract specifications requires that more than four (4) hours of the special shift can only be performed outside the normal 6 a.m. – 6 p.m. shift, then the special shift premium will be applied to the basic straight time for the entire shift. When an Employee works on a special shift, they shall be paid the special shift premium for each hour worked unless they are in overtime or double-time status. Shift premium will only apply on the second shift of a two-shift operation when the language above is met.

Z. **Overtime calculations** are based on the hourly rate actually paid to the worker. On public works projects, the hourly rate must be not less than the prevailing rate of wage minus the hourly rate of the cost of fringe benefits actually provided for the worker.

ALL HOURS WORKED IN EXCESS OF EIGHT (8) HOURS PER DAY OR FORTY (40) HOURS PER WEEK SHALL BE PAID AT ONE AND ONE-HALF TIMES THE HOURLY RATE OF WAGE.

All hours worked on Saturdays (except makeup days if work is lost due to inclement weather conditions) shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

SPECIAL SHIFT: A special shift may be established at any time, at the option of the Employer, on any job or project.

Holiday Codes

5. A. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday after Thanksgiving Day, and Christmas Day (7).

B. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday after Thanksgiving Day, the day before Christmas, and Christmas Day (8).

C. Holidays: New Year's Day, Presidents' Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, And Christmas Day (8).

D. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday and Saturday after Thanksgiving Day, And Christmas Day (8).

H. Holidays: New Year's Day, Memorial Day, Independence Day, Thanksgiving Day, the Day after Thanksgiving Day, And Christmas (6).

I. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, and Christmas Day (6).

K. Holidays: New Year's Day, Presidents' Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday After Thanksgiving Day, The Day Before Christmas, And Christmas Day (9).

L. Holidays: New Year's Day, Martin Luther King Jr. Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday after Thanksgiving Day, And Christmas Day (8).

N. Holidays: New Year's Day, Presidents' Day, Memorial Day, Independence Day, Labor Day, Veterans' Day, Thanksgiving Day, The Friday After Thanksgiving Day, And Christmas Day (9).

P. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday And Saturday After Thanksgiving Day, The Day Before Christmas, And Christmas Day (9). If A Holiday Falls On Sunday, The Following Monday Shall Be Considered As A Holiday.

Q. Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, and Christmas Day (6).

R. Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Day After Thanksgiving Day, One-Half Day Before Christmas Day, And Christmas Day. (7 1/2).

S. Paid Holidays: New Year's Day, Presidents' Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, And Christmas Day (7).

Z. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Veterans Day, Thanksgiving Day, the Friday after Thanksgiving Day, And Christmas Day (8).

Holiday Codes Continued

6. G. Paid Holidays: New Year's Day, Martin Luther King Jr. Day, Presidents' Day, Memorial Day, Independence Day, Labor Day, Veterans' Day, Thanksgiving Day, the Friday after Thanksgiving Day, Christmas Day, and Christmas Eve Day (11).

H. Paid Holidays: New Year's Day, New Year's Eve Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday After Thanksgiving Day, Christmas Day, The Day After Christmas, And A Floating Holiday (10).

T. Paid Holidays: New Year's Day, Presidents' Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, The Friday After Thanksgiving Day, The Last Working Day Before Christmas Day, And Christmas Day (9).

Z. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday after Thanksgiving Day, And Christmas Day (7). If a holiday falls on Saturday, the preceding Friday shall be considered as the holiday. If a holiday falls on Sunday, the following Monday shall be considered as the holiday.

Holiday Codes Continued

7. A. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday and Saturday after Thanksgiving Day, And Christmas Day (8). Any Holiday Which Falls On A Sunday Shall Be Observed As A Holiday On The Following Monday. If any of the listed holidays falls on a Saturday, the preceding Friday shall be a regular work day.

B. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday and Saturday after Thanksgiving Day, And Christmas Day (8). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.

C. Holidays: New Year's Day, Martin Luther King Jr. Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, And Christmas Day (8). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.

D. Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Veteran's Day, Thanksgiving Day, the Friday after Thanksgiving Day, And Christmas Day (8). Unpaid Holidays: President's Day. Any paid holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any paid holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.

E. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, And Christmas Day (7). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.

F. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, the last working day before Christmas day and Christmas day (8). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.

Holiday Codes Continued

7. G. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, and Christmas Day (6). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday.

H. Holidays: New Year's Day, Martin Luther King Jr. Day, Independence Day, Memorial Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, the Last Working Day before Christmas Day and Christmas Day (9). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.

I. Holidays: New Year's Day, President's Day, Independence Day, Memorial Day, Labor Day, Thanksgiving Day, The Friday After Thanksgiving Day, The Day Before Christmas Day And Christmas Day (9). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.

J. Holidays: New Year's Day, Independence Day, Memorial Day, Labor Day, Thanksgiving Day and Christmas Day (6). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.

K. Holidays: New Year's Day, Memorial Day, Independence Day, Thanksgiving Day, the Friday and Saturday after Thanksgiving Day, And Christmas Day (8). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.

L. Holidays: New Year's Day, Memorial Day, Labor Day, Independence Day, Thanksgiving Day, the Last Work Day before Christmas Day, And Christmas Day (7). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.

N. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, And Christmas Day (7). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. When Christmas falls on a Saturday, the preceding Friday shall be observed as a holiday.

P. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday after Thanksgiving Day, And Christmas Day (7). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday.

Q. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, the Last Working Day before Christmas Day and Christmas Day (8). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. If any of the listed holidays falls on a Saturday, the preceding Friday shall be a regular work day.

S. Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday after Thanksgiving Day, Christmas Day, the Day after Christmas, and A Floating Holiday (9). If any of the listed holidays falls on a Sunday, the day observed by the Nation shall be considered a holiday and compensated accordingly.

V. Holidays: New Year's Day, President's Birthday, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, Christmas Day, the day before or after Christmas, and the day before or after New Year's Day. If any of the above listed holidays falls on a Sunday, the day observed by the Nation shall be considered a holiday and compensated accordingly.

W. Holidays: New Year's Day, Day After New Year's, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, Christmas Eve Day, Christmas Day, the day after Christmas, the day before New Year's Day, and a Floating Holiday.

Holiday Codes Continued

7. X. Holidays: New Year's Day, Day before or after New Year's Day, Presidents' Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, Christmas Day, and the day before or after Christmas day. If a holiday falls on a Saturday or on a Friday that is the normal day off, then the holiday will be taken on the last normal workday. If the holiday falls on a Monday that is the normal day off or on a Sunday, then the holiday will be taken on the next normal workday.

Y. Holidays: New Year's Day, Presidents' Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, and Christmas Day. (8) If the holiday falls on a Sunday, then the day observed by the federal government shall be considered a holiday and compensated accordingly.

Z. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday and Saturday after Thanksgiving Day, Christmas Eve, and Christmas Day (9). Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday. Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday.

Holiday Codes Continued

15. G. New Year's Day, Washington's Birthday, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, The Friday After Thanksgiving Day, the last scheduled workday before Christmas, and Christmas Day (9). If any of the listed holidays falls on a Sunday, the day observed by the Nation shall be considered a holiday and compensated accordingly.

H. Holidays: New Year's Day, Martin Luther King Jr. Day, Independence Day, Memorial Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, the Last Working Day before Christmas Day and Christmas Day (9). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.

I. Holidays: New Year's Day, President's Day, Independence Day, Memorial Day, Labor Day, Thanksgiving Day, The Friday After Thanksgiving Day, The Day Before Christmas Day And Christmas Day (9). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be

observed as a holiday on the preceding Friday.

J. Holidays: New Year's Day, Martin Luther King Jr. Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday and Saturday after Thanksgiving Day, and Christmas Day (9). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. If any of the listed holidays falls on a Saturday, the preceding Friday shall be a regular work day.

K. Holidays: New Year's Day, Memorial Day, Independence Day, Thanksgiving Day, the Friday and Saturday after Thanksgiving Day, And Christmas Day (8). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.

L. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Veteran's Day, Thanksgiving Day, the Friday after Thanksgiving Day, and Christmas Day (8). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. If any of the listed holidays falls on a Saturday, the preceding Friday shall be a regular work day.

M. Holidays: New Year's Day, Martin Luther King Jr. Day, Independence Day, Memorial Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, Christmas Eve Day and Christmas Day (9). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. If any of the listed holidays falls on a Saturday, the preceding Friday shall be a regular work day.

Holiday Codes Continued

15. N. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Veteran's Day, Thanksgiving Day, the Friday after Thanksgiving Day, and Christmas Day (8). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday.

O. Holidays: New Year's Day, Martin Luther King Jr. Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday and Saturday after Thanksgiving Day, the day before Christmas day, and Christmas Day (10). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday.

P. Holidays: New Year's Day, Memorial Day, Labor Day, Independence Day, Thanksgiving Day, the Friday after Thanksgiving Day, Christmas Eve Day, And Christmas Day (8). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.

Note Codes

8. D. Workers working with supplied air on hazmat projects receive an additional $1.00 per hour.

L. Workers on hazmat projects receive additional hourly premiums as follows -Level A: $0.75, Level B: $0.50, And Level C: $0.25.

M. Workers on hazmat projects receive additional hourly premiums as follows: Levels A & B: $1.00, Levels C & D: $0.50.

N. Workers on hazmat projects receive additional hourly premiums as follows -Level A: $1.00, Level B: $0.75, Level C: $0.50, And Level D: $0.25.

S. Effective August 31, 2012 – A Traffic Control Supervisor shall be present on the project whenever flagging or spotting or other traffic control labor is being utilized. Flaggers and Spotters shall be posted where shown on approved Traffic Control Plans or where directed by the Engineer. All flaggers and spotters shall possess a current flagging card issued by the State of Washington, Oregon, Montana, or Idaho. This classification is only effective on or after August 31, 2012.

T. Effective August 31, 2012 – A Traffic Control Laborer performs the setup, maintenance and removal of all temporary traffic control devices and construction signs necessary to control vehicular, bicycle, and pedestrian traffic during construction operations. Flaggers and Spotters shall be posted where shown on approved Traffic Control Plans or where directed by the Engineer. All flaggers and spotters shall possess a current flagging card issued by the State of Washington, Oregon, Montana, or Idaho. This classification is only effective on or after August 31, 2012.

U. Workers on hazmat projects receive additional hourly premiums as follows – Class A Suit: $2.00, Class B Suit: $1.50, And Class C Suit: $1.00. Workers performing underground work receive an additional $0.40 per hour for any and all work performed underground, including operating, servicing and repairing of equipment. The premium for underground work shall be paid for the entire shift worked. Workers who work suspended by a rope or cable receive an additional $0.50 per hour. The premium for work suspended shall be paid for the entire shift worked. Workers who do “pioneer” work (break open a cut, build road, etc.) more than one hundred fifty (150) feet above grade elevation receive an additional $0.50 per hour.

Note Codes Continued

8. V. In addition to the hourly wage and fringe benefits, the following depth and enclosure premiums shall be paid. The premiums are to be calculated for the maximum depth and distance into an enclosure that a diver reaches in a day. The premiums are to be paid one time for the day and are not used in calculating overtime pay.

Depth premiums apply to depths of fifty feet or more. Over 50' to 100' - $2.00 per foot for each foot over 50 feet. Over 101' to 150' - $3.00 per foot for each foot over 101 feet. Over 151' to 220' - $4.00 per foot for each foot over 220 feet. Over 221' - $5.00 per foot for each foot over 221 feet.

Enclosure premiums apply when divers enter enclosures (such as pipes or tunnels) where there is no vertical ascent and is measured by the distance travelled from the entrance. 25’ to 300’ - $1.00 per foot from entrance. 300’ to 600’ - $1.50 per foot beginning at 300’. Over 600’ - $2.00 per foot beginning at 600’.

W. Meter Installers work on single phase 120/240V self-contained residential meters. The Lineman/Groundmen rates would apply to meters not fitting this description.

X. Workers on hazmat projects receive additional hourly premiums as follows - Class A Suit: $2.00, Class B Suit: $1.50, Class C Suit: $1.00, and Class D Suit: $0.50. Special Shift Premium: Basic hourly rate plus $2.00 per hour.

When due to conditions beyond the control of the Employer or when an owner (not acting as the contractor), a government agency or the contract specifications requires that work can only be performed outside the normal 5 am to 6pm shift, then the special shift premium will be applied to the basic hourly rate. When an employee works on a special shift, they shall be paid a special shift premium for each hour worked unless they are in OT or Double-time status. (For example, the special shift premium does not waive the overtime requirements for work performed on Saturday or Sunday.)

Y. Tide Work: When employees are called out between the hours of 6:00 p.m. and 6:00 a.m. to work on tide work (work located in the tide plane) all time worked shall be at one and one-half times the hourly rate of pay

Swinging Stage/Boatswains Chair: Employees working on a swinging state or boatswains chair or under conditions that require them to be tied off to allow their hands to be free shall receive seventy-five cents ($0.75) per hour above the classification rate..

Z. Workers working with supplied air on hazmat projects receive an additional $1.00 per hour.

Special Shift Premium: Basic hourly rate plus $2.00 per hour. When due to conditions beyond the control of the Employer or when an owner (not acting as a contractor), a government agency or the contract specifications require that more than (4) hours of a special shift can only be performed outside the normal 6 am to 6pm shift, then the special shift premium will be applied to the basic straight time for the entire shift. When an employee works on a special shift, they will be paid a special shift premium for each hour worked unless they are in overtime or double-time status. (For example, the special shift premium does not waive the overtime requirements for work performed on Saturday or Sunday.)

Note Codes Continued

9. A. Workers working with supplied air on hazmat projects receive an additional $1.00 per hour.

Special Shift Premium: Basic hourly rate plus $2.00 per hour. When due to conditions beyond the control of the Employer or when an owner (not acting as the contractor), a government agency or the contract specifications require that more than four (4) hours of a special shift can only be performed outside the normal 6 am to 6pm shift, then the special shift premium will be applied to the basic straight time for the entire shift. When an employee works on a special shift, they shall be paid a special shift premium for each hour worked unless they are in overtime or double-time status. (For example, the special shift premium does not waive the overtime requirements for work performed on Saturday or Sunday.)

Certified Crane Operator Premium: Crane operators requiring certifications shall be paid $0.50 per hour above their classification rate.

Boom Pay Premium: All cranes including tower shall be paid as follows based on boom length:

(A) – 130’ to 199’ – $0.50 per hour over their classification rate.
(B) – 200’ to 299’ – $0.80 per hour over their classification rate.
(C) – 300’ and over – $1.00 per hour over their classification rate.

B. The highest pressure registered on the gauge for an accumulated time of more than fifteen (15) minutes during the shift shall be used in determining the scale paid.

Tide Work: When employees are called out between the hours of 6:00 p.m. and 6:00 a.m. to work on tide work (work located in the tide plane) all time worked shall be at one and one-half times the hourly rate of pay. Swinging Stage/Boatswains Chair: Employees working on a swinging stage or boatswains chair or under conditions that require them to be tied off to allow their hands to be free shall receive seventy-five cents ($0.75) per hour above the classification rate.

C. Tide Work: When employees are called out between the hours of 6:00 p.m. and 6:00 a.m. to work on tide work (work located in the tide plane) all time worked shall be at one and one-half times the hourly rate of pay. Swinging Stage/Boatswains Chair: Employees working on a swinging stage or boatswains chair or under conditions that require them to be tied off to allow their hands to be free shall receive seventy-five cents ($0.75) per hour above the classification rate.

Effective August 31, 2012 – A Traffic Control Supervisor shall be present on the project whenever flagging or spotting or other traffic control labor is being utilized. A Traffic Control Laborer performs the setup, maintenance and removal of all temporary traffic control devices and construction signs necessary to control vehicular, bicycle, and pedestrian traffic during construction operations. Flaggers and Spotters shall be posted where shown on approved Traffic Control

Plans or where directed by the Engineer. All flaggers and spotters shall possess a current flagging card issued by the State of Washington, Oregon, Montana, or Idaho. These classifications are only effective on or after August 31, 2012.

D. Industrial Painter wages are required for painting within industrial facilities such as treatment plants, pipelines, towers, dams, bridges, power generation facilities and manufacturing facilities such as chemical plants, etc., or anywhere abrasive blasting is necessary to prepare surfaces, or hazardous materials encapsulation is required.

E. Heavy Construction includes construction, repair, alteration or additions to the production, fabrication or manufacturing portions of industrial or manufacturing plants, hydroelectric or nuclear power plants and atomic reactor construction. Workers on hazmat projects receive additional hourly premiums as follows -Level A: $1.00, Level B: $0.75, Level C: $0.50, And Level D: $0.25.

Note Codes Continued

9. F. Industrial Painter wages are required for painting within industrial facilities such as treatment plants, pipelines, towers, dams, power generation facilities and manufacturing facilities such as chemical plants, etc., or anywhere abrasive blasting is necessary to prepare surfaces, or hazardous materials encapsulation is required.

H. One (1) person crew shall consist of a Party Chief. (Total Station or similar one (1) person survey system). Two (2) person survey party shall consist of a least a Party Chief and a Chain Person. Three (3) person survey party shall consist of at least a Party Chief, an Instrument Person, and a Chain Person.

I. In addition to the hourly wage and fringe benefits, the following depth and enclosure premiums shall be paid. The premiums are to be calculated for the maximum depth and distance into an enclosure that a diver reaches in a day. The premiums are to be paid one time for the day and are not used in calculating overtime pay.

Depth premiums apply to depths of fifty feet or more. Over 50' to 100' - $2.00 per foot for each foot over 50 feet. Over 101' to 150' - $3.00 per foot for each foot over 101 feet. Over 151' to 220' - $4.00 per foot for each foot over 220 feet. Over 221' - $5.00 per foot for each foot over 221 feet.

Enclosure premiums apply when divers enter enclosures (such as pipes or tunnels) where there is no vertical ascent and is measured by the distance travelled from the entrance. 25’ to 300’ - $1.00 per foot from entrance. 300’ to 600’ - $1.50 per foot beginning at 300’. Over 600’ - $2.00 per foot beginning at 600’.

Employees may be required to perform any combination of work within the Diving team/crew, (with the exception of dive Supervisor) provided they are paid at the highest rate at which he/she has worked for the shift.

L. Workers on hazmat projects receive additional hourly premiums as follows -Level A: $0.75, Level B: $0.50, And Level C: $0.25.

Tide Work: When employees are called out between the hours of 6:00 p.m. and 6:00 a.m. to work on tide work (work located in the tide plane) all time worked shall be at one and one-half times the hourly rate of pay.

Swinging Stage/Boatswains Chair: Employees working on a swinging stage or boatswains chair or under conditions that require them to be tied off to allow their hands to be free shall receive seventy-five cents ($0.75) per hour above the classification rate.

M. Certified Crane Operator Premium: Crane operators requiring certifications shall be paid $1.50 per hour above their classification rate.

Workers on hazmat projects receive additional hourly premiums as follows - Class A Suit: $2.00, Class B Suit: $1.50, Class C Suit: $1.00, and Class D Suit: $0.50.

Special Shift Premium: Basic hourly rate plus $2.00 per hour. When due to conditions beyond the control of the Employer or when an owner (not acting as the contractor), a government agency or the contract specifications requires that work can only be performed outside the normal 6 am to 6pm shift, then the special shift premium will be applied to the basic hourly rate. When an employee works on a special shift, they shall be paid a special shift premium for each hour worked unless they are in OT or Double-time status. (For example, the special shift premium does not waive the overtime requirements for work performed on Saturday or Sunday.)

N. Tide Work: When employees are called out between the hours of 6:00 p.m. and 6:00 a.m.to work on tide work (work located in the tide plane) all time worked shall be at one and one-half times the hourly rate of pay.

Swinging Stage/Boatswains Chair: Employees working on a swinging state or boatswains chair or under conditions that require them to be tied off to allow their hands to be free shall receive seventy-five cents ($0.75) per hour above the classification rate.

When Laborers are required to work in or with live sanitary sewage, they will receive a premium payoff forty ($40.00) dollars per day above their regular daily classification pay. Further, the employer will pay all necessary inoculations to prevent disease if requested by the employee and as recommended by the Department of Labor and Industries (Industrial Safety and Health Division).

O. Effective August 31, 2012 – A Traffic Control Supervisor shall be present on the project whenever flagging or spotting or other traffic control labor is being utilized. Flaggers and Spotters shall be posted where shown on approved Traffic Control Plans or where directed by the Engineer. All flaggers and spotters shall possess a current flagging card issued by the State of Washington, Oregon, Montana, or Idaho. This classification is only effective on or after August 31, 2012.

Any laborer working in Live Sewers shall receive forty dollars ($40.00) per day in addition to regular pay.

P. Tide Work: When employees are called out between the hours of 6:00 p.m. and 6:00 a.m. to work on tide work (work located in the tide plane) all time worked shall be at one and one-half times the hourly rate of pay. Swinging Stage/Boatswains Chair: Employees working on a swinging stage or boatswains chair or under conditions that require them to be tied off to allow their hands to be free shall receive seventy-five cents ($0.75) per hour above the classification rate.

Effective August 31, 2012 – A Traffic Control Supervisor shall be present on the project whenever flagging or spotting or other traffic control labor is being utilized. A Traffic Control Laborer performs the setup, maintenance and removal of all temporary traffic control devices and construction signs necessary to control vehicular, bicycle, and pedestrian traffic during construction operations. Flaggers and Spotters shall be posted where shown on approved Traffic Control Plans or where directed by the Engineer. All flaggers and spotters shall possess a current flagging card issued by the State of Washington, Oregon, Montana, or Idaho. These classifications are only effective on or after August 31, 2012.

When Laborers are required to work in or with live sanitary sewage, they will receive a premium payoff forty ($40.00) dollars per day above their regular daily classification pay. Further, the employer will pay all necessary inoculations to prevent disease if requested by the employee and as recommended by the Department of Labor and Industries (Industrial Safety and Health Division)

Q. The highest pressure registered on the gauge for an accumulated time of more than fifteen (15) minutes during the shift shall be used in determining the scale paid.

Tide Work: When employees are called out between the hours of 6:00 p.m. and 6:00 a.m. to work on tide work (work located in the tide plane) all time worked shall be at one and one-half times the hourly rate of pay. Swinging Stage/Boatswains Chair: Employees working on a swinging stage or boatswains chair or under conditions that require them to be tied off to allow their hands to be free shall receive seventy-five cents ($0.75) per hour above the classification rate.

When Laborers are required to work in or with live sanitary sewage, they will receive a premium payoff forty ($40.00) dollars per day above their regular daily classification pay. Further, the employer will pay all necessary inoculations to prevent disease if requested by the employee and as recommended by the Department of Labor and Industries (Industrial Safety and Health Division).

INFORMATIONAL COPY

Proposal For Bidding Purposes

For Construction of:

SR 544, MP 7.54 to MP 7.70

NOOKSACK RIVER OVERFLOW CULVERT ER PERMANENT REPAIR

F.A. No. 2C01006-4

Whatcom County

Sealed bids will be received by the Department of Transportation at the State Materials Laboratory (Room A101), 1655 South 2nd Ave SW, Tumwater, Washington 98512, until 11:00:59 AM, or via AASHTOWare Project Bids™ software and BidExpress® until 11:00:59 AM Pacific Time, on the date scheduled for opening bids.

Washington State Department of Transportation

IS YOUR SUBCONTRACTOR LIST INCLUDED???

IF NOT

YOUR BID WILL BE CONSIDERED IRREGULAR

AND WILL BE REJECTED!!!

INFORMATIONAL COPY

SUBMIT THE ENCLOSED PROPOSAL BOND FORM WITH YOUR PROPOSAL.

USE OF OTHER FORMS MAY SUBJECT YOUR BID TO REJECTION.

NOTE: Use of other forms may limit the bond below an amount equal to five percent of the bid total.

INFORMATIONAL COPY

Washington State Department of Transportation

Proposal Bond

INFORMATIONAL COPY

of as principal, and the

a corporation duly organized under the laws of the state of , and authorized to do business in the State of Washington, as surety, are held and firmly bound unto the State of Washington in the full sum of five (5) percent of the total amount of the bid proposal of said principal for the work hereinafter described, for the payment of which, well and truly to be made, we bind our heirs, executors, administrators and assigns, and successors and assigns, firmly by these presents.

The condition of this bond is such, that whereas the principal herein is herewith submitting his or its sealed proposal for the following highway construction, to wit:

said bid and proposal, by reference thereto, being made a part hereof.

NOW, THEREFORE, If the said proposal bid by said principal be accepted, and the contract be awarded to said principal, and if said principal shall duly make and enter into and execute said contract and shall furnish a contract bond as required by the Department of Transportation and RCW 39.08 et seq. then this obligation shall be null and void, otherwise it shall remain and be in full force and effect.

IN TESTIMONY WHEREOF, The principal and surety have caused these presents to be signed and sealed this _____ day of _____, _____.

_____

_____
(Principal)

_____
(Surety)

_____
(Attorney-in-fact)

TO THE SECRETARY OF
TRANSPORTATION
OLYMPIA, WASHINGTON

DATE: 10/12/2026
TIME: 11:31 AM
DOT_RGG600

INFORMATIONAL COPY

ITEM NO.	PLAN QUANTITY	ITEM DESCRIPTION (STANDARD ITEM NUMBER)	PRICE PER UNIT DOLLARS	TOTAL AMOUNT DOLLARS
		PREPARATION		
1	LUMP SUM	MOBILIZATION (0001)	LUMP SUM	.
2	1.06 ACRE	CLEARING AND GRUBBING (0025)	AT PER. ACRE .	.
3	LUMP SUM	REMOVAL OF STRUCTURES AND OBSTRUCTIONS (0050)	LUMP SUM	.
4	ESTIMATED	REMOVING SHAFT OBSTRUCTIONS (0256)	ESTIMATED	$142,000.00
5	LUMP SUM	REMOVING PORTION OF EXISTING STRUCTURE STEEL ARCH CULVERT (0060)	LUMP SUM	.
6	LUMP SUM	REMOVING PORTION OF EXISTING BRIDGE NO. 544/10 (0061)	LUMP SUM	.
7	LUMP SUM	REMOVING EXISTING STRUCTURE STEEL ARCH CULVERT (0070)	LUMP SUM	.
8	35 SQ. YD.	REMOVING CEMENT CONC. SIDEWALK (0100)	AT PER. SQ. YD. .	.
9	840 LIN. FT.	REMOVING PLASTIC LINE (0190)	AT PER. LIN. FT. .	.
		GRADING		
10	LUMP SUM	EARTHWORK ( )	LUMP SUM	.
		DRAINAGE		
11	1 EACH	GRATE INLET TYPE 2 (1054)	AT PER. EACH .	.
12	65 TON	STREAMBED SEDIMENT (1093)	AT PER. TON .	.
13	152 TON	STREAMBED COBBLES 8 IN. (0902)	AT PER. TON .	.

TO THE SECRETARY OF
TRANSPORTATION
OLYMPIA, WASHINGTON

DATE: 10/12/2026
TIME: 11:31 AM
DOT_RGG600

INFORMATIONAL COPY

ITEM NO.	PLAN QUANTITY	ITEM DESCRIPTION (STANDARD ITEM NUMBER)	PRICE PER UNIT DOLLARS	TOTAL AMOUNT DOLLARS
		DRAINAGE		
14	10 TON	ROCK FOR EROSION AND SCOUR PROTECTION CLASS A (0921)	AT PER. TON ▪	▪
15	1,580 CU. YD.	ROCK FOR EROSION AND SCOUR PROTECTION CLASS C (0926)	AT PER. CU. YD. ▪	▪
16	660 TON	CUSTOM FILTER ROCK ( )	AT PER. TON ▪	▪
17	41 LIN. FT.	DRAIN PIPE 6 IN. DIAM. (1170)	AT PER. LIN. FT. ▪	▪
18	ESTIMATED	FISH EXCLUSION ASSISTANCE (3077)	ESTIMATED	$5,000.00
19	ESTIMATED	FISH BLOCK NET MAINTENANCE (3078)	ESTIMATED	$5,000.00
		STORM SEWER		
20	3 EACH	CATCH BASIN TYPE 1 (3091)	AT PER. EACH ▪	▪
21	2 EACH	CATCH BASIN TYPE T-PVC (3090)	AT PER. EACH ▪	▪
22	155 LIN. FT.	TESTING STORM SEWER PIPE (3151)	AT PER. LIN. FT. ▪	▪
23	222 LIN. FT.	SCHEDULE A STORM SEWER PIPE 12 IN. DIAM. (3541)	AT PER. LIN. FT. ▪	▪
24	100 LIN. FT.	SCHEDULE A STORM SEWER PIPE 18 IN. DIAM. (3542)	AT PER. LIN. FT. ▪	▪
25	1 EACH	DUCKBILL CHECK VALVE 18 IN. DIAM. ( )	AT PER. EACH ▪	▪

INFORMATIONAL COPY

ITEM NO.	PLAN QUANTITY	ITEM DESCRIPTION (STANDARD ITEM NUMBER)	PRICE PER UNIT DOLLARS	TOTAL AMOUNT DOLLARS
		SANITARY SEWER		
26	534 LIN. FT.	TESTING SEWER PIPE (3152)	AT PER. LIN. FT.	
27	309 LIN. FT.	DUCTILE IRON SEWER PIPE 10 IN. DIAM. (3773)	AT PER. LIN. FT.	
28	225 LIN. FT.	HIGH-DENSITY POLYETHYLENE PIPE FOR FORCE MAIN 10 IN. DIAM. ( )	AT PER. LIN. FT.	
29	304 LIN. FT.	DUCTILE IRON CASING PIPE FOR FORCE MAIN 20 IN. DIAM. ( )	AT PER. LIN. FT.	
30	LUMP SUM	FUEL TANK RELOCATION ( )	LUMP SUM	
		WATER LINES		
31	3 EACH	GATE VALVE 12 IN. (6165)	AT PER. EACH	
32	252 LIN. FT.	DUCTILE IRON PIPE FOR WATER MAIN 12 IN. DIAM. (3869)	AT PER. LIN. FT.	
33	302 LIN. FT.	PVC PIPE FOR WATER MAIN 12 IN. DIAM. (3937)	AT PER. LIN. FT.	
34	304 LIN. FT.	DUCTILE IRON CASING PIPE FOR WATER MAIN 20 IN. DIAM. ( )	AT PER. LIN. FT.	
		STRUCTURE		
35	LUMP SUM	TEMPORARY BRIDGE PB LINE (4001)	LUMP SUM	
36	LUMP SUM	TEMPORARY BRIDGE TB LINE (4001)	LUMP SUM	
37	LUMP SUM	SHORING OR EXTRA EXCAVATION CL. A NEW BRIDGE (4013)	LUMP SUM	
38	2,692 LIN. FT.	CONSTRUCTING 3.5 FT. DIAM SHAFT ( )	AT PER. LIN. FT.	

INFORMATIONAL COPY

ITEM NO.	PLAN QUANTITY	ITEM DESCRIPTION (STANDARD ITEM NUMBER)	PRICE PER UNIT DOLLARS	TOTAL AMOUNT DOLLARS
		STRUCTURE		
39	388 LIN. FT.	CONSTRUCTING 7 FT. DIAM SHAFT (4088)	AT PER. LIN. FT. ▪	▪
40	96,226 POUND	ST. REINF. BAR FOR BRIDGE (4151)	AT PER. POUND ▪	▪
41	16,680 POUND	ST. REINF. BAR SCOUR CM SHEET PILE WALL COPING (4151)	AT PER. POUND ▪	▪
42	21 EACH	QA SHAFT TEST (4160)	AT PER. EACH ▪	▪
43	78 CU. YD.	CONC. CLASS 4000 FOR SCOUR CM SHEET PILE WALL COPING (4202)	AT PER. CU. YD. ▪	▪
44	270 CU. YD.	CONC. CLASS 4000 FOR BRIDGE (4322)	AT PER. CU. YD. ▪	▪
45	734 LIN. FT.	PRESTRESSED CONC. GIRDER (WF50G) (4269)	AT PER. LIN. FT. ▪	▪
46	CALCULATED	DEFICIENT STRENGTH CONC. PRICE ADJUSTMENT (4219)	CALCULATED	-$1.00
47	LUMP SUM	SUPERSTRUCTURE BRIDGE NO. 544/10 (4300)	LUMP SUM	▪
48	LUMP SUM	SUPERSTRUCTURE NEW BRIDGE (4300)	LUMP SUM	▪
49	663 LIN. FT.	BRIDGE RAILING TYPE BP-22 (4410)	AT PER. LIN. FT. ▪	▪
50	442 LIN. FT.	PEDESTRIAN BARRIER (4117)	AT PER. LIN. FT. ▪	▪
51	254 SQ. YD.	BRIDGE APPROACH SLAB (5656)	AT PER. SQ. YD. ▪	▪

ITEM NO.	PLAN QUANTITY	ITEM DESCRIPTION (STANDARD ITEM NUMBER)	PRICE PER UNIT DOLLARS	TOTAL AMOUNT DOLLARS
		STRUCTURE		
52	193 SQ. YD.	BRIDGE APPROACH SLAB BRIDGE NO. 544/10 ( )	AT PER. SQ. YD. ▪	▪
53	LUMP SUM	SCOUR COUNTERMEASURE SHEET PILE WALL ( )	LUMP SUM	▪
54	278 CU. YD.	CELLULAR CONCRETE CLASS 2 ( )	AT PER. CU. YD. ▪	▪
55	4,170 POUND	WELDED WIRE FOR CELLULAR CONC. FILL ( )	AT PER. POUND ▪	▪
56	LUMP SUM	PRE-LOADING SHAFTS ( )	LUMP SUM	▪
57	LUMP SUM	SAND DRAINS ( )	LUMP SUM	▪
		SURFACING		
58	670 TON	CRUSHED SURFACING BASE COURSE (5100)	AT PER. TON ▪	▪
		HOT MIX ASPHALT		
59	692 SQ. YD.	PLANING BITUMINOUS PAVEMENT (5711)	AT PER. SQ. YD. ▪	▪
60	1,020 TON	HMA CL. 1/2 IN. PG 58H-22 (5767)	AT PER. TON ▪	▪
61	CALCULATED	JOB MIX COMPLIANCE PRICE ADJUSTMENT (5830)	CALCULATED	$5,252.00
62	CALCULATED	COMPACTION PRICE ADJUSTMENT (5835)	CALCULATED	$7,471.00
63	CALCULATED	ASPHALT COST PRICE ADJUSTMENT (5837)	CALCULATED	$7,374.00
64	CALCULATED	CYCLIC DENSITY PRICE ADJUSTMENT (6516)	CALCULATED	-$1.00

INFORMATIONAL COPY

INFORMATIONAL COPY

ITEM NO.	PLAN QUANTITY	ITEM DESCRIPTION (STANDARD ITEM NUMBER)	PRICE PER UNIT DOLLARS	TOTAL AMOUNT DOLLARS
		EROSION CONTROL AND ROADSIDE PLANTING		
65	4 EACH	INLET PROTECTION (6471)	AT PER. EACH ▪	▪
66	8 LIN. FT.	COMPOST SOCK (6500)	AT PER. LIN. FT. ▪	▪
67	64 LIN. FT.	COIR LOG (6502)	AT PER. LIN. FT. ▪	▪
68	LUMP SUM	EROSION CONTROL AND WATER POLLUTION PREVENTION (6488)	LUMP SUM	▪
69	471 SQ. YD.	SEEDING, FERTILIZING AND MULCHING (6431)	AT PER. SQ. YD. ▪	▪
70	915 SQ. YD.	TOPSOIL TYPE A (6391)	AT PER. SQ. YD. ▪	▪
71	161 EACH	PSIPE BALDHIP ROSE NO. 1 CONT. (6552)	AT PER. EACH ▪	▪
72	72 EACH	PSIPE BEAKED HAZELNUT NO. 2 CONT. 18" HT (6552)	AT PER. EACH ▪	▪
73	321 EACH	PSIPE BLACK TWINBERRY NO. 1 CONT. (6552)	AT PER. EACH ▪	▪
74	36 EACH	PSIPE CASCARA NO. 2 CONT. 18" HT (6552)	AT PER. EACH ▪	▪
75	134 EACH	PSIPE CLUSTERED ROSE NO. 1 CONT. (6552)	AT PER. EACH ▪	▪
76	179 EACH	PSIPE COASTAL STRAWBERRY NO. 1 CONT. (6552)	AT PER. EACH ▪	▪
77	125 EACH	PSIPE COMMON RUSH NO. 1 CONT. (6552)	AT PER. EACH ▪	▪

INFORMATIONAL COPY

ITEM NO.	PLAN QUANTITY	ITEM DESCRIPTION (STANDARD ITEM NUMBER)	PRICE PER UNIT DOLLARS	TOTAL AMOUNT DOLLARS
		EROSION CONTROL AND ROADSIDE PLANTING		
78	357 EACH	PSIPE CREEPING OREGON-GRAPE NO. 1 CONT. (6552)	AT PER. EACH ▪	▪
79	72 EACH	PSIPE DOUGLAS SPIREA NO. 1 CONT. (6552)	AT PER. EACH ▪	▪
80	72 EACH	PSIPE DOUGLAS-FIR NO. 2 CONT. 18" HT (6552)	AT PER. EACH ▪	▪
81	72 EACH	PSIPE GRAND FIR NO. 2 CONT. 18" HT (6552)	AT PER. EACH ▪	▪
82	42 EACH	PSIPE HARDSTEM BULRUSH NO. 1 CONT. (6552)	AT PER. EACH ▪	▪
83	536 EACH	PSIPE KINNIKINNICK NO. 1 CONT. (6552)	AT PER. EACH ▪	▪
84	322 EACH	PSIPE MOCK ORANGE NO. 1 CONT. (6552)	AT PER. EACH ▪	▪
85	179 EACH	PSIPE OCEANSPRAY NO. 1 CONT. (6552)	AT PER. EACH ▪	▪
86	36 EACH	PSIPE OREGON ASH NO. 2 CONT. 18" HT (6552)	AT PER. EACH ▪	▪
87	107 EACH	PSIPE PACIFIC NINEBARK LIVE STAKE 3 FT (6552)	AT PER. EACH ▪	▪
88	107 EACH	PSIPE RED-OSIER DOGWOOD LIVE STAKE 3 FT (6552)	AT PER. EACH ▪	▪
89	143 EACH	PSIPE SALMONBERRY NO. 1 CONT. (6552)	AT PER. EACH ▪	▪
90	36 EACH	PSIPE SITKA SPRUCE NO. 2 CONT. 18" HT (6552)	AT PER. EACH ▪	▪

INFORMATIONAL COPY

ITEM NO.	PLAN QUANTITY	ITEM DESCRIPTION (STANDARD ITEM NUMBER)	PRICE PER UNIT DOLLARS	TOTAL AMOUNT DOLLARS
		EROSION CONTROL AND ROADSIDE PLANTING		
91	278 EACH	PSIPE SLOUGH SEDGE NO. 1 CONT. (6552)	AT PER. EACH ▪	▪
92	125 EACH	PSIPE SMALL-FRUITED BULRUSH NO. 1 CONT. (6552)	AT PER. EACH ▪	▪
93	642 EACH	PSIPE SNOWBERRY NO. 1 CONT. (6552)	AT PER. EACH ▪	▪
94	72 EACH	PSIPE THIMBLEBERRY NO. 1 CONT. (6552)	AT PER. EACH ▪	▪
95	9 SQ. YD.	PSIPE LIVE BRUSH MATTRESS (6551)	AT PER. SQ. YD. ▪	▪
96	36 LIN. FT.	PSIPE LIVE FASCINE (6549)	AT PER. LIN. FT. ▪	▪
97	471 SQ. YD.	FINE COMPOST (6483)	AT PER. SQ. YD. ▪	▪
98	ESTIMATED	PROJECT AREA WEED AND PEST CONTROL (6546)	ESTIMATED	$10,000.00
99	2,746 SQ. YD.	SOIL AMENDMENT (6530)	AT PER. SQ. YD. ▪	▪
100	3,661 SQ. YD.	BARK OR WOOD CHIP MULCH (6580)	AT PER. SQ. YD. ▪	▪
101	266 LIN. FT.	HIGH VISIBILITY FENCE (6630)	AT PER. LIN. FT. ▪	▪
102	784 LIN. FT.	HIGH VISIBILITY SILT FENCE (6635)	AT PER. LIN. FT. ▪	▪
103	LUMP SUM	ENVIRONMENTAL COMPLIANCE LEAD (6404)	LUMP SUM	▪

INFORMATIONAL COPY

ITEM NO.	PLAN QUANTITY	ITEM DESCRIPTION (STANDARD ITEM NUMBER)	PRICE PER UNIT DOLLARS	TOTAL AMOUNT DOLLARS
		EROSION CONTROL AND ROADSIDE PLANTING		
104	915 SQ. YD.	EROSION CONTROL BLANKET (6455)	AT PER. SQ. YD. ▪	▪
105	LUMP SUM	SEDIMENT FILLED COIR BAGS ( )	LUMP SUM	▪
106	3,217 SQ. YD.	SOIL DECOMPACTION ( )	AT PER. SQ. YD. ▪	▪
107	1,310 LIN. FT.	COIR WRAPPED SOIL LIFTS ( )	AT PER. LIN. FT. ▪	▪
108	1,708 SQ. YD.	COMPOST SEEDING ( )	AT PER. SQ. YD. ▪	▪
		TRAFFIC		
109	371 LIN. FT.	CEMENT CONC. TRAFFIC CURB AND GUTTER (6700)	AT PER. LIN. FT. ▪	▪
110	14 LIN. FT.	EXTRUDED CURB (6727)	AT PER. LIN. FT. ▪	▪
111	326 LIN. FT.	PRECAST CONC. BARRIER TYPE F UNANCHORED (6788)	AT PER. LIN. FT. ▪	▪
112	1,333 LIN. FT.	TEMPORARY BARRIER (6781)	AT PER. LIN. FT. ▪	▪
113	326 LIN. FT.	REMOVING AND RESETTING EXISTING PERMANENT BARRIER (6784)	AT PER. LIN. FT. ▪	▪
114	100 EACH	BARRIER DELINEATOR (6830)	AT PER. EACH ▪	▪
115	2,389 LIN. FT.	PLASTIC LINE (6807)	AT PER. LIN. FT. ▪	▪
116	4 EACH	PLASTIC DRAINAGE MARKING (6881)	AT PER. EACH ▪	▪

INFORMATIONAL COPY

ITEM NO.	PLAN QUANTITY	ITEM DESCRIPTION (STANDARD ITEM NUMBER)	PRICE PER UNIT DOLLARS	TOTAL AMOUNT DOLLARS
		TRAFFIC		
117	0.1 HUNDRED	RECESSED PAVEMENT MARKER (6889)	AT PER. HUNDRED ▪	▪
118	LUMP SUM	PERMANENT SIGNING (6890)	LUMP SUM	▪
119	2,426 LIN. FT.	TEMPORARY PAVEMENT MARKING-LONG DURATION (6896)	AT PER. LIN. FT. ▪	▪
120	884 LIN. FT.	CONDUIT PIPE 2 IN. DIAM. (6945)	AT PER. LIN. FT. ▪	▪
121	LUMP SUM	PROJECT TEMPORARY TRAFFIC CONTROL (6971)	LUMP SUM	▪
122	ESTIMATED	WORK ZONE SAFETY CONTINGENCY (7572)	ESTIMATED	$75,000.00
123	LUMP SUM	PEDESTRIAN SHUTTLE SERVICE ( )	LUMP SUM	▪
124	759 SQ. FT.	CONSTRUCTION SIGNS CLASS A (6982)	AT PER. SQ. FT. ▪	▪
		OTHER ITEMS		
125	CALCULATED	PROJECT PARTNERING (9004)	CALCULATED	$1,000.00
126	LUMP SUM	TYPE B PROGRESS SCHEDULE (7003)	LUMP SUM	▪
127	LUMP SUM	STRUCTURE SURVEYING (7037)	LUMP SUM	▪
128	LUMP SUM	ROADWAY SURVEYING (7038)	LUMP SUM	▪
129	2 EACH	ADJUST MONUMENT CASE AND COVER (7380)	AT PER. EACH ▪	▪
130	421 SQ. YD.	CEMENT CONC. SIDEWALK (7055)	AT PER. SQ. YD. ▪	▪

INFORMATIONAL COPY

ITEM NO.	PLAN QUANTITY	ITEM DESCRIPTION (STANDARD ITEM NUMBER)	PRICE PER UNIT DOLLARS	TOTAL AMOUNT DOLLARS
		OTHER ITEMS		
131	45 LIN. FT.	COATED CHAIN LINK FENCE TYPE 4 (7088)	AT PER. LIN. FT. ▪	▪
132	1 EACH	SINGLE 6 FT. COATED CHAIN LINK GATE (7101)	AT PER. EACH ▪	▪
133	170 SQ. FT.	GRAVITY BLOCK WALL (7164)	AT PER. SQ. FT. ▪	▪
134	LUMP SUM	CLEANING EXISTING DRAINAGE STRUCTURE (7350)	LUMP SUM	▪
135	ESTIMATED	FORCE ACCOUNT PAVEMENT SEAT REPAIR BR. NO. 544/10 (7715)	ESTIMATED	$20,000.00
136	ESTIMATED	FORCE ACCOUNT ROADSIDE RESTORATION (7715)	ESTIMATED	$47,695.20
137	ESTIMATED	FORCE ACCOUNT SHEET PILE PRE-DRILLING (7715)	ESTIMATED	$20,000.00
138	ESTIMATED	ROADSIDE CLEANUP (7480)	ESTIMATED	$10,000.00
139	ESTIMATED	REIMBURSEMENT FOR THIRD PARTY DAMAGE (7725)	ESTIMATED	$5.00
140	CALCULATED	DISPUTES REVIEW BOARD (7726)	CALCULATED	$1.00
141	CALCULATED	FUEL COST ADJUSTMENT (7730)	CALCULATED	$12,600.00
142	CALCULATED	STEEL COST ADJUSTMENT (7731)	CALCULATED	$3,000.00
143	CALCULATED	AGGREGATE COMPLIANCE PRICE ADJUSTMENT (7732)	CALCULATED	-$1.00
144	LUMP SUM	SPCC PLAN (7736)	LUMP SUM	▪
145	30 SQ. YD.	CONSTRUCTION GEOTEXTILE FOR PERMANENT EROSION CONTROL (7554)	AT PER. SQ. YD. ▪	▪

TO THE SECRETARY OF
TRANSPORTATION
OLYMPIA, WASHINGTON

DATE: 10/12/2026
TIME: 11:31 AM
DOT_RGG600

ITEM NO.	PLAN QUANTITY	ITEM DESCRIPTION (STANDARD ITEM NUMBER)	PRICE PER UNIT DOLLARS	TOTAL AMOUNT DOLLARS
			CONTRACT TOTAL :	$

INFORMATIONAL COPY

Failure to return this Declaration as part of the bid proposal package will make the bid nonresponsive and ineligible for award.

NON-COLLUSION DECLARATION

I, by signing the proposal, hereby declare, under penalty of perjury under the laws of the United States that the following statements are true and correct:

1. That the undersigned person(s), firm, association or corporation has (have) not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with the project for which this proposal is submitted.
2. **That by signing the signature page of this proposal, I am deemed to have signed and to have agreed to the provisions of this declaration.**

NOTICE TO ALL BIDDERS

To report rigging activities call:

1-800-424-9071

The U.S. Department of Transportation (USDOT) operates the above toll-free "hotline" Monday through Friday, 8:00 a.m. to 5:00 p.m., eastern time. Anyone with knowledge of possible bid rigging, bidder collusion, or other fraudulent activities should use the "hotline" to report such activities.

The "hotline" is part of USDOT's continuing effort to identify and investigate highway construction contract fraud and abuse and is operated under the direction of the USDOT Inspector General. All information will be treated confidentially and caller anonymity will be respected.

INFORMATIONAL COPY

Certification for Federal-Aid Contracts

INFORMATIONAL COPY

The prospective participant certifies by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

(1) No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan or cooperative agreement.

(2) If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

This certification is material representation of the fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by Section 1352, Title 31, U.S. Code. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each failure.

The prospective participant also agrees by submitting his or her bid or proposal that he or she shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such subrecipients shall certify and disclose accordingly.

Washington State
Department of Transportation

Bidder Questionnaire

Agency Name	Federal Aid Number
Prime Contractor Name	Contract Number
Contract Name	

Firm/Subcontractor Name	Address (incl. ZIP Code)	DBE Status	NAICS Codes	Scope of Work	Firm Age	Firm Gross Receipts

If you have additional Firms or Subcontractors that submitted Bids, please complete additional forms.
All bidders listed on any other forms, including the Subcontractor List, must appear on this form.

Prime Contractor Representative _____ Date _____

INFORMATIONAL COPY

Form Instructions

The following information for each firm that submitted a bid is required as part of 49 CFR 26.11(c)(2):

Firm/Subcontractor Name: Enter the name of each firm or subcontractor who submitted a quote or a bid on the contract.

Address: Enter the main address of the firm/subcontractor. Include the ZIP code.

DBE Status: Enter the DBE status. *Options are DBE and Non-DBE.*

NAICS Codes: Enter the appropriate NAICS Codes for the work the bid was submitted for.

Scope of Work: Enter the scope of the work the bid was submitted for.

Firm Age: Enter the age of the firm.

Firm Gross Receipts: Enter the annual gross receipts. *Options are "Less than $1 million", "$1-$3 million", "$3-$6 million", "$6-$10 million", "$10-$20 million ", "$20-$30.72 million ", "Greater than $30.72 million ".*

INFORMATIONAL COPY

Washington State Department of Transportation

Subcontractor List

Prepared in compliance with RCW 39.30.060 as amended

To Be Submitted with the Bid Proposal

INFORMATIONAL COPY

Project Name _____

Failure to list subcontractors with whom the bidder, if awarded the contract, will directly subcontract for performance of the work of structural steel installation, rebar installation, heating, ventilation and air conditioning, plumbing, as described in Chapter 18.106 RCW, and electrical, as described in Chapter 19.28 RCW or naming more than one subcontractor to perform the same work will result in your bid being non-responsive and therefore void.

Subcontractor(s) with whom the bidder will directly subcontract that are proposed to perform the work of structural steel installation, rebar installation, heating, ventilation and air conditioning, plumbing, as described in Chapter 18.106 RCW, and electrical as described in Chapter 19.28 RCW must be listed below. The work to be performed is to be listed below the subcontractor(s) name.

If RCW 39.30.060 requires a proof of license, the license number of that Subcontractor is required. To the extent the Project includes one or more categories of work referenced in RCW 39.30.060, and no subcontractor is listed below to perform such work, the bidder certifies that the work will either (i) be performed by the bidder itself, or (ii) be performed by a lower tier subcontractor who will not contract directly with the bidder.

Subcontractor Name
(and License Number if required) _____

Work to be performed _____

Subcontractor Name
(and License Number if required) _____

Work to be performed _____

Subcontractor Name
(and License Number if required) _____

Work to be performed _____

Subcontractor Name
(and License Number if required) _____

Work to be performed _____

Subcontractor Name
(and License Number if required) _____

Work to be performed _____

* Bidder's are notified that it is the opinion of the enforcement agency that PVC or metal conduit, junction boxes, etc, are considered electrical equipment and therefore considered part of electrical work, even if the installation is for future use and no wiring or electrical current is connected during the project.

INFORMATIONAL COPY

Contractor Certification
Wage Law Compliance - Responsibility Criteria
Washington State Public Works Contracts

FAILURE TO RETURN THIS CERTIFICATION AS PART OF THE BID PROPOSAL PACKAGE WILL MAKE THIS BID NONRESPONSIVE AND INELIGIBLE FOR AWARD

I hereby certify, under penalty of perjury under the laws of the State of Washington, on behalf of the firm identified below that, to the best of my knowledge and belief, this firm has NOT been determined by a final and binding citation and notice of assessment issued by the Washington State Department of Labor and Industries or through a civil judgment entered by a court of limited or general jurisdiction to have willfully violated, as defined in RCW 49.48.082, and provision of RCW chapters 49.46, 49.48, or 49.52 within three (3) years prior to the date of the Call for Bids.

BIDDER NAME: _____
Name of Contractor/Bidder - Print full legal entity name of firm

By: _____ _____
Signature of authorized person — Print name of person making certifications for firm

Title: _____ Place: _____
Title of person signing certificate — Print city and state where signed

Date: _____

Washington State Department of Transportation

Proposal - Signature Page

The bidder is hereby advised that by signature of this proposal he/she is deemed to have acknowledged all requirements and signed all certificates contained herein.
A proposal guaranty in an amount of five percent (5%) of the total bid, based upon the approximate estimate of quantities at the above prices and in the form as indicated below is attached hereto:

Cash	☐	In the Amount of _____
Cashier's Check	☐	_____ Dollars
Certified Check	☐	**($** _____ **)** Payable to the State Treasurer
Proposal Bond	☐	In the Amount of 5% of the Bid

Receipt is hereby acknowledged of addendum(s) No.(s) _____ , _____ & _____

Signature of Authorized Official(s)

→ _____

_____

Firm Name _____

Address _____

_____

_____

State of Washington Contractor's License No. _____

Federal ID No. _____

Note:

(1) This proposal form is not transferable and any alteration of the firm's name entered hereon without prior permission from the Secretary of Transportation will be cause for considering the proposal irregular and subsequent rejection of the bid.

(2) Please refer to section 1-02.6 of the standard specifications, re: "Preparation of Proposal," or "Article 4" of the Instruction to Bidders for building construction jobs.

INFORMATIONAL COPY